



NOTES:
 1. MATERIAL:
 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 1.2 CONTACT: COPPER ALLOY
 1.3 FITTING NAIL: COPPER ALLOY
 2. FINISH:
 2.1 CONTACT: 50~100u" NICKEL UNDERPLATING OVERALL.
 1:G/F PLATED ON CONTACT AND SOLDER TAIL AREA
 N:100u"~200u" MATT TIN PLATING
 C:15u" GOLD PLATED ON CONTACT
 100u"~200u" MATT TIN PLATING ON SOLDER TAIL AREA
 2.2 FITTING NAIL:50~100u" NICKEL UNDERPLATING OVERALL.
 1:G/F PLATED ON CONTACT AND SOLDER TAIL AREA
 N:100u"~200u" MATT TIN PLATING
 3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
 4. SPEC. PLS. REFER TO PS-50104-XXXX-XXX
 5. PACKAGE PLS. REFER TO 88022-XXXX-U-TRP OR 88022-XXX0-TRP OR 50104-XXXX-XX-TRP
 6. PART NUMBER

P/N LEGEND
 50104-XXX X X-XXX

XXX	HOUSING COLOR	MATERIAL	PACKAGE	HALOGEN FREE
001	BLACK	LCP	50104-XXXX-XX-TRP FOR 30PIN 88022-XXX0-TRP FOR OTHER	HF
S01	BLACK	LCP	88022-XXXX-U-TRP	HF

PACKING
 1:TUBE PACKAGE
 0:TAPE & REEL
 8:TUBE WITH COVER
 7:TAPE & REEL WITH COVER
 5:TUBE WITH MYLAR
 4:TAPE & REEL WITH MYLAR

PLATING
 1:G/F PLATED ON CONTACT AND SOLDER TAIL AREA
 N:MATT TIN PLATING
 C:15u" GOLD PLATED ON CONTACT

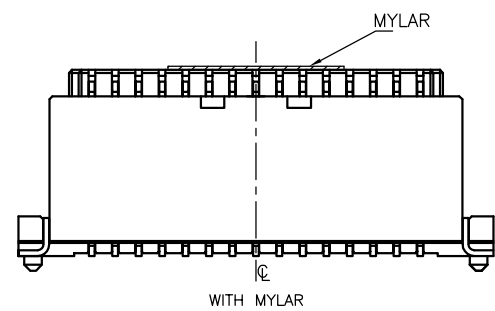

CKT	Dim A	Dim B	Dim C	Dim D
12	4.00	9.00	8.00	5.35
14	4.80	9.80	8.80	6.15
16	5.60	10.60	9.60	6.95
20	7.20	12.20	11.20	8.55
24	8.80	13.80	12.80	10.15
30	11.20	16.20	15.20	12.55
40	15.20	20.20	19.20	16.55
50	19.20	24.20	23.20	20.55
60	23.20	28.20	27.20	24.55
80	31.20	36.20	35.20	32.55

QUALITY SYMBOLS MAJOR CRITICAL GENERAL TOLERANCES (UNLESS SPECIFIED) X. ±0.5 .X ±0.25 .XX ±0.15 .XXX ±0.1 ANGLES ±2°	DRAWN BY Zhu, Wei DATE 19/05/22	
	CHECKED BY Xu, Zhi Yong DATE 19/05/22	
APPROVED BY Xu, Zhi Yong DATE 19/05/22	UNITS mm	SCALE 5:1
SHEET NO. 1 OF 1	SIZE A4	DWG NO. 50104-XXXX-XXX
PART NO. SEE NOTES	REV H	PART NO.