
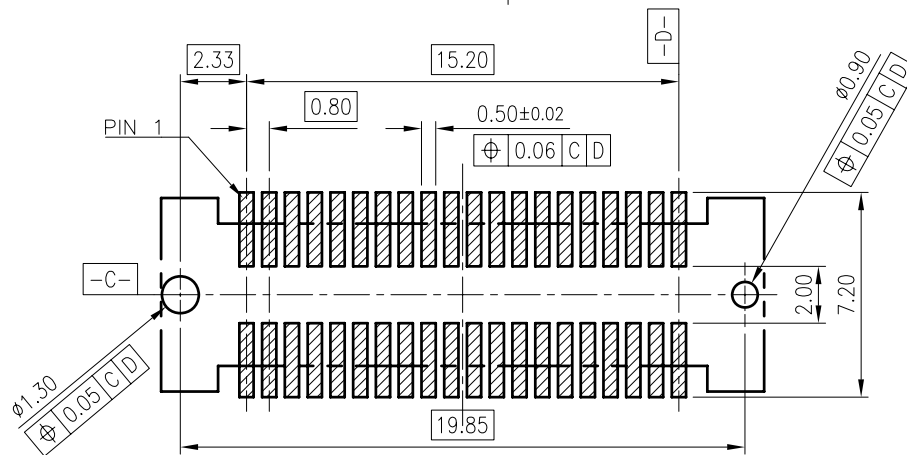


NOTES:

- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:NATURE(IVORY).
 - CONTACT: COPPER ALLOY
 - COVER: STAINLESS STEEL
 - FINISH:
 - CONTACT: 1u"MIN GOLD ON CONTACT AND SOLDER TAILS FOR SELECTVENESS PLATING 50u"MIN NICKEL UNDERPLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
 - THE MODULE CARD REFERENCE MINIPCI EXPRESS CARD ELECTROMECHANICAL SPECIFICATION
 - DATUM D IS THE TOP SURFACE OF PCB
 - PACKAGE PLS. REFER TO 50129-040XX-XXX-TRP
 - SPEC. PLS. REFER TO PS-50128-XXXXX-XXX
- PART NUMBER
50129 - XXX X X-001
- NO OF CKT _____ PLATING _____
PACKING _____ 2: GOLD FLASH ON CONTACT
7:TAPE & REEL WITH COVER

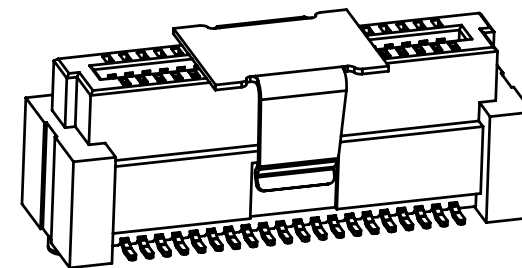

CONNECTOR RECOMMEND P.C.B LAYOUT
GENERAL TOLORANCE ±0.05

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS ϕ \ominus INDICATE CLASSIFICATION DIMENSION \ominus MARK IS CRITICAL DIM. \oplus MARK IS MAJOR DIM.	品名 (TITLE) 0.8 mm PITCH BTB PLUG CONN. SMT D/R S/T TYPE 圖號 (DWG NO.) 50129-xxxxx-xxx	製圖 (DR) GUKEQING 13/06/26 審核 (CHKD) CARL 核准 (APPD) JASON	
表面處理 (FINISH)	比例 (SCALE) 4:1 單位 (UNITS) mm		張數 (SHEET) 1 OF 1 SIZE A4 REV A