
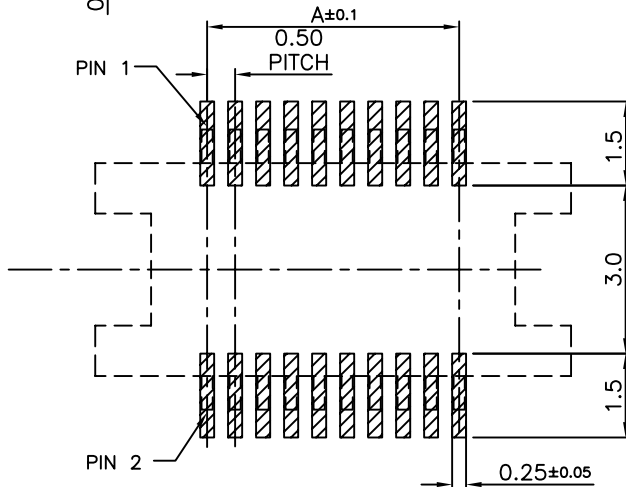


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05
WITH BOSS

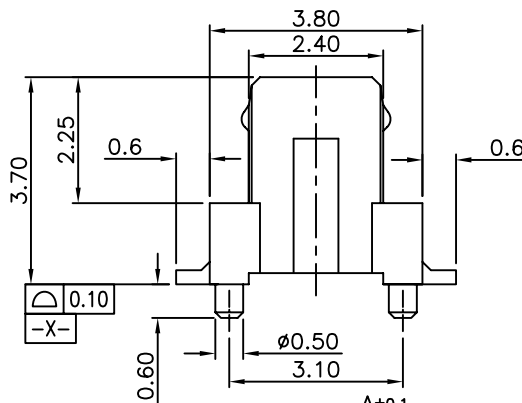

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05
WITHOUT BOSS

Notes:

- MATERIAL:
HOUSING: HIGH TEMP THERMOPLASTIC,UL94V-0
- FINISH:
CONTACT:
1: 50u" MIN. NICKEL UNDERPLATING OVERALL.
GOLD FLASH OVER ALL
P: 50u" MIN. NICKEL UNDERPLATING OVERALL
10u" GOLD ON CONTACT AREA
SOLDER:
1: 50u" MIN. NICKEL UNDERPLATING OVERALL.
GOLD FLASH OVER ALL
P: 50u" MIN. NICKEL UNDERPLATING OVERALL
100u" MIN MATT TIN ON SOLDER AREA
- IR REFLOW CAPABLE TO 260°C PER ACES SPEC.
- SPEC. PLS. REFER TO PS-50150-XXXXX-XXX
- PACK. REFER 88389-XXXXB-TRP.
- PART NUMBER.

50161 - XXX X X - XXX

XXX	Color	Halogen Free	Polarization
001	Black	HF	with boss

Plating
1: Gold Flash all over
P: 10u" GOLD ON CONTACT AREA
100u" MIN MATT TIN ON SOLDER AREA

PACKING
0:TAPE REEL
1:TUBE PACKAGE

CKT	Dim A	Dim B	Dim C
16	3.5	5.5	7.5
20	4.5	6.5	8.5
30	7.0	9.0	11.0
40	9.5	11.5	13.5
50	12.0	14.0	16.0
60	14.5	16.5	18.5
70	17.0	19.0	21.0
80	19.5	21.5	23.5
100	24.5	26.5	28.5
120	29.5	31.5	33.5

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronic Co.,Ltd.	
檢驗尺寸標示 SYMBOLS ⊕ ⊕ INDICATE CLASSIFICATION DIMENSION ⊕ MARK IS CRITICAL DIM. ⊕ MARK IS MAJOR DIM.	品名 (TITLE) 0.5mm BTB D/R RCPT SMT S/T TYPE 圖號 (DWG.NO) 50161-XXXXX-XXX	製圖 (DR) 12/04/21 許紅星 審核 (CHKD) TONY 核准 (APPD) JASON	張數 (SHEET) 1 OF 1 比例 (SCALE) 1:1 單位 (UNITS) mm
表面處理 (FINISH)	⊕	張數 (SHEET)	SIZE REV A4 A