

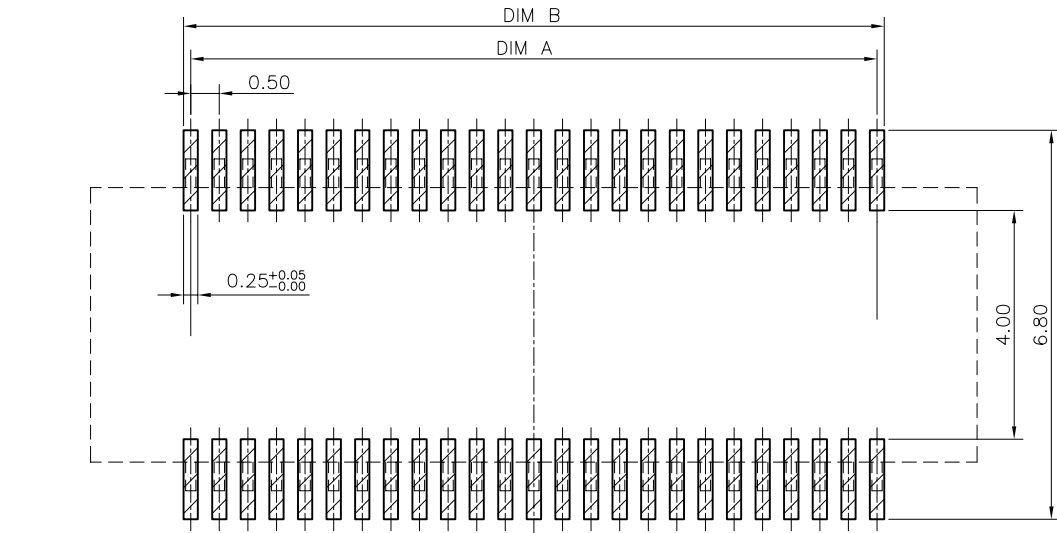
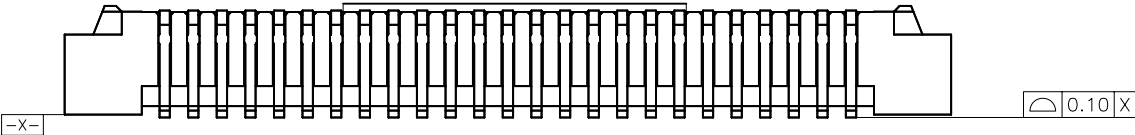
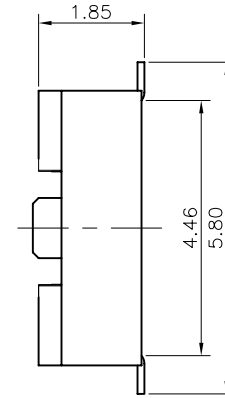


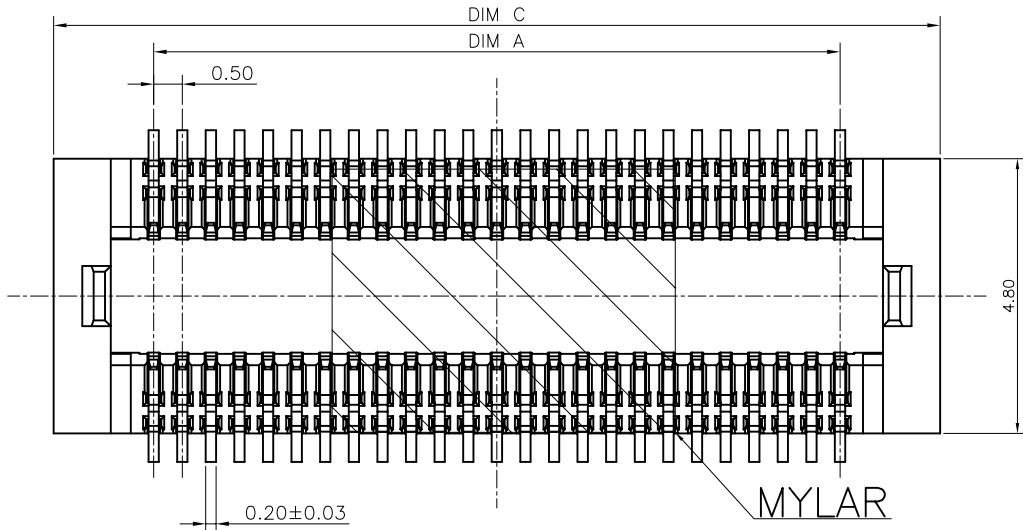

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: HALOGEN FREE PLASTICS, UL94V-0; COLOR:NATURE.
 - 1.2 CONTACT: COPPER ALLOY
2. FINISH:
 - 2.1 CONTACT: GOLD FLASH OVERALL. 50u" MIN. NICKEL UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260° C PER ACES SPEC.
4. SPEC. PLS. REFER TO PS-50168-xxxxx-xxx
5. PACKAGE PLS. REFER TO 50169-XXXXX-TRP

6. PART NUMBER

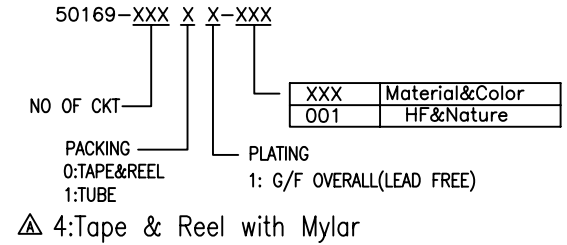

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

CKT	DIM A	DIM B	DIM C	mylar
14	3.00	4.50	6.5	
△ 50	12.00	13.50	15.5	W6T12-50169

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronic Co.,Ltd.	
檢驗尺寸標示 SYMBOLS (C) (M) INDICATE CLASSIFICATION DIMENSION (C) MARK IS CRITICAL DIM. (M) MARK IS MAJOR DIM.		品名 (TITLE) 0.5mm PITCH BTB RCPT CONN SMT D/R S/T MATED H=2.0mm 圖號 (DWG.NO) 50169-XXXXX-XXX	
表面處理 (FINISH)		比例 (SCALE) 單位 (UNITS) 8:1 mm	
製圖 (DR) ROGER 09/03/19 審核 (CHKD) SAM 核准 (APPD) JASON		圖號 (SHEET) 1 OF 1 尺寸 (SIZE) A4 版次 (REV) A	