





- NOTES:
- MATERIAL:
    - HOUSING: Halogen Free PLASTIC, HIGH TEMP UL94V-0;
    - CONTACT: COPPER ALLOY
    - FITTING NAIL: COPPER ALLOY
  - FINISH:
    - CONTACT:
      - 50u"MIN NICKEL UNDER PLATED GOLD FLASH PLATING
      - 120u"MIN NICKEL UNDER PLATED 120u"MIN MATT TIN PLATING
    - SOLDER:
      - 50u"MIN NICKEL UNDER PLATED GOLD FLASH PLATING
      - 120u"MIN NICKEL UNDER PLATED 120u"MIN MATT TIN PLATING
    - FITTING NAIL:
      - 50u"MIN NICKEL UNDER PLATED GOLD FLASH PLATING
      - 120u"MIN NICKEL UNDER PLATED 120u"MIN MATT TIN PLATING
  - APPLICABLE WIRE: AWG #32 O.D=0.38±0.02mm
  - REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
  - SPEC. PLS. REFER TO PS-50208-xxxx
  - PACKAGE PLS. SEE PART NUMBER
  - PART NUMBER

50209-XXX X X-XXX


XXX	COLOR	LOGO	PACKAGE
001	BLACK	ACES	8845-XXXX-TRP
002	BLACK	ACES	8039-XXXX-TRP
003	BLACK	ACES	8036-XXXX-TRP

NO OF CKT: 0:TAPE & REEL

PACKING: 1: Gold Flash over all(Lead Free)  
N:Matt Tin(Lead Free)

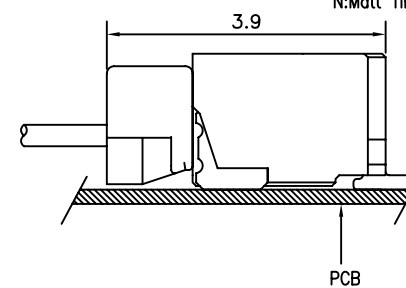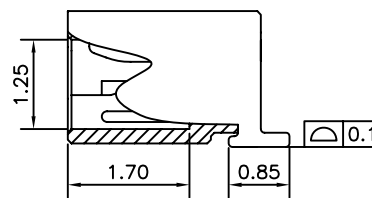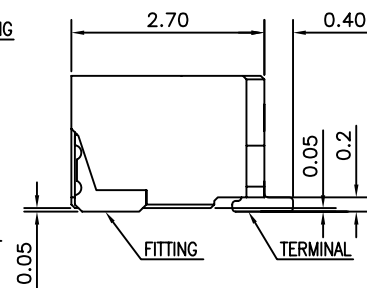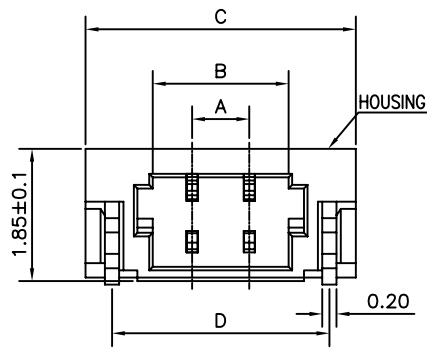

CKT	Dim A	Dim B	Dim C	Dim D
2	0.80	1.90	3.78	3.04
3	1.60	2.70	4.58	3.84
4	2.40	3.50	5.38	4.64
5	3.20	4.30	6.18	5.44
6	4.00	5.10	6.98	6.24
7	4.80	5.90	7.78	7.04
8	5.60	6.70	8.58	7.84
9	6.40	7.50	9.38	8.64
10	7.20	8.30	10.18	9.44
11	8.00	9.10	10.98	10.24
12	8.80	9.90	11.78	11.04
13	9.60	10.70	12.58	11.84
14	10.40	11.50	13.38	12.64
15	11.20	12.30	14.18	13.44
16	12.00	13.10	14.98	14.24
17	12.80	13.90	15.78	15.04
18	13.60	14.70	16.58	15.84
19	14.40	15.50	17.38	16.64
20	15.20	16.30	18.18	17.44



一般公差 <b>TOLERANCES</b> X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		<b>宏致電子股份有限公司</b> <b>Aces Electronic Co.,Ltd.</b>	
檢驗尺寸標示 <b>SYMBOLS</b> (C) (M) INDICATE CLASSIFICATION DIMENSION (C) MARK IS CRITICAL DIM. (M) MARK IS MAJOR DIM.	品名 (TITLE) 0.8mm Pitch WTB SMT R/A TYPE 圖號 (DWG.NO) 50209-XXXXX-XXX	製圖 (DR) 11/12/15 審核 (CHKD) Sam 核准 (APPD) Jason	YUXIANG Sam Jason
表面處理 (FINISH)	比例 (SCALE) 10:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1 尺寸 (SIZE) A4 頁碼 (REV) B