
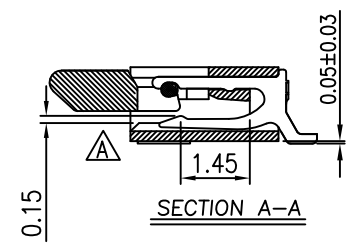


- NOTES:
- MATERIAL:
    - HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0;
    - CONTACT: COPPER ALLOY
    - FITTING NAIL:COPPER ALLOY
    - LATCH: THERMOPLASTIC, HIGH TEMP.,UL94V-0;
  - FINISH:
    - CONTACT:
      - 50~100u" MIN. NICKEL UNDER PLATING  
GOLD FLASH PLATING OVER ALL
      - N: 50~100u" MIN. NICKEL UNDER PLATING  
100~200u" MIN. MATTE TIN PLATING OVERALL
    - FITTING NAIL:
      - 50~100u" MIN. NICKEL UNDER PLATING  
GOLD FLASH PLATING OVER ALL
      - N: 50~100u" MIN. NICKEL UNDER PLATING  
100~200u" MIN. MATTE TIN PLATING OVERALL
  - REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
  - SPEC. PLS. REFER TO PS-50507-XXXX-XXX
  - PACKAGE PLS. REFER TO 88195-XXXX-TRP
  - PART NUMBER

P/N LEGEND

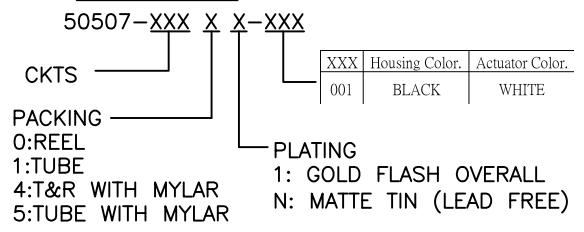

CKTS	DIM A	DIM B	DIM C	CKTS	DIM A	DIM B	DIM C
	±0.05	±0.25	±0.20		±0.05	±0.25	±0.20
4	1.50	7.3	3.0	29	14.00	19.8	10.0
5	2.00	7.8		30	14.50	20.3	
6	2.50	8.3		31	15.00	20.8	
7	3.00	8.8		32	15.50	21.3	
8	3.50	9.3		33	16.00	21.8	
9	4.00	9.8		34	16.50	22.3	
10	4.50	10.3		35	17.00	22.8	
11	5.00	10.8		36	17.50	23.3	
12	5.50	11.3		37	18.00	23.8	
13	6.00	11.8		38	18.50	24.3	
14	6.50	12.3	39	19.00	24.8		
15	7.00	12.8	40	19.50	25.3		
16	7.50	13.3	41	20.00	25.8		
17	8.00	13.8	42	20.50	26.3		
18	8.50	14.3	43	21.00	26.8		
19	9.00	14.8	44	21.50	27.3		
20	9.50	15.3	45	22.00	27.8		
21	10.00	15.8	46	22.50	28.3		
22	10.50	16.3	47	23.00	28.8		
23	11.00	16.8	48	23.50	29.3		
24	11.50	17.3	49	24.00	29.8		
25	12.00	17.8	50	24.50	30.3		
26	12.50	18.3	51	25.00	30.8		
27	13.00	18.8	52	25.50	31.3		
28	13.50	19.3	53	26.00	31.8		

一般公差 <b>TOLERANCES</b> X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		<b>宏致電子股份有限公司</b> <b>Aces Electronic Co.,Ltd.</b>	
檢驗尺寸標示 <b>SYMBOLS</b> Ⓞ Ⓢ INDICATE CLASSIFICATION DIMENSION Ⓞ MARK IS CRITICAL DIM. Ⓢ MARK IS MAJOR DIM.	品名(TITLE) <b>0.5 mm ZIF Easy-on FPC</b> S/T R/A H=1.5 mm	製圖(DR) 11/04/12 TYX 審核(CHKD) CARL	核准(APPD) JASON
表面處理(FINISH)	圖號(DWG.NO) <b>50507-XXXXX-XXX</b>	比例(SCALE) 6:1	單位(UNITS) mm
張數(SHEET) 1 OF 1		尺寸(SIZE) A4	版次(REV) C