


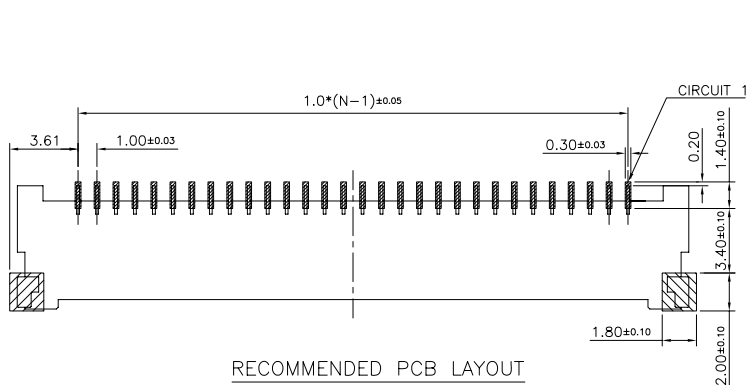


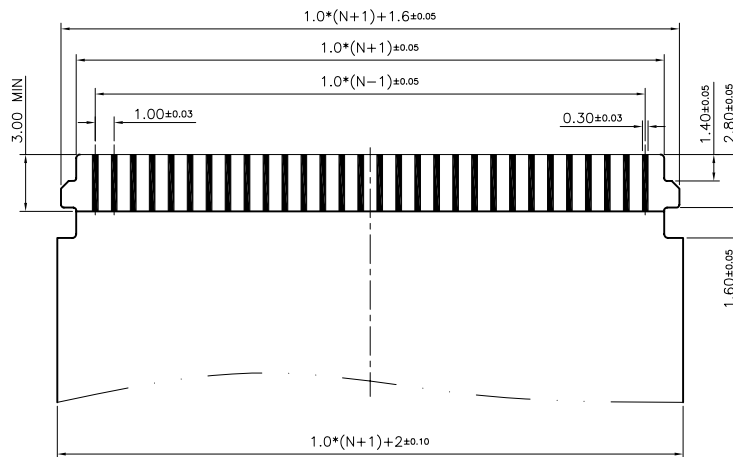



RECOMMENDED PCB LAYOUT

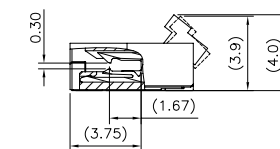

APPLICABLE FPC
RECOMMENDED DIMENSION
(THICKNESS:0.3±0.03)

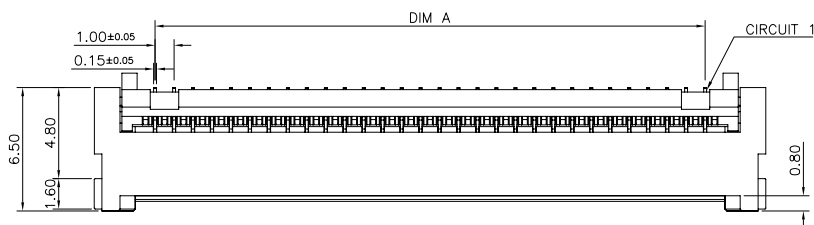

ACTUATOR OPENED STATE

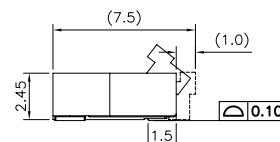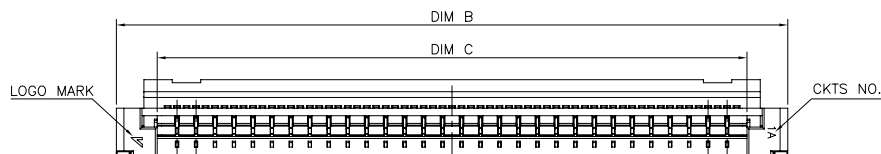

ACTUATOR CLOSED STATE

NOTES:

- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR IS BLACK;
 - CONTACT: COPPER ALLOY
 - FITTING NAIL: COPPER ALLOY
 - LATCH: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR IS NATURAL;
- FINISH:
 - CONTACT:
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - 1:1u" MIN GOLD PLATING ON CONTACT AND 3u" MIN GOLD ON SOLDER
 - FITTING NAIL:
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - N:80~120u" MATT TIN PLATING
- REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
- SPEC. PLS. REFER TO PS-50698-XXXXX-XXX
- PACKAGE PLS. REFER TO 50698-XXXXX-XX-TRP


6. PART NUMBER

50698-XXX X X-001

NO OF CKT
PACKING
0:TAPE&REEL
1:TUBE

Housing Color.	Actuator Color.
001	BLACK
	WHITE

PLATING
1:1u" MIN GOLD PLATING ON CONTACT AND 3u" MIN GOLD ON SOLDER

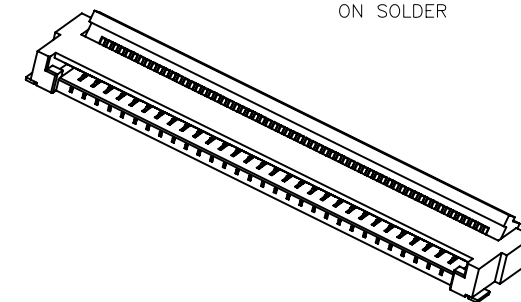

CKT	DIM A	DIM B	DIM C
30	29.00	35.40	31.10
32	31.00	37.40	33.10

一般公差 TOLERANCES X ±0.50 XX ±0.15 X ±0.25 XXX ±0.10 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS ① ② INDICATE CLASSIFICATION DIMENSION ① MARK IS CRITICAL DIM. ② MARK IS MAJOR DIM.	品名 (TITLE) 1.0 PITCH EASY ON FFC/FPC CONN.SMT R/A D/C /TYPE		製圖 (DR)Huang,Shun Sen 17/10/30
	圖號 (DWG NO.) 50698-XXXXX-XXX		審核 (CHKD) Lu,Jing Quan
表面處理 (FINISH)	比例 (SCALE) 3:1	單位 (UNITS) mm	核准 (APPD) hsieh,fu yu
		張數 (SHEET) 1 OF 1	SIZE A4
			REV C