


RECOMMENDED P.C.B. LAYOUT (COMPONENT SIDE)

(P.C.B. LAYOUT TOLERANCE:±0.05)
THICKNESS 1.2mm

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP. UL94V-0.
 - 1.2 CONTACT: COPPER ALLOY.
 - 1.3 BOARD LOCK: COPPER ALLOY.
2. FINISH:
 - 2.1 CONTACT:
 - GOLD FLASH OVERALL.
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - 2.2 HOOK:
 - 50u" MIN. NICKEL UNDER PLATING OVER ALL
 - 120u" MIN. PURE TIN PLATING OVER ALL
3. REFLOW SOLDER CAPABLE TO 260° C PER ACES SPEC.
4. SPEC.PLS REFER TO PS-50975-XXXX-XXX
5. PACKAGE PLS REFER TO 50969-XXXX-TRP
6. PART NUMBER

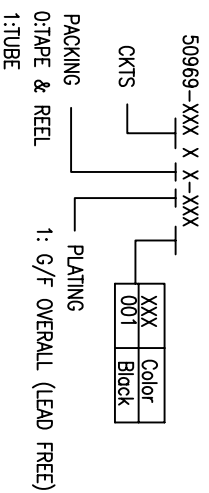

REV	0	ECN-0908007	終極圖紙 (APD980222)	09/08/03	Govin
REV	1	ECN-0906112	NEW DRAWING (APD980222)	09/06/16	Govin
REV		REVISION DESCRIPTION	DATE	DATE	SIGNATURE

一般公差 X ±0.5 XX ±0.15 XXX ±0.1 ANGLES 1.5°		檢驗尺寸標示 STAPOLS ① ② INDICATE CLASSIFICATION DIMENSION ③ MARK IS MAJOR DIM.		表面處理 (FINISH) ④ MARK IS CRITICAL DIM.	
宏致電子股份有限公司 Aces Electronic Co.,Ltd.		品名 (TITLE) 2.0 mm Battery Conn. Male 1/H R/A H=3.3mm 圖號 (DRAWING NO) 50969-XXXXX-XXX		製圖 (DRW) 09/09/16 審核 (CHKD) SAM	
比例 (SCALE) 4:1		單位 (UNITS) mm		核准 (APPD) 1 OF 1 JANSON	
張數 (SHEET) 1		尺寸 (SIZE) A4		版本 (REV) 0	