



**NOTES:**

**1. MATERIAL:**

1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,  
UL94V-0; COLOR:BLACK.

1.2 CONTACT: COPPER ALLOY

**2. FINISH:**

2.1 CONTACT:  
GOLD FLASH OVER ALL.  
50u" MIN. NICKEL UNDERPLATING OVERALL.

3. SPEC. PLS. REFER TO PS-50972-XXXXX-XXX.

4. PACKING SPEC. PLS. REFFER TO 50972-XXXXX-TRP.

5. PART NUMBER





50972-XXX X X-XXX

NO OF CKT

PACKING  
0:TAPE REEL


XXX	DIM D
001	1.00
002	1.50

CONTACT PLATING  
1: G/F OVER ALL

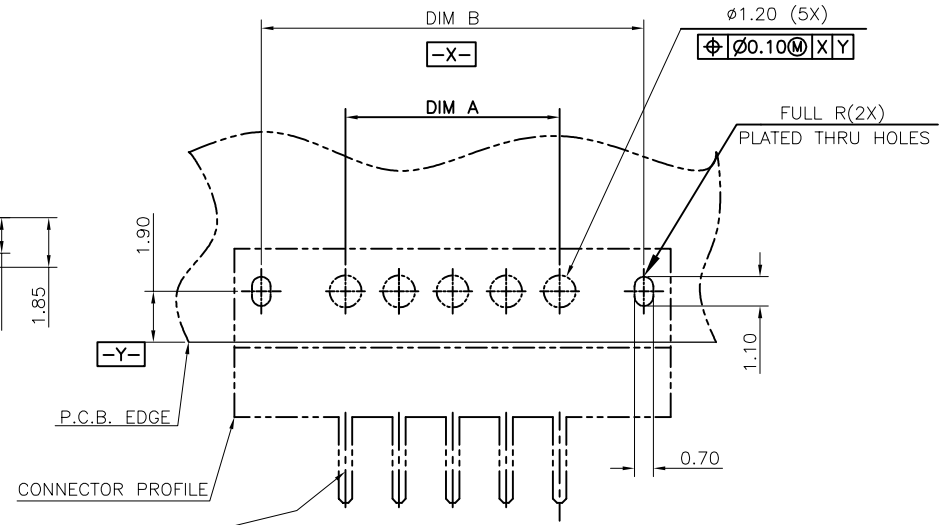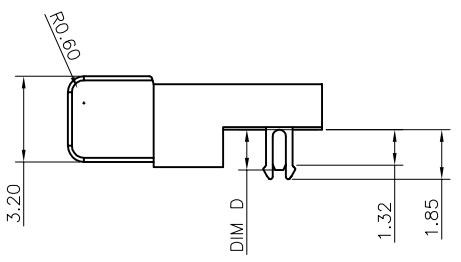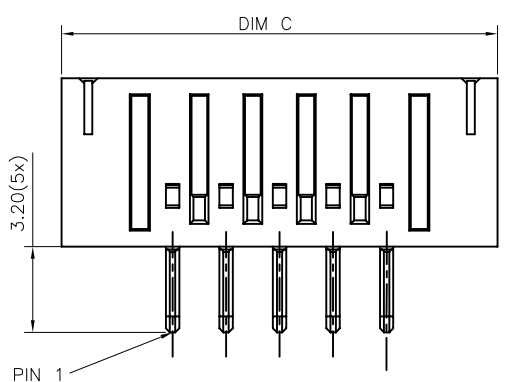

**RECOMMENDED P.C.B. LAYOUT**

TOLERANCE ±0.05 mm

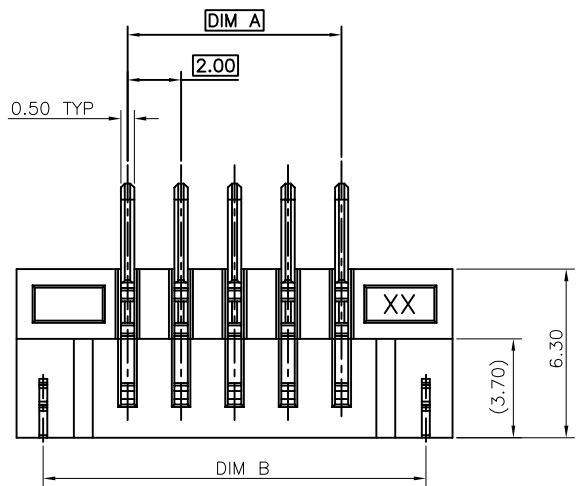

CKT	A	B	C
005	8.00	14.30	16.30
006	10.00	16.30	18.30

QUALITY SYMBOLS MAJOR Ⓢ CRITICAL Ⓢ	DRAWN BY Sun,Ya Jie DATE 2019/07/23	
GENERAL TOLERANCES ( UNLESS SPECIFIED )	CHECKED BY Xu,Zhi Yong DATE 2019/07/23	
X. ±0.5 .X ±0.25 .XX ±0.15 .XXX ±0.1 ANGLES ±2°	APPROVED BY Xu,Zhi Yong DATE 2019/07/23	TITLE 2.00MM BATTERY T/H R/A H=1.7 CONN
UNITS mm	SCALE 4:1	SIZE A4
	SHEET NO. 1 OF 1	REV B
		REF. NO. N/A
		DWG. NO. 50972-XXXXX-XXX