



WITH COVER DRAWING
SCALE 1:2




- NOTES:
- MATERIAL:
 - 1.1 HOUSING: HALOGEN FREE PLASTICS UL 94V-0
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 FITTING NAIL: COPPER ALLOY
 - FINISH:
 - 2.1 CONTACT:
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - GOLD 5u" PLATING ON CONTACT AREA.
 - GOLD FLASH PLATING ON SOLDER AREA.
 - 2.2 FITTING NAIL:
 - 100u" MIN. TIN PLATING OVERALL
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260C.
 - WAVE SOLDER CAPABLE TO 260C PER ACES SPEC.
 - SPEC. PLS. REFER TO PS-50975-XXXX-XXX
 - PACKAGE PLS. REFER TO 50977-XXXX-XXX-TRP(WITHOUT COVER) 50977-XXXX-XXX-TRP-C(WITH COVER)

7. PART NUMBER

2. P/N LEGEND:

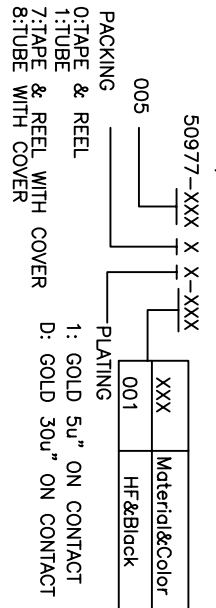

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05



CONNECTOR PROFILE

一般公差 TOLERANCES X ±0.3 Y ±0.15 ANGLES ±2°		檢驗尺寸標示 SYMBOLS		宏致電子股份有限公司 Aces Electronic Co.,Ltd.	
④ MARK IS CRITICAL DIM. ⑤ MARK IS MAJOR DIM.		品名 (TITLE) 2.00mm Battery Conn. Male DIP R/A Type H=4.2 圖號 (DRAWING NO) 50977-XXXXXX-XXX		製圖 (DRW) 10/11/17 審核 (CHKD) SAM	
表面處理 (FINISH) 4:1		單位 (UNITS) mm		核准 (APPD) JASON	
比例 (SCALE) 4:1		張數 (SHEET) 1 OF 1		SIZE A4 REV C	