
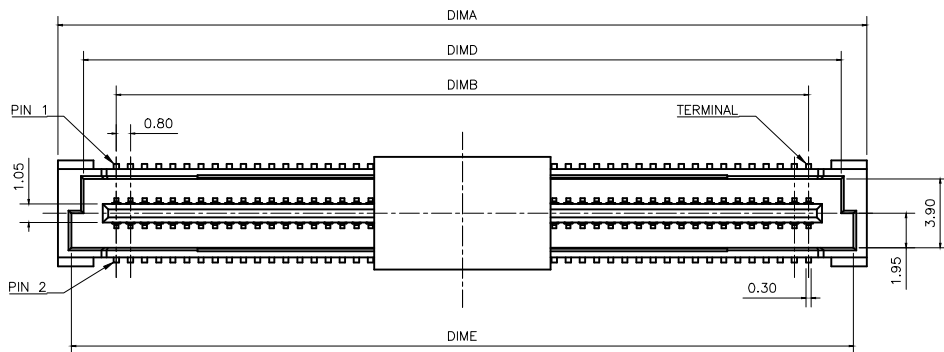


RECOMMEND PCB LAYOUT
TOLERANCE±0.05mm

CKT	DIM A	DIM B	DIM C	DIM D	DIM E
60	29.8	23.2	28.2	26.9	28.3
100	45.8	39.2	44.2	42.9	44.3
120	53.8	47.2	52.2	50.9	52.3



NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0.COLOR:NATURE
- 1.2 CONTACT: COPPER ALLOY.
- 1.3 COVER: THERMOPLASTIC. COLOR:BLACK

2. FINISH:

2.1 CONTACT:

50~100u" NICKEL UNDERPLATING OVERALL.

P: 8u" MIN GOLD ON CONTACT AND
GOLD FLASH ON SOLDER

C: 15u" GOLD ON CONTACT AND
GOLD FLASH ON SOLDER

S: 15u" GOLD ON CONTACT AND
1u"MIN GOLD ON SOLDER

3. REFLOW SOLDER CAPABLE TO 260°C
PER ACES SPEC.

4. SPEC.PLS REFER TO PS-51039-XXXX-XXX

5. PACKAGE PLS REFER TO 51038-XXXX-XX-TRP

6. PART NUMBER

51038-XXX X X-XXX

CKTS

XXX	Material&Color
001	LCP&NATURE

PLATING


P:8u" MIN GOLD ON CONTACT(LEAD FREE)

C:15u" GOLD ON CONTACT(LEAD FREE)

S:15u" GOLD ON CONTACT
1u"MIN GOLD ON SOLDER

PACKING

7:TAPE REEL& WITH COVER

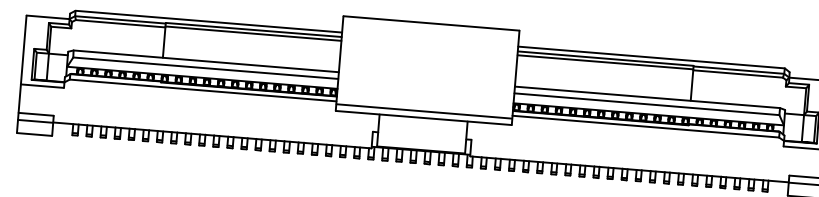

QUALITY SYMBOLS		DRAWN BY		DATE		ACES ELECTRONICS	
MAJOR	Ⓜ	TSO ICHIAO	23/08/01	CHECKED BY	DATE		
CRITICAL	Ⓢ	Chen, Chun Yuan	23/08/01	APPROVED BY	DATE	TITLE	
GENERAL TOLERANCES (UNLESS SPECIFIED)		Huang Kuo Hua	23/08/01			0.8 mm PITCH BTB PLUG CONN.SMT D/R S/T TYPE	
X.	±0.5	UNITS	mm	SCALE	1 : 1	SIZE	A4
.XX	±0.25			SHEET NO.	1 OF 1	DWG NO.	51038-XXXX-XXX
.XXX	±0.1			REV	C	PART NO.	SEE NOTES
ANGLES	±2°						