


RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE  $\pm 0.05$

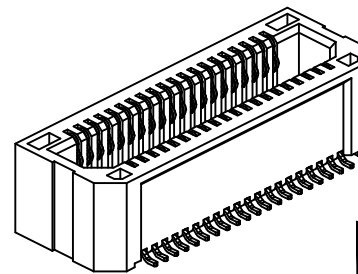

NOTES:

1. MATERIAL:
  - 1.1 HOUSING: SOMIKASUPER LCP E6808L-BLACK, HIGH TEMP.,UL94V-0
  - 1.2 CONTACT: PHOSPHOR BRONZE(C5240-EH)
2. FINISH:
 

CONTACT:  
CONTACT:SEE ORDER INFORMATION.  
UNDERPLATING: 50~100u" NICKEL OVERALL
3. SPEC. PLS. REFER TO PS-51093-XXXXX-XXX
4. PACKAGE PLS. REFER TO 51092-XXXXR-XX
5. PART NUMBER

51092-XXX X X- 001

NO OF CKT: |

PACKING: |

- 0: TAPE & REEL
- 4: T&R WITH MYLAR

PLATING: |

- 1:G/F ON CONTACT AND SOLDER
- C:15u" GOLD ON CONTACT AND G/F PLATING ON SOLDER.

60	14.50	16.80	18.20
40	9.50	11.80	13.20
CKTS	DIM A	DIM B	DIM C

<b>QUALITY SYMBOLS</b> MAJOR Ⓢ CRITICAL Ⓢ	DRAWN BY TSO I CHIAO 22/06/19	DATE 22/06/19	
	CHECKED BY Chen, Chun Yuan 22/06/19	DATE 22/06/19	
<b>GENERAL TOLERANCES (UNLESS SPECIFIED)</b> .X ±0.5 .X ±0.25 .XX ±0.15 .XXX ±0.1 ANGLES ±2°	APPROVED BY Huang Kuo Hua 22/06/19	DATE 22/06/19	SIZE A4
	UNITS mm		DWG NO. 51092-XXXXX-XXX
	SCALE 2.5 : 1	SHEET NO. 1 OF 1	REV B
			PART NO. SEE NOTES