


NOTES:

- MATERIAL:
 - HOUSING: LCP, UL94V-0. COLOR: NATURAL. UL-POLYPLASTICS-LCP(E473i)(BEIGE)
 - CONTACT: C5191-H(T=0.2)
 - FITTING NAIL: C2680-H(T=0.2)
 - COVER SHELL: SUS304-1/2H(T=0.2)
- FINISH:
 - CONTACT: 50u" MIN NICKEL UNDERPLATING OVERALL.
8:10u" MIN GOLD PLATING ON CONTACT AREA.
 - SOLDER: 50u" MIN NICKEL UNDERPLATING OVERALL.
8:40u" MIN MATT TIN PLATING ON SOLDER AREA.
 - FITTING NAIL:
 - 50u" MIN NICKEL UNDERPLATING OVERALL.
 - 80u" MIN MATT TIN PLATING ON OVER ALL.
- TAILS COPLANARITY TO BE 0.10 MAX
IN 240 CIRCUITS, TAILS COPLANARITY TO BE 0.12 MAX
- REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
- SPEC. PLS REFER TO PS-51153-XXXX-XXX
- PACKAGE PLS REFER TO 51153-XXXX-XX-TRP
- PART NUMBER

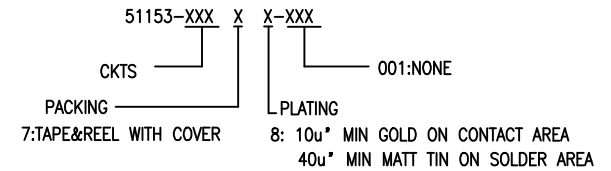

CKT.	Dim A	Dim B	Dim C	Dim D
20	14.22	5.715	9.02	10.62
40	20.57	12.065	15.37	16.97
80	33.27	24.765	28.07	29.67

QUALITY SYMBOLS MAJOR (M) CRITICAL (C)	DRAWN BY HU YANG	DATE 22/12/12	ACES ELECTRONICS TITLE 0.635mm pitch BTB Rcpt. conn SMT D/R S/T Type
	CHECKED BY BRAVE	DATE 22/12/12	
GENERAL TOLERANCES (UNLESS SPECIFIED) X ± 0.5 .X ± 0.25 .XX ± 0.15 .XXX ± 0.1 ANGLES ± 2°	UNITS mm		SIZE A4
	SCALE 2:1	SHEET NO. 1 OF 1	DWG NO. 51153-XXXX-XXX
		REV B	PART NO. SEE NOTES