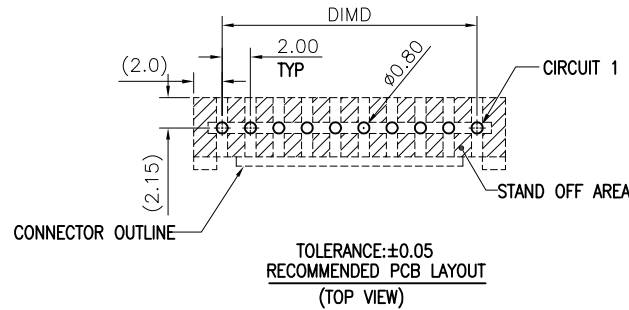
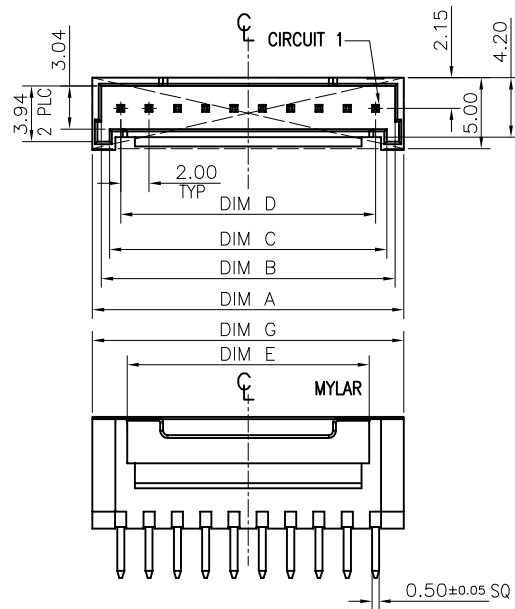


NOTES:

1.MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0. COLOR:NATURAL.
- 1.2 CONTACT: COPPER ALLOY.

2.FINISH:

2.1 CONTACT:

C:50~100u" NICKEL UNDERPLATING OVERALL.

CONTACT AREA: GOLD 15u" MIN

SOLDER TAIL: GOLD 1u" MIN

2:50~100u" NICKEL UNDERPLATING OVERALL.

CONTACT AREA: GOLD FLASH OVERALL

SOLDER TAIL: GOLD FLASH OVERALL

N:50u"~100u"NICKEL OVERALL

100~180u" MATT TIN OVERALL

3.REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.

4.SPEC.PLS REFER TO PS-51210-XXXX-XXX

5.PART NUMBER

51209-XXX X X-XXX

CKTS
PACKING
1:TUBE
3:BAG
0:TAPE REEL
4:TAPE&REEL WITH MYLAR

XXX	LOGO	DIMG	PACKING
001	ACES	3.50	/
002	ACES	1.10	51209-XXXX-06-TRP
003	ACES	2.10	/
004	ACES	2.10	51209-XXXX-XX-TRP


PLATING

C:CONTACT AREA: GOLD 15u" MIN

SOLDER TAIL: GOLD 1u" MIN

2:GOLD FLASH OVERALL

N: MATT TIN ON CONTACT FOR LEAD FREE



CKTS	DIMA	DIMB	DIMC	DIMD	DIME	DIMF	M/S (G)
004	10.00	8.74	7.58	6.00	5.10	4.00	10.0
007	16.00	14.74	13.58	12.00	11.10	10.00	XX
010	22.00	20.74	19.58	18.00	17.10	16.00	XX
012	26.00	24.74	23.58	22.00	21.10	20.00	XX

QUALITY SYMBOLS MAJOR  CRITICAL 	DRAWN BY GUOFEI		DATE '22/10/24		 TITLE 2.00mm WTB WAFER CONN. T/H S/T TYPE SIZE A4 DWG NO. 51209-XXXX-XXX REV H SHEET NO. 1 OF 1 PART NO. SEE NOTES	
	CHECKED BY BRAVE		DATE '22/10/24			
	APPROVED BY BRAVE		DATE '22/10/24			
	UNITS mm					
GENERAL TOLERANCES (UNLESS SPECIFIED) X. ±0.5 .X ±0.25 .XX ±0.15 .XXX ±0.1 ANGLES ±2°	SCALE 5:1		SHEET NO. 1 OF 1		REV H	