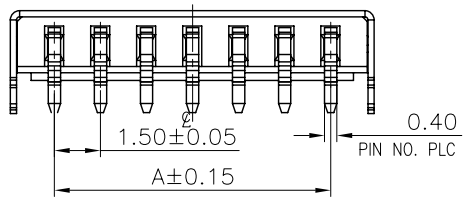

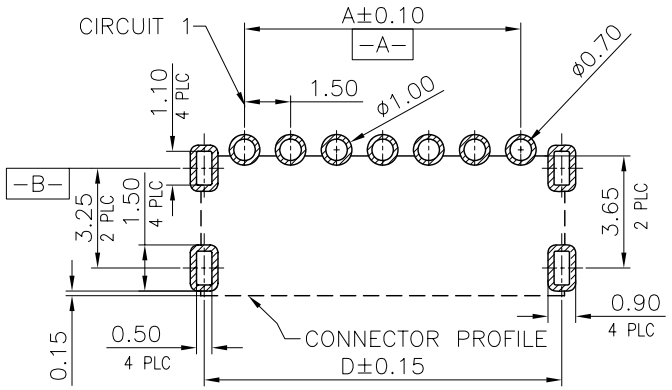

TOLORANCE ±0.05

RECOMMEND P.C.B LAYOUT(THK:1.0MM)

NOTES:
1. MATERIAL:
   1.1 HOUSING:PA9T, UL 94 V-0.(BLACK)
   1.2 CONTACT: COPPER ALLOY
   1.3 SHELL:STAINLESS STEEL/THICKNESS=0.20MM
2. FINISH:
   2.1 CONTACT:
   50~100u" NICKEL UNDERPLATING OVERALL.
   1:CONTACT GOLD FLASH ON CONTACT&SOLDER AREA.
   2.2 SHELL:
   50~100u" NICKEL UNDERPLATING OVERALL.
   1:SOLDER TAILS: GOLD FLASH ON SOLDER AREA.
3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. SPEC. PLS. REFER TO PS-51221-xxxxx-xxx
5. PACKAGE PLS SEE P/N.
6. PART NUMBER

51221-XXX X X-XXX
CKTS
PACKING
0:TAPE & REEL 1: G/F (LEAD FREE)
1:TUBE
PLATING
XXX COLOR
001 BLACK

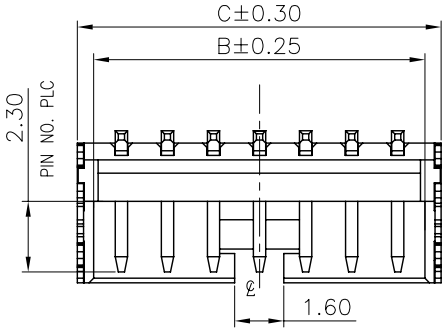

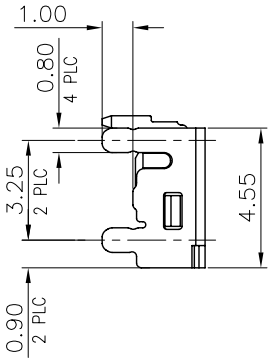

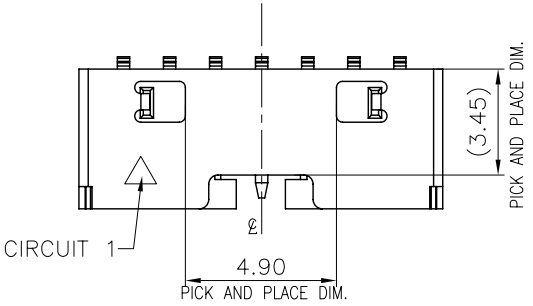

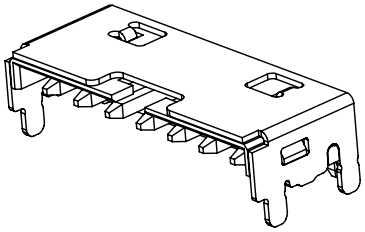

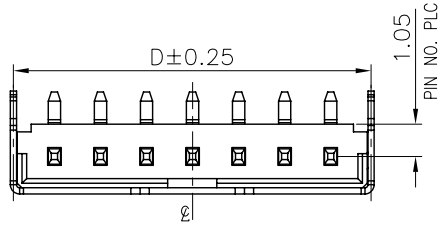

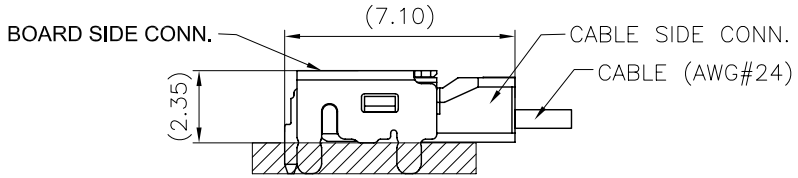

MATING CONDITION (REF.)

CKT	Dim A	Dim B	Dim C	Dim D
7	9.00	10.75	11.85	11.65

一般公差
TOLERANCES
X. ±0.5 .XX ±0.15
.X ±0.25 .XXX ±0.1
ANGLES ±2°

檢驗尺寸標示
SYMBOLS Ⓒ Ⓜ INDICATE CLASSIFICATION DIMENSION
Ⓒ MARK IS CRITICAL DIM.
Ⓜ MARK IS MAJOR DIM.

表面處理 (FINISH)

宏致電子股份有限公司
Aces Electronics Co.,Ltd.

品名 (TITLE)
1.5mm WTB Wafer Conn.
SMT R/A Type

圖號 (DWG NO.)
51221-XXXXX-XXX

製圖 (DR) 13'/06/17 SKY
審核 (CHKD) JERRY
核准 (APPD) JASON

比例 (SCALE) 4:1
單位 (UNITS) mm
張數 (SHEET) 1 OF 1
SIZE A4
REV 0