

MATED CONDITION

NOTES:

1. MATERIAL:

- ① HOUSING: THERMOPLASTIC HIGH TEMP.,UL94V-0,
- ② COVER: THERMOPLASTIC HIGH TEMP.,UL94V-0
- ③ CONTACT: COPPER ALLOY

2. FINISH:

2.1 CONTACT:

- 50u" MIN. NICKEL UNDERPLATING OVERALL AND GOLD FLASH PLATING
- 12u" MIN. GOLD ON CONTACT AREA




3. APPLICABLE WIRE:

AWG#26 UL10064 OD:0.95+0.05/-0.03MM


4. COMPONENT LOAD PER 530MM TUBE: 40PCS

5. WITH 51309 MATTING


6. PART NUMBER: 51308-006 X X -001

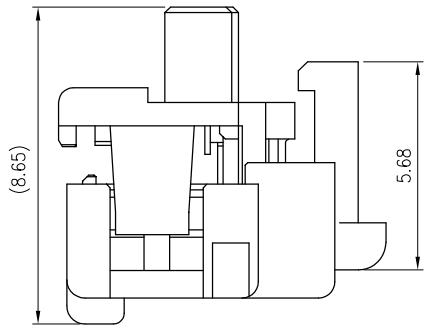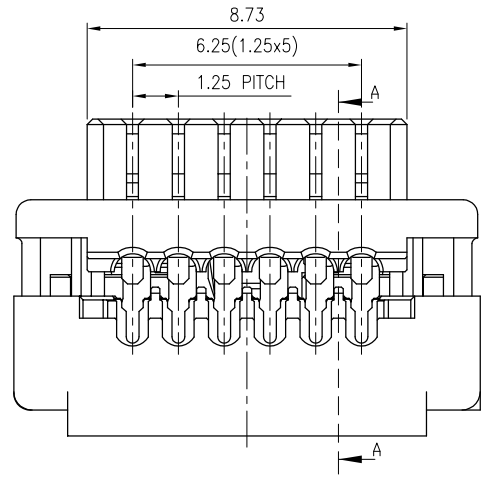



BEFORE CABLE ASSEMBLY

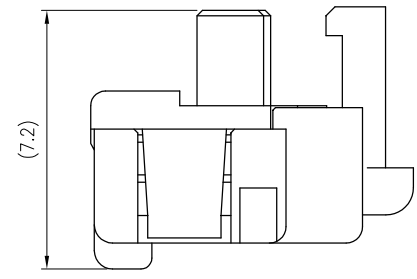


AFTER CABLE ASSEMBLY

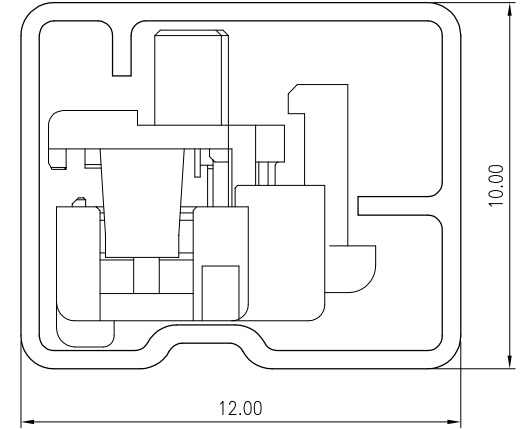

TUBE SECTION

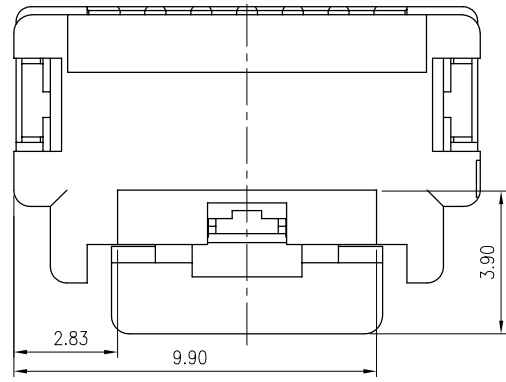

SECTION A-A

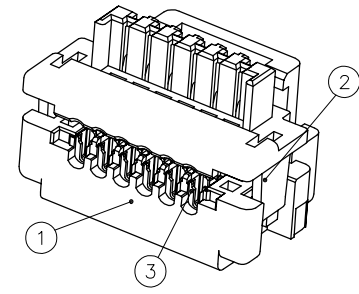

一般公差 TOLERANCES X ±0.5 .XX ±0.15 X ±0.25 .XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS ⊕ ⊗ INDICATE CLASSIFICATION DIMENSION ⊕ MARK IS CRITICAL DIM. ⊗ MARK IS MAJOR DIM.		品名 (TITLE) 1.25mm IDC FEMALE	製圖 (DR) 17/08/18 Chan, Ching Jung 審核 (CHKD) Liu, Yuan Huang
		圖號 (DWG NO.) 51308-XXXXX-XXX	核准 (APPD) Hisatomi, Kazukuni
表面處理 (FINISH)	比例 (SCALE) 5:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1
			SIZE A4
			REV B