

DATUM Z IS THE PCB SOLDER SURFACE  
RECOMMENDED P.C.B LAYOUT  
TOLERANCE=±0.05mm

NOTES:

1. MATERIAL:

1.1 HOUSING: POLYIMIDE UL94V-0; COLOR:Natural.


1.2 CONTACT: COPPER ALLOY,TIN PLATING ON CONTACT AND SOLDER.

1.3 FITTING NAIL: COPPER ALLOY , TIN OVER NICK PLATE

2. SPEC. PLS. REFER TO PS-51365-XXXXX-XXX

3. PACKAGE PLS. REFER TO 51365-XXXXX-XX-TRP

4. PART NUMBER

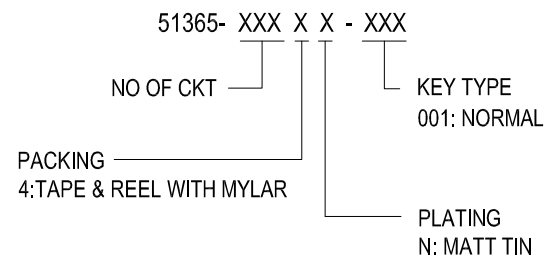

CTK	DIM A	DIM B	DIM C	DIM D
003	4.00	9.7	5.8	12.60
006	10.00	15.7	11.8	18.60
10	18.00	23.7	11.8	26.60

QUALITY SYMBOLS	DRAWN BY	DATE	<b>ACES ELECTRONICS</b>			
MAJOR Ⓜ	LuTaoTao	19/11/22				
CRITICAL Ⓢ	CHECKED BY	DATE	TITLE			
GENERAL TOLERANCES (UNLESS SPECIFIED)	XuZhiYong	19/11/22			2.0MM W/B CONN. ASSY ST.SMT	
X. ±0.5	APPROVED BY	DATE	UNITS	SIZE		
.X ±0.25	XuZhiYong	19/11/22	mm	A4	N/A	
.XX ±0.15			SCALE	SHEET NO.	REV	PART NO.
.XXX ±0.1			1:1	1 OF 1	B	51365-xxxxx-00x acs
ANGLES ±2°						