

APPLICABLE FPC
RECOMMENDED DIM.
(THICKNESS: 0.3±0.03)

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP, UL94V-0; COLOR:WHITR OR BLACK.
 - 1.2 CONTACT: COPPER ALLOY.
 - 1.3 FITTING NAIL: COPPER ALLOY.
 - 1.4 LATCH: THERMOPLASTIC, HIGH TEMP, UL94V-0; COLOR:WHITR OR BLACK.
2. FINISH:
 - 2.1 CONTACT:
 - 50 μ " NICKEL UNDERPLATING OVERALL.
 - 1:GOLD FLASH PLATED ON CONTACT AND SOLDER.
 - N:MATT TIN PLATED ON CONTACT AND SOLDER.
 - 2.2 FITTING NAIL:
 - 50 μ " MIN. NICKEL UNDERPLATING OVERALL.
 - 1:GOLD FLASH PLATED ON CONTACT AND SOLDER.
 - N:MATT TIN PLATED ON CONTACT AND SOLDER.
3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. SPEC. PLS. REFER TO PS-50501-XXXX-XXX.
5. PACKAGE PLS. REFER TO 88501-XXXX-TRP

P/N LEGEND

51595-XXX X X- XXX






NO OF CKTS

PACKAGING
0: TAPE & REEL


XXX	HOUSING MATERIAL & COLOR	ACTUATOR MATERIAL & COLOR	LOGO	HALOGEN FREE	TAPE & REEL PACKING
001	LCP&BLACK	15PIN(含)以下:PA46&WHITE 15PIN以上:LCP&WHITE	ACES	HF	88501-XXXX-TRP

PLATING

1: GOLD FLASH
N: MATT TIN

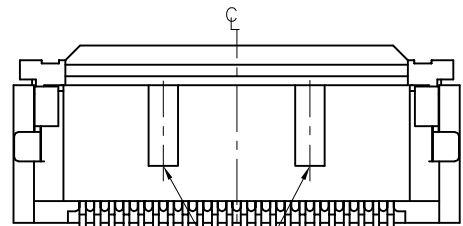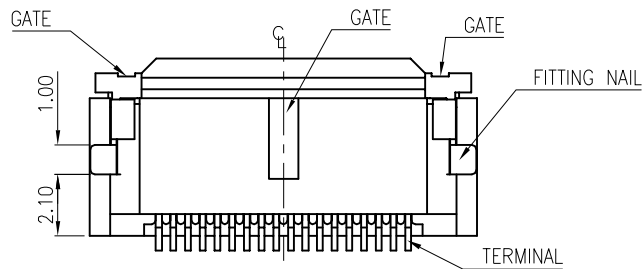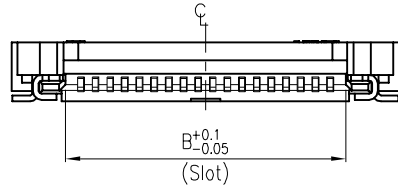

COVER OPEN STATE

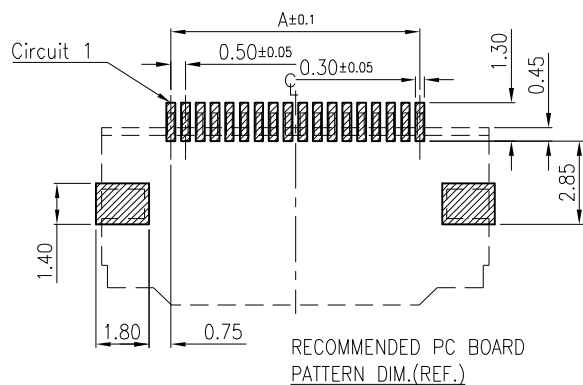

CKT	Dim A	Dim B	Dim C
12	5.50	6.56	10.2
40	19.50	20.56	24.2

一般公差 TOOLERANCES X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS INDICATE CLASSIFICATION DIMENSION MARK IS CRITICAL DIM. MARK IS MAJOR DIM.	品名 (TITLE) 0.5mm EASY ON FPC CONN. SMT R/A TYPE	製圖 (DR) 13/04/11 審核 (CHKD) SIMON	ALEX
	圖號 (DWG NO.) 51595-XXXX-XXX	核准 (APPD) JASON	
表面處理 (FINISH)	比例 (SCALE) 1:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1 尺寸 (SIZE) A4 圖號 (REV) 0