



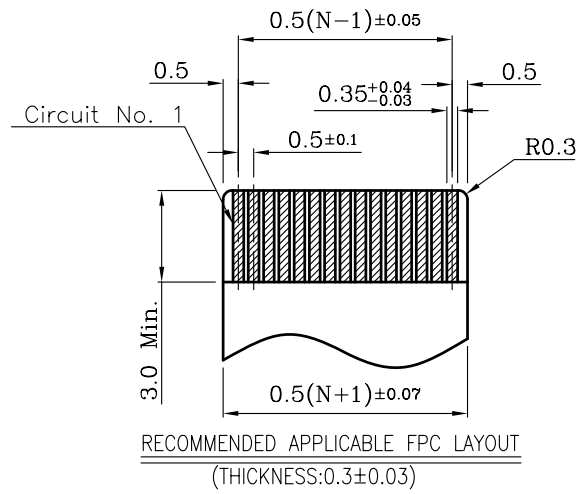

A B C D E F

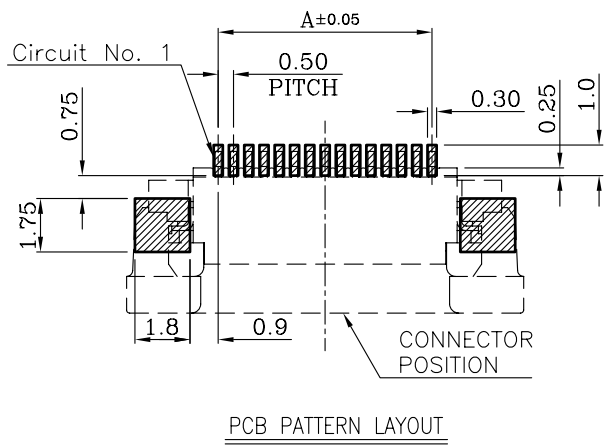




- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0;
 - CONTACT: COPPER ALLOY
 - FITTING NAIL: COPPER ALLOY
 - LATCH: THERMOPLASTIC, HIGH TEMP., UL94V-0;
 - FINISH:
 - CONTACT:
 - N:50~100u" NICKEL UNDERPLATING OVERALL.
 - 120u" MIN. MATTE TIN PLATING OVER ALL
 - 1:50~100u" NICKEL UNDERPLATING OVERALL.
 - GOLD FLASH PLATING
 - FITTING NAIL:
 - N:50u" MIN. NICKEL UNDERPLATING OVERALL.
 - 120u" MIN. MATTE TIN PLATING OVER ALL
 - 1:50u" MIN. NICKEL UNDERPLATING OVERALL.
 - GOLD FLASH PLATING
 - REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
 - SPEC. PLS. REFER TO PS-50525-XXXX-XXX
 - PACKAGE PLS. REFER TO 88296-XXOX-XX-TRP

51618-XXX X X-V01

NO OF CKT	XXX	Housing Color.	Actuator Color.
PACKING	V01	BLACK	WHITE

PLATING
0: REEL
1: TUBE
1: GOLD FLASH
N: MATTE TIN (LEAD FREE)

CKT	Dim A	Dim B	Dim C
4	1.50	2.60	6.05
5	2.00	3.10	6.55
6	2.50	3.60	7.05
7	3.00	4.10	7.55
8	3.50	4.60	8.05
9	4.00	5.10	8.55
10	4.50	5.60	9.05
11	5.00	6.10	9.55
12	5.50	6.60	10.05
13	6.00	7.10	10.55
14	6.50	7.60	11.05
15	7.00	8.10	11.55
16	7.50	8.60	12.05
17	8.00	9.10	12.55
18	8.50	9.60	13.05
19	9.00	10.10	13.55
20	9.50	10.60	14.05
21	10.00	11.10	14.55
22	10.50	11.60	15.05
23	11.00	12.10	15.55
24	11.50	12.60	16.05
25	12.00	13.10	16.55
26	12.50	13.60	17.05
27	13.00	14.10	17.55
28	13.50	14.60	18.05
29	14.00	15.10	18.55
30	14.50	15.60	19.05

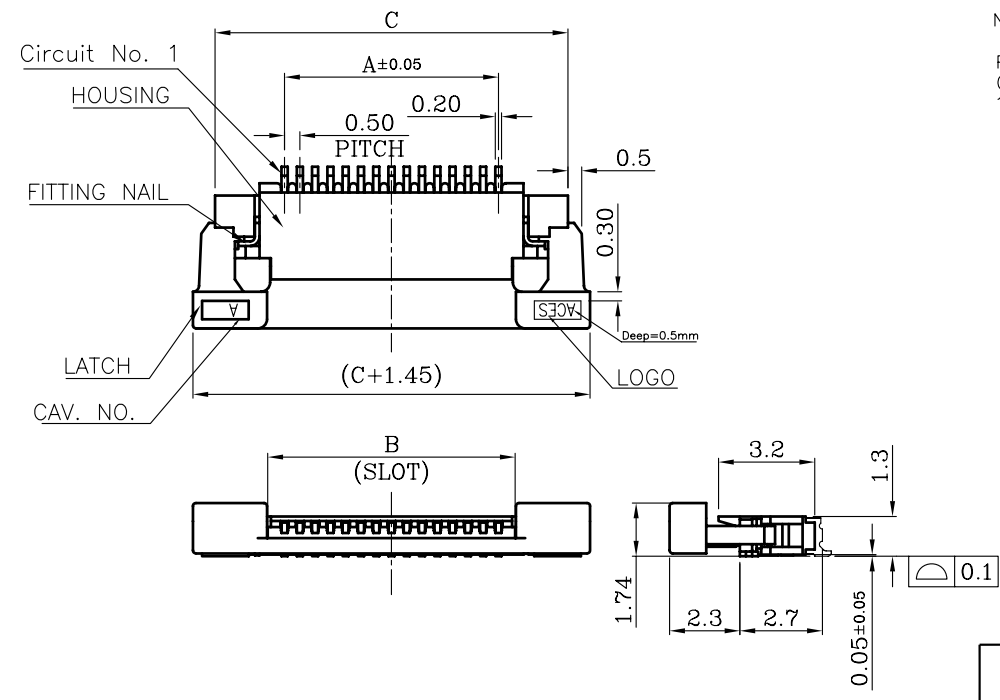

一般公差 TOLERANCES X. ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS ① ② INDICATE CLASSIFICATION DIMENSION	品名 (TITLE) 0.5mm ZIF FPC CONN. SMT R/A TOP CONTACT	製圖 (DR) '16/12/15 審核 (CHKD)	COCOYU BRAVE
① MARK IS CRITICAL DIM. ② MARK IS MAJOR DIM.	圖號 (DWG NO.) 51618-XXXX-V01 (QUANTA)	核准 (APPD)	FRANK
表面處理 (FINISH)	比例 (SCALE) 1:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1 SIZE A4 REV B

A B C D E F