
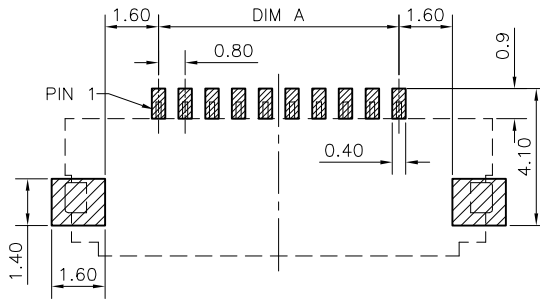



RECOMMENDED FPC/FFC DIMENSIONS
GENERAL TOLERANCE ±0.05

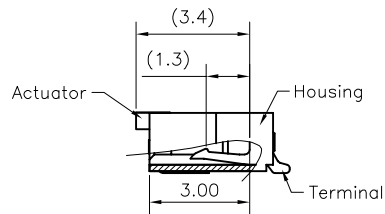

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

NOTES:

- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP; UL94V-0.
 - ACTUATOR: THERMOPLASTIC, HIGH TEMP; UL94V-0.
 - CONTACT: COPPER ALLOY
 - FITTING NAIL: COPPER ALLOY
- FINISH:
 - CONTACT:
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - 1:GOLD FLASH ON CONTACT & SOLDER AREA .
 - FITTING NAIL:
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - 80u" MIN MATT TIN PLATING ON SOLDER TAILS(LEAD FREE).
- REFLOW SOLDER CAPABLE TO 260°C
PER ACES SPEC.
- SPEC. PLS. REFER TO PS-51551-xxxx-xxx
- PACKAGE PLS. REFER TO 51551-xxxx-xx-TRP
- ACCORDING TO J-STD-020d.1, THIS SERIES PRODUCTS ARE LISTED IN LEVEL 3
- PART NUMBER

51661-XXX X X-XXX	HOUSING MATERIAL&COLOR	ACTUATOR MATERIAL&COLOR	HALOGEN FREE
NO OF CKT	001 HALOGEN FREE PLASTIC & NATURAL	HALOGEN FREE PLASTIC & BLACK	HF
PACKING	PLATING		
0: TAPE & REEL	1: GOLD FLASH		
4: TAPE & REEL WITH MYLAR			

CKT	DIMA	DIMB	DIMC	DIMD
036	28.0	29.67	31.3	33.6

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 .XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS ① ② INDICATE CLASSIFICATION DIMENSION ① MARK IS CRITICAL DIM. ② MARK IS MAJOR DIM.	品名 (TITLE) 0.8 PITCH EASY ON FPC Conn. H=1.8mm TYPE	製圖 (DR) 21/08/19 ZHUWE	審核 (CHKD) BRAVE
表面處理 (FINISH)	圖號 (DWG No.) 51661-XXXXX-XXX	核准 (APPD) BRAVE	核對 (APPD) BRAVE
比例 (SCALE) 8:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1	尺寸 (SIZE) A4