

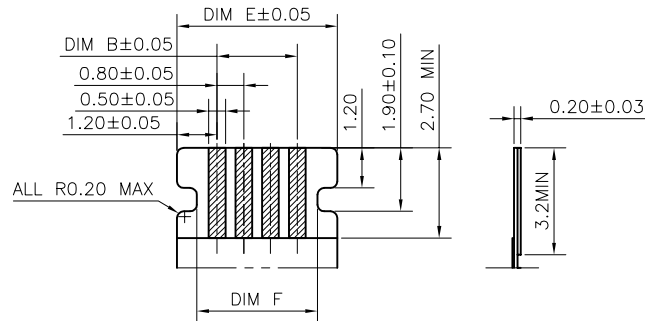




RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

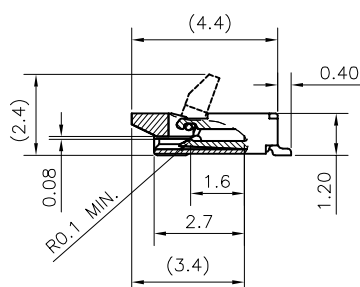

RECOMMENDED FPC DIMENSIONS
GENERAL TOLERANCE ±0.05



- NOTES:
- MATERIAL:
 - HOUSING: HALOGEN FREE THERMOPLASTIC, HIGH TEMP, UL94V-0
 - ACTUATOR: HALOGEN FREE THERMOPLASTIC, HIGH TEMP, UL94V-0
 - CONTACT: COPPER ALLOY
 - FITTING NAIL: COPPER ALLOY
 - FINISH:
 - CONTACT AREA:
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - 1: GOLD FLASH (0.5u" MIN) PLATING.
 - A: 3u" MIN. GOLD PLATING.
 - SOLDER AREA:
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - 1: GOLD FLASH (0.5u" MIN) PLATING.
 - A: GOLD FLASH (0.5u" MIN) PLATING.
 - FITTING NAIL:
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - 100u" MIN. MATT TIN PLATING.
 - REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
 - SPEC. PLS. REFER TO PS-51698-XXXX-XXX
 - PACKAGE PLS. REFER TO 51698-XXXX-XX-TRP
 - PART NUMBER

51698-XXX X X-XXX

NO OF CKT	XXX	HOUSING COLOR	ACTUATOR COLOR	PACKAGE	HALOGEN FREE
PACKING	001	BLACK	NATURAL	51698-xxxx-xx-TRP	HF

0: TAPE & REEL

PLATING
1: GOLD FLASH (0.5u" MIN) PLATING
A: 3u" MIN. GOLD PLATING ON CONTACT AREA

CKT	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
30	27.20	23.20	25.65	26.37	25.60	24.41

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 .XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS INDICATE CLASSIFICATION DIMENSION	品名 (TITLE) FPC 0.8 PITCH EASY ON TYPE H=1.2mm	製圖 (DR) '20/07/02	ZHUWEI 5
MARK IS CRITICAL DIM. MARK IS MAJOR DIM.	圖號 (DWG No.) 51698-XXXX-XXX	審核 (CHKD) BRAVE	核准 (APPD) BRAVE
表面處理 (FINISH)	比例 (SCALE) 3:1	單位 (UNITS) mm	
		張數 (SHEET) 1 OF 1	尺寸 (SIZE) A4
			REV B