


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

- NOTES:
1. MATERIAL: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 NUT: COPPER ALLOY
 2. FINISH:
 - 2.1 CONTACT: B:GOLD FLASH PLATING(5u") ON CONTACT AREA, AND 1u" GOLD PLATING ON SOLDER TAIL AREA, 50~100u" NICKEL UNDERPLATING OVERALL.
 3. REFLOW SOLDER CAPABLE TO 260° C
 4. WAVE SOLDER CAPABLE TO 260° C
 5. PER ACES SPEC.
 5. SPEC. PLS. REFER TO PS-51970-xxxxx
 6. PACKAGE PLS. REFER TO 51970-xxxxx-TRP
 7. PART NUMBER

PACKING & REEL
0-TAPE & REEL WITH COVER
7-TAPE & REEL WITH COVER

P/N LEGEND
51970-007 X X -XXX
NO OF CKT

PLATING
B: 5u" GOLD PLATING ON CONTACT AREA
001: BLACK
COLOR OF HOUSING

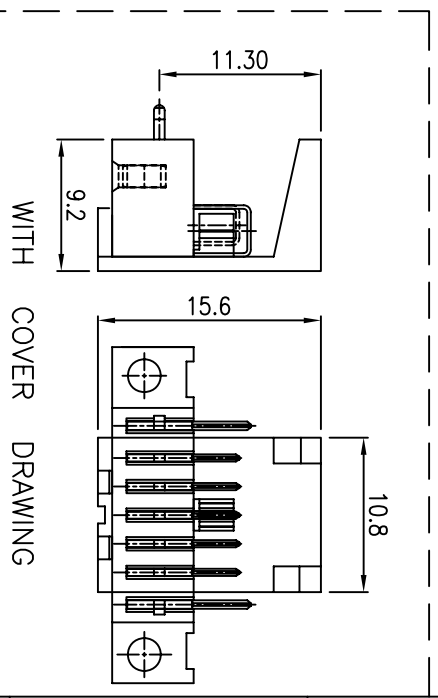

<p>一般公差 TOLERANCES X ±0.50 XX ±0.15 X ±0.25 XXX ±0.10 ANGLES ±2°</p>		<p>宏致電子股份有限公司 Aces Electronic Co.,Ltd.</p>	
<p>檢驗尺寸標示 SYMBOLS CLASSIFICATION DIMENSION R/A TYPE CONNECTOR</p>	<p>品名 (TITLE) 2.0/2.25 mm BATTERY MALE 1/H</p>	<p>圖號 (DRG.NO) 51970-007XX-XXX</p>	<p>製圖 (DR) 09/12/18</p>
<p>MARK IS CRITICAL DIM. MARK IS MAJOR DIM.</p>	<p>比例 (SCALE) 5:1</p>	<p>單位 (UNITS) mm</p>	<p>審核 (CHKD) SAM</p>
<p>表面處理 (FINISH)</p>	<p>核對 (APPD) JASON</p>	<p>張數 (SHEET) 1 OF 1</p>	<p>SIZE A4</p>