


- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP., U194V-0; COLOR:BLACK
 - CONTACT: COPPER ALLOY


2. FINISH:

- CONTACT:
 - GOLD PLATING(MIN) ON CONTACT AREA AND 1u" GOLD PLATING ON SOLDER TAIL AREA, 50~100u" NICKEL UNDERPLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260° C
 - PER ACES SPEC.
- WAVE SOLDER CAPABLE TO 260° C
- PER ACES SPEC.
- SPEC. PLS. REFER TO PS-50972-xxxxx
- PACKAGE PLS. REFER TO 51972-xxxxx-TRP


7. PART NUMBER

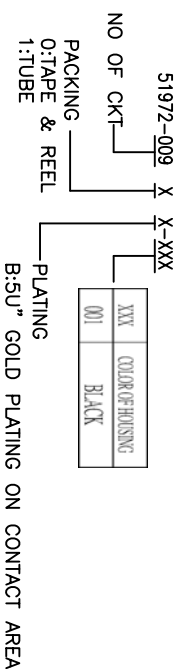

DATE CODE



RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

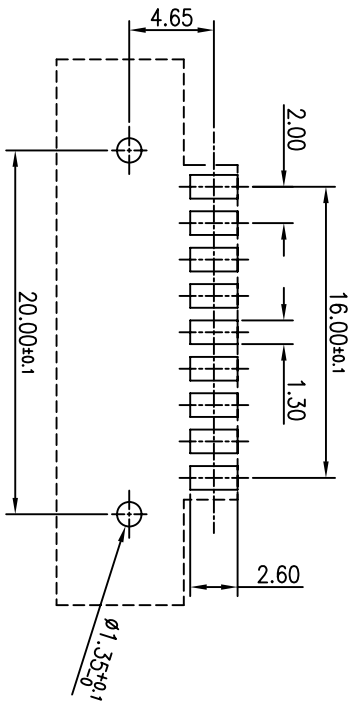

一般公差	TOOLERANCES
X ±0.50	XX ±0.15
X ±0.25	XXX ±0.10
ANGLES	±0°

宏致電子股份有限公司	Aces Electronic Co.,Ltd.
品名 (TITLE)	2.0 mm BATTERY FEMALE SMT
SYMBOLS	R/A TYPE CONNECTOR
CLASSIFICATION DIMENSION	圖號 (DRAWING NO)
MARK IS CRITICAL DIM.	51972-009XX-XXX
MARK IS MAJOR DIM.	

檢驗尺寸標示	品名 (TITLE)	製圖 (DR)	09/11/11	審核 (CHKD)	09/11/11	核准 (APPD)	JASON
SYMBOLS	2.0 mm BATTERY FEMALE SMT	圖號 (DRAWING NO)	51972-009XX-XXX	單位 (UNITS)	mm	張數 (SHEET)	OF 1
CLASSIFICATION DIMENSION	R/A TYPE CONNECTOR	比例 (SCALE)	3:1	單位 (UNITS)	mm	尺寸 (SIZE)	A4
MARK IS CRITICAL DIM.		表面處理 (FINISH)		單位 (UNITS)	mm	版次 (REV)	0