

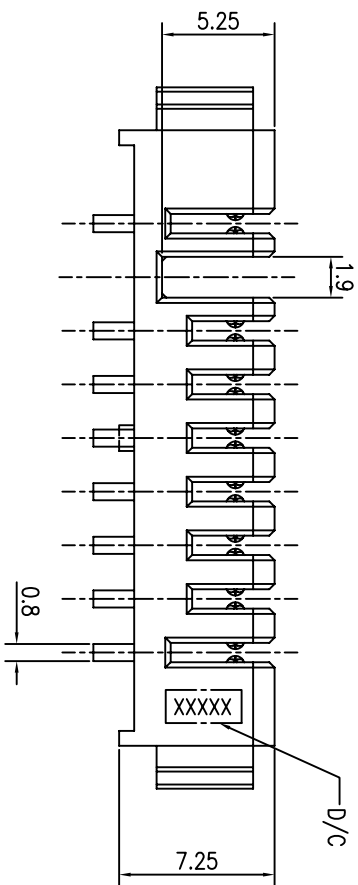


RECOMMENDED PCB LAYOUT T=0.8~1.2mm
(VIEW FROM CONNECTOR MOUNTING SIDE)

- NOTES:
- MATERIAL: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - FINISH:
 - CONTACT: COPPER ALLOY
 - CONTACT: Au 5u" PLATING ON CONTACT AREA AND 1u" GOLD FLASH PLATING ON SOLDER TAILS, 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
 - WAVE SOLDER CAPABLE TO 260°C PER ACES SPEC.
 - SPEC. PLS. REFER TO PS-51973-xxxx
 - PACKAGE PLS. REFER TO 51973-XXXX-TRP
 - PART NUMBER

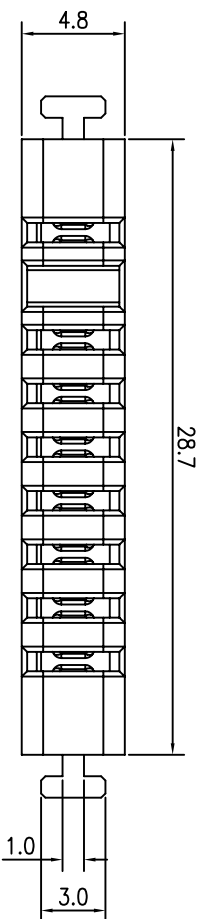

51973-008 X X-XXX
 NO OF CKT _____
 PACKING _____
 0:TAPE & REEL _____
 PLATING _____
 B:5u" Gold on contact for area
 And 1u" Gold plating on contact for area

XXX	Housin Color
001	Black

DATE CODE 編碼規則

09 A 01
 年月份碼: 09=2009年
 月份代碼: A=一月
 日碼代碼: 01=1號

一般公差
 TOLERANCES
 X ±0.5
 XX ±0.15
 XXX ±0.1
 ANGLES ±2°

檢驗尺寸標示

SYMBOLS ④ INDICATE CLASSIFICATION DIMENSION
 ④ MARK IS MAJOR DIM.

宏致電子股份有限公司
 Aces Electronic Co., Ltd.

品名 (TITLE)
 2.50mm Pitch Battery Connector Female

圖號 (DRAWING NO)
 51973-008XX-XXX

比例 (SCALE)
 1:1

單位 (UNITS)
 mm

圖例 (SYMBOL)
 1 OF 1

圖號 (DRAWING NO)
 51973-008XX-XXX

圖例 (SYMBOL)
 1 OF 1

製圖 (DR)	09/11/19	審核 (CHKD)	Sam	核准 (APPD)	Jason
比例 (SCALE)	1:1	單位 (UNITS)	mm	圖例 (SYMBOL)	1 OF 1
圖號 (DRAWING NO)	51973-008XX-XXX	品名 (TITLE)	2.50mm Pitch Battery Connector Female	一般公差	TOLERANCES

圖號 (DRAWING NO)	51973-008XX-XXX	品名 (TITLE)	2.50mm Pitch Battery Connector Female	一般公差	TOLERANCES
圖例 (SYMBOL)	1 OF 1	單位 (UNITS)	mm	比例 (SCALE)	1:1
圖號 (DRAWING NO)	51973-008XX-XXX	品名 (TITLE)	2.50mm Pitch Battery Connector Female	一般公差	TOLERANCES