
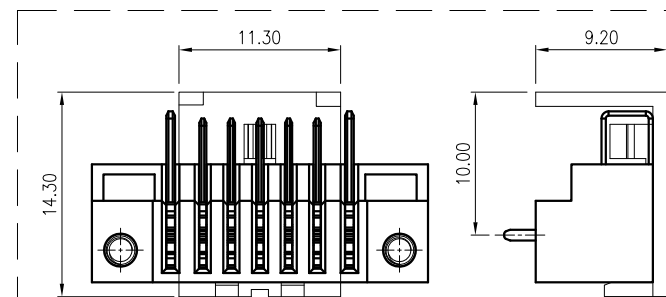


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 NUT: COPPER ALLOY
2. FINISH:
 - 2.1 CONTACT:
 - 1:1 μ " GOLD PLATED ON CONTACT AND SOLDER AREA
 - 50~100 μ " NICKEL UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. WAVE SOLDER CAPABLE TO 260°C PER ACES SPEC.
5. SPEC. PLS. REFER TO PS-51970-xxxx
6. PACKAGE PLS. REFER TO 51979-xxxx-TRP
7. PART NUMBER

P/N LEGEND

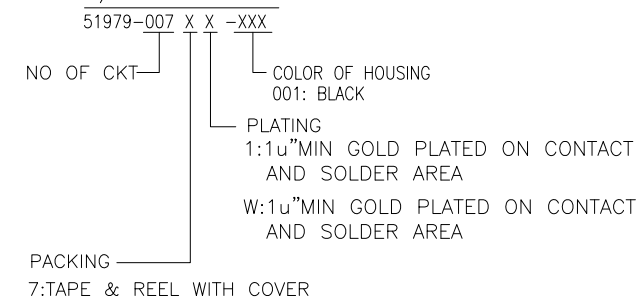

WITH COVER DRAWING

一般公差 TOLERANCES X ± 0.50 XX ± 0.15 .X ± 0.25 .XXX ± 0.10 ANGLES $\pm 2^\circ$		宏致電子股份有限公司 Aces Electronic Co.,Ltd.	
檢驗尺寸標示 SYMBOLS Ⓢ Ⓜ INDICATE CLASSIFICATION DIMENSION	品名 (TITLE) 2.0/2.25 mm BATTERY MALE T/H R/A TYPE CONNECTOR	製圖 (DR) 12/09/14 FENGXIAO	審核 (CHKD) CARL
Ⓢ MARK IS CRITICAL DIM. Ⓜ MARK IS MAJOR DIM.	圖號 (DWG.NO) 51979-007XX-XXX	核准 (APPD) JASON	
表面處理 (FINISH)	比例 (SCALE) 5:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1
			尺寸 (SIZE) A4
			版次 (REV) A