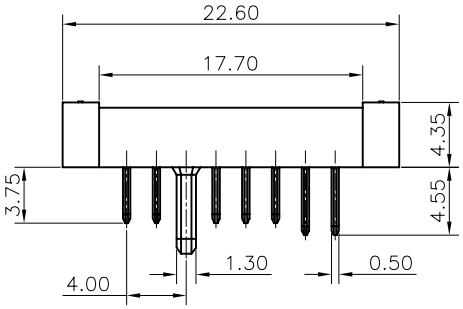

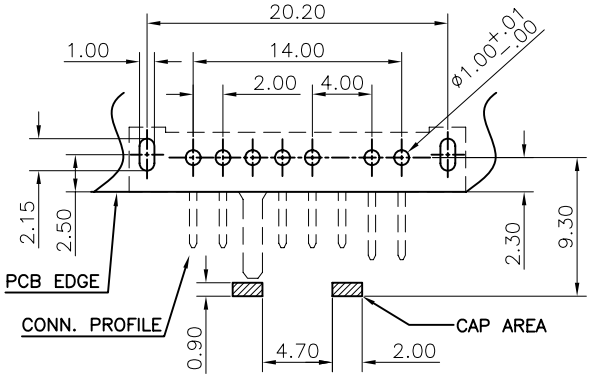

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

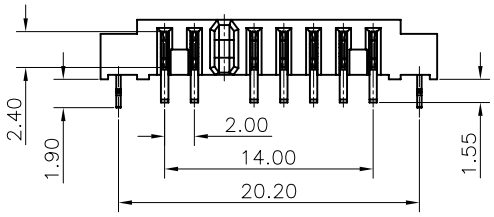



NOTES:
1. MATERIAL:
   1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
   1.2 CONTACT: COPPER ALLOY
   1.3 FITTING NAIL : COPPER ALLOY
2. FINISH:
   2.1 CONTACT:
      1: GOLD PLATED ON CONTACT AND SOLDER AREA 50~100u" MIN NICKEL UNDERPLATING OVERALL
   2.2 FITTING NAIL:
      80~150u"MIN TIN PLATING OVERALL, 50~100u" MIN NICKEL UNDERPLATING OVERALL
3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. WAVE SOLDER CAPABLE TO 260°C PER ACES SPEC.
5. SPEC. PLS. REFER TO PS-50975-xxxxx-xxx
6. PACKAGE PLS. REFER TO 51981-xxxxx-TRP

7. PART NUMBER

P/N LEGEND

51982-XXX X X -XXX

XXX	Housing Color
001	Black

NO OF CKT
007: 7PIN

PACKING
0:TAPE & REEL
7:TAPE & REEL WITH COVER

PLATING
1:GOLD PLATED ON CONTACT AND SOLDER AREA



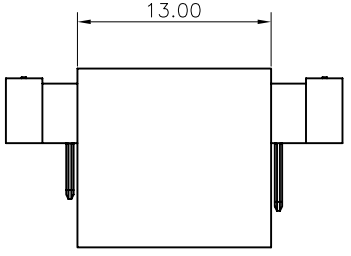

WITH COVER





一般公差 TOLERANCES X. ±0.50 .XX ±0.15 .X ±0.25 .XXX ±0.10 ANGLES ±2°	宏致電子股份有限公司 Aces Electronic Co.,Ltd.						
檢驗尺寸標示 SYMBOLS Ⓒ Ⓜ INDICATE CLASSIFICATION DIMENSION Ⓒ MARK IS CRITICAL DIM. Ⓜ MARK IS MAJOR DIM.	品名 (TITLE) 2.00mm Battery Conn. Male DIP R/A Type H=4.0					製圖 (DR) 02/24/11' Brave	
	圖號 (DWG.NO) 51982-XXXXX-XXX					審核 (CHKD) Sam	
						核准 (APPD) Jason	
表面處理 (FINISH)	比例 (SCALE) 2:1	單位 (UNITS) mm				張數 (SHEET) 1 OF 1	SIZE A4 / REV 1