




NOTES:

1. MATERIAL:
  - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR: BLACK.
  - 1.2 TERMINAL: COPPER ALLOY
2. FINISH:
  - 2.1 TERMINAL:
    - UNDERPLATING: 50u"MIN NICKEL OVERALL.
    - 1: G/F ON CONTACT AREA
    - MATTE TIN ON SOLDER AREA
3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. SPEC. PLS. REFER TO PS-52006-XXXXX-XXX
5. PART NUMBER

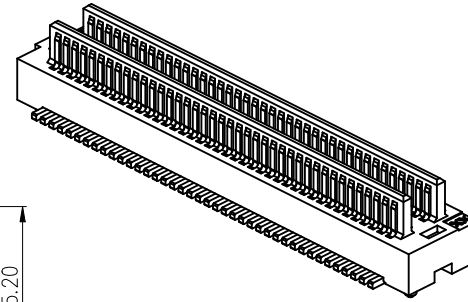

52006 - XXX X X - XXX

CKT




PACKING

4: TAPE & REEL WITH MYLAR




XXX	Housing Color	PACKAGE
001	BLACK	52006-xxxxx-xx-TRP

PLATING

1: GOLD FLASH



CKT	A	B	C	D	E
80	22.70	19.50	20.50	21.40	20.00
100	27.70	24.50	25.50	26.40	25.00

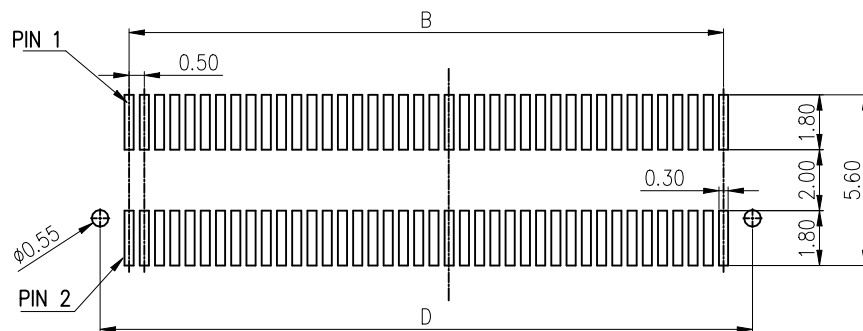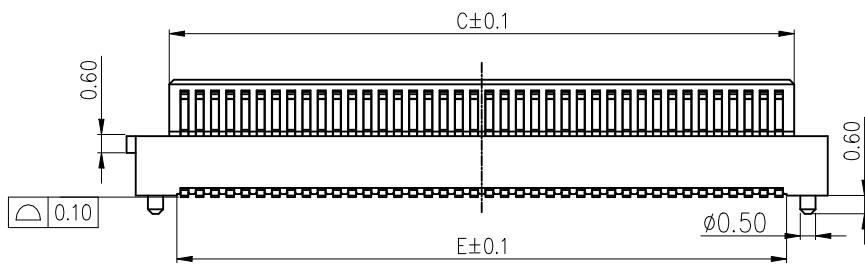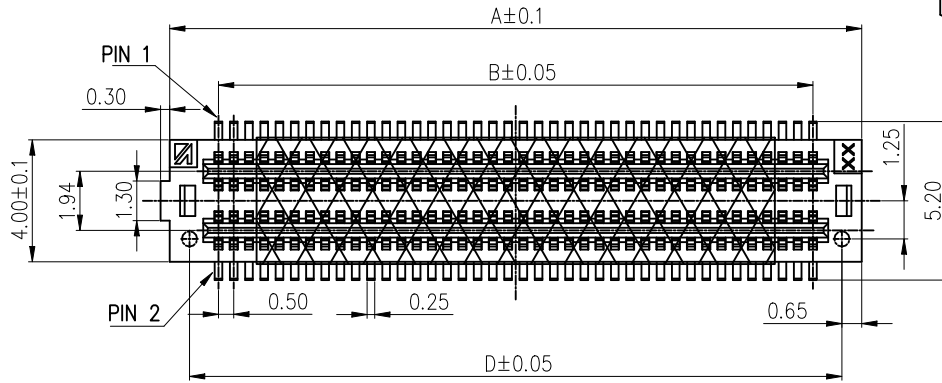

PCB LAYOUT  
GENERAL TOLORANCE ±0.05

QUALITY SYMBOLS MAJOR Ⓢ CRITICAL Ⓢ	DRAWN BY Rong, Li Ping	DATE 20/06/15			
	CHECKED BY Lu, jing quan	DATE 20/06/15			TITLE 0.5 PITCH BTB CONN. SMT D/R S/T TYPE
GENERAL TOLERANCES ( UNLESS SPECIFIED ) X. ±0.5 .X ±0.25 .XX ±0.15 .XXX ±0.1 ANGLES ±2°	APPROVED BY hsieh, fu yu	DATE 20/06/15	UNITS mm	SIZE A4	RFO NO. N/A
	SCALE 1:1	SHEET NO. 1 OF 1	REV A	DWG NO. 52006-XXXXX-XXX	