
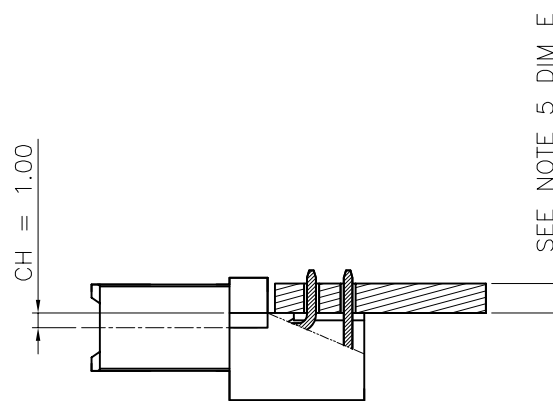
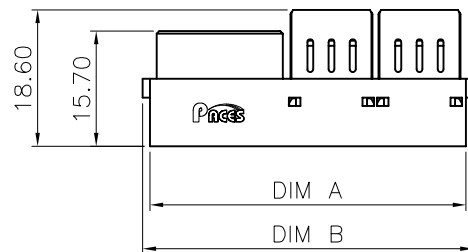
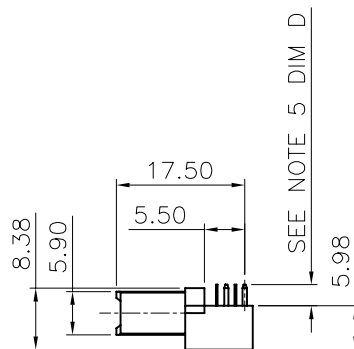


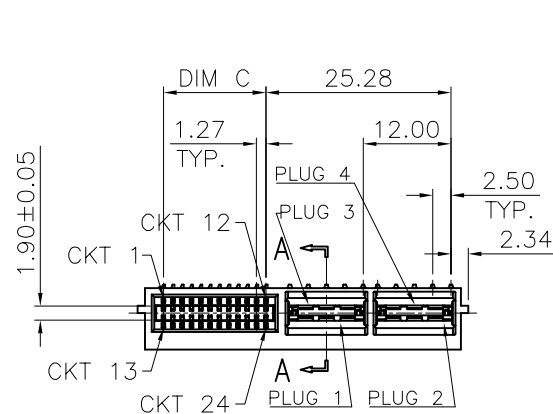

A-A SECTION
SCALE 2.0

NOTES:

1. MATERIAL:

- 1-1 HOUSING:HIGH TEMP THERMOPLASTIC,UL94V-0.
- 1-2 SHIELD:HIGH TEMP THERMOPLASTIC,UL94V-0.
- 1-3 CONTACT:COPPER ALLOY

PLATING : 50u" MIN NICKEL UNDERPLATING OVER ALL


2. REFLOW SOLDER CAPABLE TO 260°C

PER ACES SPEC.


3. SPEC. PLS. REFER TO PS-52910-XXXXX

4. PACKAGE PLS. REFER TO 52912-XXXXX-TRAY


5. PART NUMBER

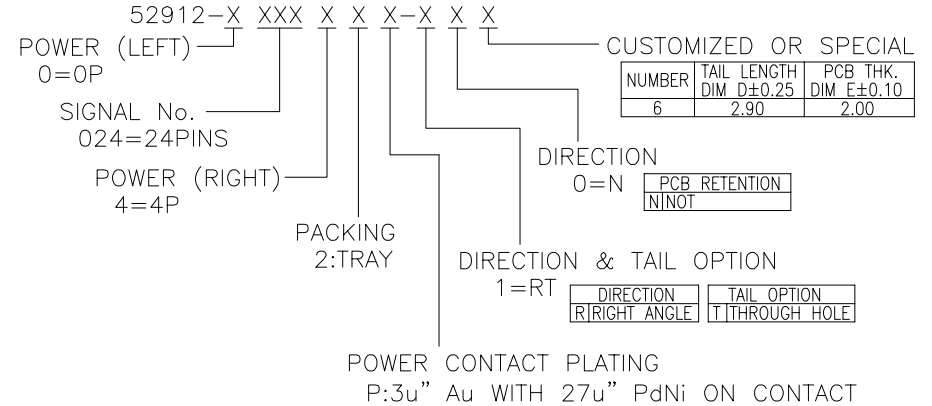


一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.			
檢驗尺寸標示 SYMBOLS   INDICATE CLASSIFICATION DIMENSION  MARK IS CRITICAL DIM.  MARK IS MAJOR DIM.	品名 (TITLE) ADVANCE POWER CARD EDGE CONN. LOW PROFILE CH=1.00 圖號 (DWG NO.) 52912-XXXXXXX-XXX		製圖 (DR) '16/06/13 JILL 審核 (CHKD) RYAN 核准 (APPD) K.HISATOMI		
	表面處理 (FINISH) _____		比例 (SCALE) 1:1	單位 (UNITS) mm	
				張數 (SHEET) 1 OF 2	

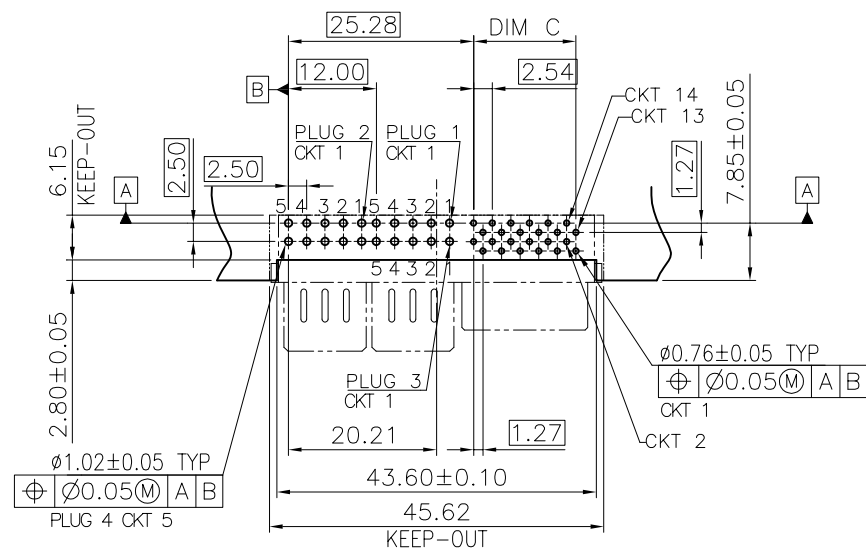

RECOMMENDED PCB LAYOUT
COMPONENT SIDE

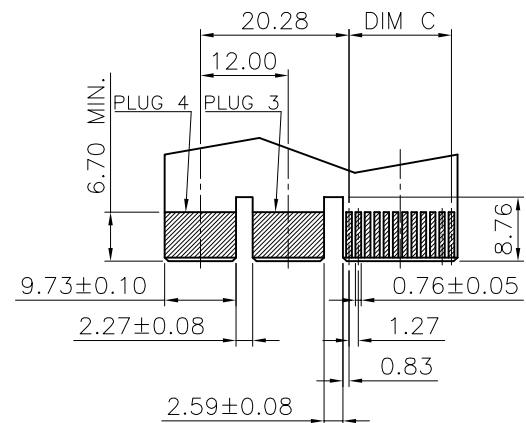

RECOMMENDED
CARD EDGE LAYOUT



NO. OF SIGNAL	PART NUMBER	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
12	52912-001242P-106	35.48	37.48	6.35	2.90	2.0
16	52912-001642P-106	38.02	40.02	8.89		
20	52912-002042P-106	40.56	42.56	11.43		
24	52912-002442P-106	43.10	45.10	13.97		
28	52912-002842P-106	45.64	47.64	16.51		
32	52912-003242P-106	48.18	50.18	19.05		
36	52912-003642P-106	50.72	52.72	21.59		
40	52912-004042P-106	53.26	55.26	24.13		

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.			
檢驗尺寸標示 SYMBOLS   INDICATE CLASSIFICATION DIMENSION  MARK IS CRITICAL DIM.  MARK IS MAJOR DIM.		品名 (TITLE) ADVANCE POWER CARD EDGE CONN. LOW PROFILE CH=1.00 圖號 (DWG NO.) 52912-XXXXXXX-XXX		製圖 (DR) '16/06/13 JILL 審核 (CHKD) RYAN 核准 (APPD) K.HISATOMI	
		表面處理 (FINISH) _____		比例 (SCALE) 1:1	
		單位 (UNITS) mm			
				張數 (SHEET) 2 OF 2	SIZE A4
				REV B	