

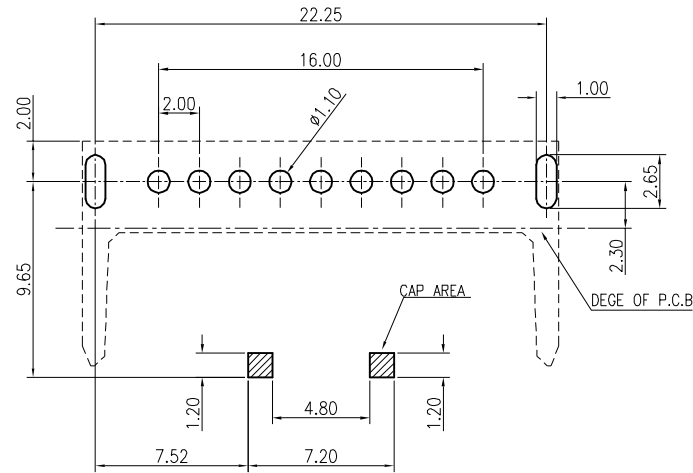
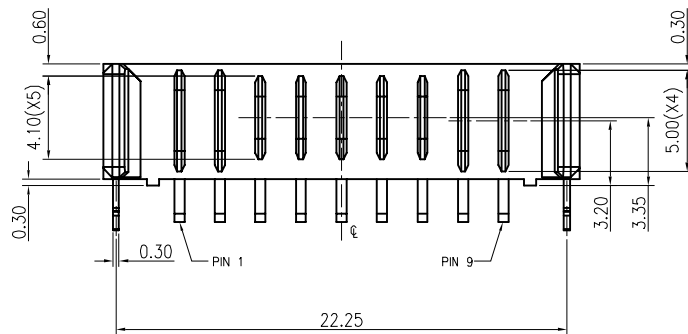


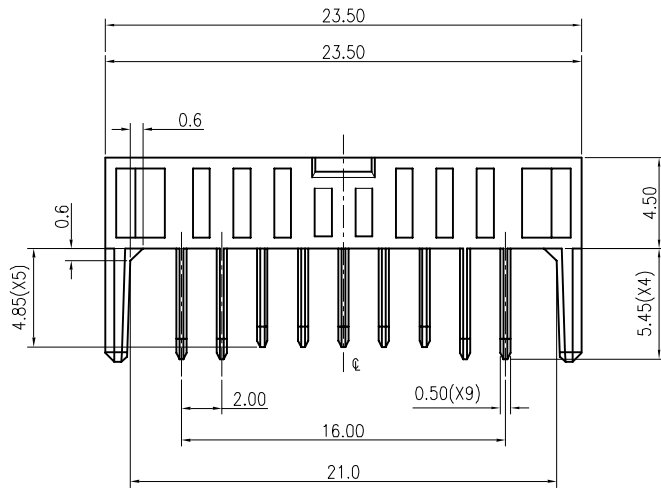

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

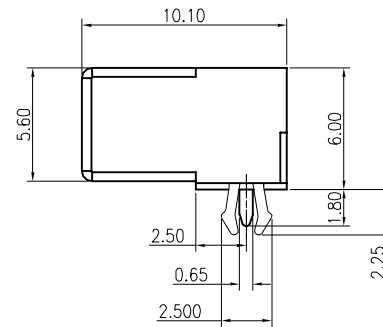

NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0.
- 1.2 CONTACT: COPPER ALLOY.
- 1.3 HOOK: COPPER ALLOY.

2. FINISH:

2.1 CONTACT:

GOLD FLASH ON CONTACT AND SOLDER.
50~100u" NICKEL UNDERPLATING OVERALL.

2.2 HOOK:

50~100u" NICKEL UNDER PLATING OVER ALL
100u" MIN. MATT TIN PLATING OVER ALL

3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.

4. SPEC. PLS REFER TO PS-53007-XXXX-XXX

5. PACKAGE PLS REFER TO 53007-XXXX-XX-TRP


6. PART NUMBER

53007-XXX X X-XXX



CKTS	XXX	Housing Color
	001	Black

PACKING PLATING

0: TAPE & REEL
7: TAPE & REEL WITH COVER
1: GOLD FLASH (LEAD FREE)



WITH COVER
1:2



一般公差 TOLERANCES X. ± 0.5 XX ± 0.15 X ± 0.25 XXX ± 0.1 ANGLES $\pm 2^\circ$		宏致電子股份有限公司 Aces Electronics Co., Ltd.	
檢驗尺寸標示 SYMBOLS $\odot$ $\ominus$ INDICATE CLASSIFICATION DIMENSION		品名 (TITLE) 2.00mm Battery Conn. Male DIP R/A Type H=6.00	製圖 (DR) 13/02/22 Alex
$\odot$ MARK IS CRITICAL DIM. $\ominus$ MARK IS MAJOR DIM.		圖號 (DWG NO.) 53007-XXXX-XXX	審核 (CHKD) Simon
表面處理 (FINISH)		比例 (SCALE) 1:1	核准 (APPD) JASON
		單位 (UNITS) mm	張數 (SHEET) 1 OF 1
			SIZE A4
			REV B