
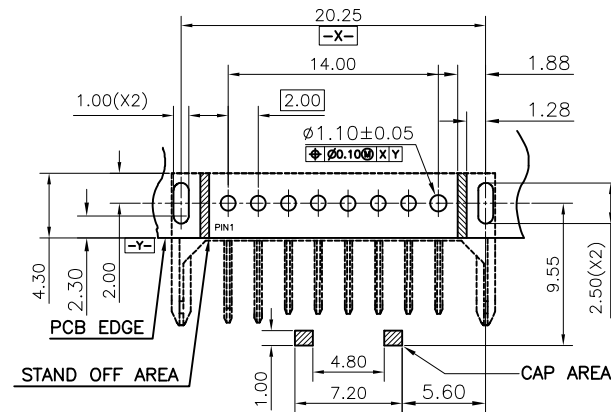



P/N LEGEND
 53017-X X X X X-XXX
 NO OF CKT
 008: 8 PIN
 PACKING
 7: TAPE&REEL WITH COVER
 0: TAPE&REEL
 8:TUBE WITH COVER

XXX	HOUSING COLOR
001	BLACK



PLATING
 1:GOLD FLASH

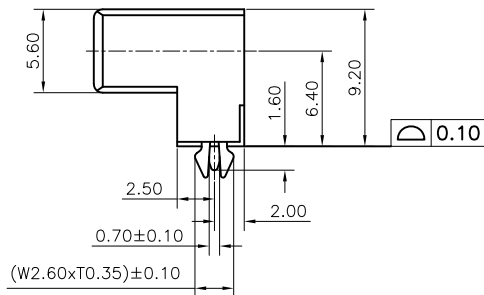

RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ±0.05



WITH COVER



NOTES:

- MATERIAL:**
 - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - CONTACT: COPPER ALLOY
 - FITTING NAIL : COPPER ALLOY
- FINISH:**
 - CONTACT:
 - GOLD FLASH
 - 50~100u" NICKEL UNDERPLATING OVERALL
 - FITTING NAIL:
 - 80~150u" TIN PLATING OVERALL,
 - 50~100u" NICKEL UNDERPLATING OVERALL
- REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
- SPEC.PLS REFER TO PS-50975-XXXXX-XXX
- PACKAGE PLS REFER TO 53017-XXXXX-TRP

一般公差
TOLERANCES
 X ±0.50 .XX ±0.15
 X ±0.25 .XXX ±0.10
 ANGLES ±2°

檢驗尺寸標示
SYMBOLS Ⓢ Ⓣ INDICATE
 CLASSIFICATION DIMENSION

Ⓢ MARK IS CRITICAL DIM.
 Ⓣ MARK IS MAJOR DIM.

表面處理 (FINISH)

宏致電子股份有限公司
 Aces Electronic Co.,Ltd.

品名 (TITLE)
 2.00mm Battery Conn.
 Male DIP R/A Type H=9.20

圖號 (DWG.NO)
 53017-XXXXX-XXX

比例 (SCALE) 單位 (UNITS)
 1:1 mm

製圖 (DR) WENDE
 12/04/19
 審核 (CHKD) CARL

核准 (APPD) JASON

張數 (SHEET) 1 OF 1
 SIZE A4
 REV 0