


- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0.
 - CONTACT: COPPER ALLOY.
 - HOOK: COPPER ALLOY.
 - SCREW: COPPER ALLOY.
 - FINISH:
 - CONTACT & SOLDER:
 - GOLD FLASH ON CONTACT AND SOLDER.
 - 50~100u" NICKEL UNDERPLATING OVERALL.
 - HOOK:
 - 50~100u" NICKEL UNDER PLATING OVER ALL
 - 80~120u" MATT TIN PLATING OVER ALL
 - REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
 - SPEC.PLS REFER TO PS-53007-XXXXX-XXX
 - PACKAGE PLS REFER TO 53050-XXXXX-XX-TRP
 - PART NUMBER


53050-XXX X X-XXX

NO. OF CKTS	XXX	Housing Color
009: 9PIN	001	Black



- PACKING
- TAPE & REEL
 - TAPE & REEL WITH COVER
- PLATING
- GOLD FLASH ON CONTACT AND SOLDER TAIL AREA

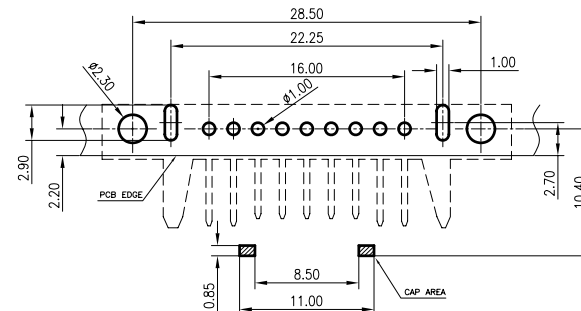

RECOMMENDED P.C.B. LAYOUT
TOLERANCE ±0.05 mm

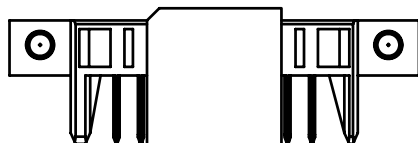

WITH COVER

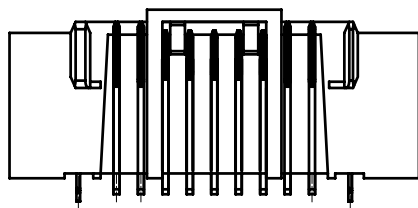

一般公差 TOLERANCES X. ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.		
檢驗尺寸標示 SYMBOLS ① ② INDICATE CLASSIFICATION DIMENSION	品名 (TITLE) 2.00mm Battery Conn. Male DIP R/A Type H=12.80	製圖 (DR) FENGXIAO '13/05/29	審核 (CHKD) CARL	
① MARK IS CRITICAL DIM. ② MARK IS MAJOR DIM.	圖號 (DWG NO.) 53050-XXXXX-XXX	核准 (APPD) Jason		
表面處理 (FINISH)	比例 (SCALE) 1:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1	圖號 (REV) A4 0