

RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE ±0.05)


NOTES:

1. MATERIAL:
 - 1.1 HOUSING: HALOGEN FREE PLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 BOARD LOCK: COPPER ALLOY
2. FINISH:
 - 2.1 CONTACT:
 - 50u"MIN. NICKEL PLATING OVERALL
 - 1:1u" GOLD PLATING ON CONTACT AREA
 - 2.2 BOARD LOCK:
 - N: 50u" MIN. NICKEL UNDER PLATING OVERALL.
 - 80u" MIN. MATT TIN ON PLATED AREA.
3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. SPEC. PLS. REFER TO PS-50975-XXXX-XXX
5. PACKAGE PLS. REFER TO 54965-XXXX-XX-TRP
6. PART NUMBER



NO. OF CKT	NO.	HOUSING COLOR	Halogen Free
007 : 7PIN	001	BLACK	Y

PLATING
1:GOLD FLASH ON CONTACT

PACKING
7:TAPE & REEL WITH COVER

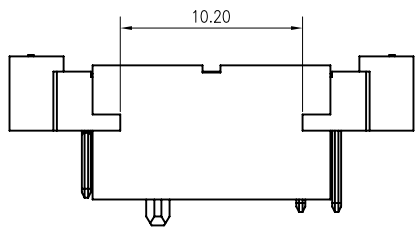

WITH COVER

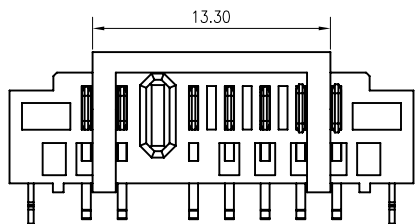

一般公差 TOLERANCES X ±0.5 XX ±0.15 X ±0.25 XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS INDICATE CLASSIFICATION DIMENSION MARK IS CRITICAL DIM. MARK IS MAJOR DIM.	品名 (TITLE) 2.0mmPITCH BATTERY CONN MALE T/H R/A H=6.7mm 圖號 (DWG.NO) 54965-XXXXX-XXX	製圖 (DR) 13/10/17 審核 (CHKD) DAVID	XUBIN DAVID
表面處理 (FINISH)	比例 (SCALE) 單位 (UNITS) 2:1 mm	核准 (APPD) JERRY	張數 (SHEET) 1 OF 1
			SIZE REV A4 0