

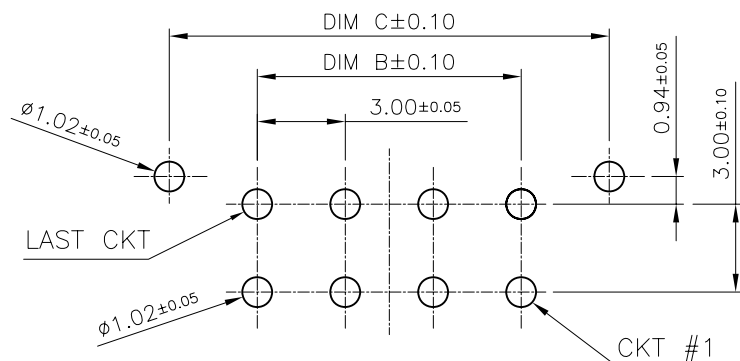
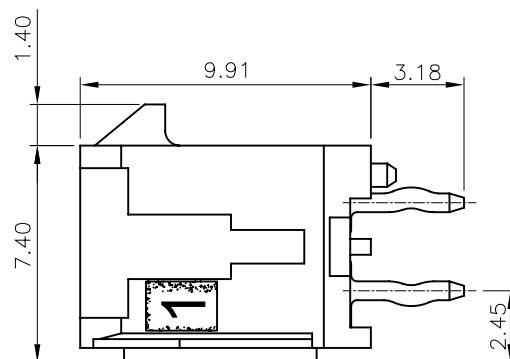


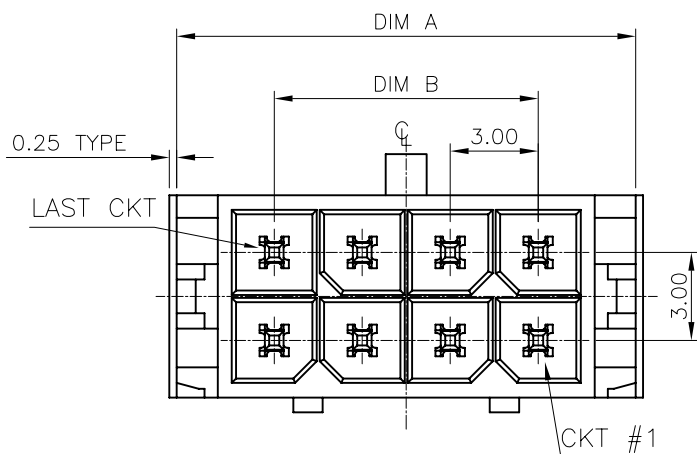

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

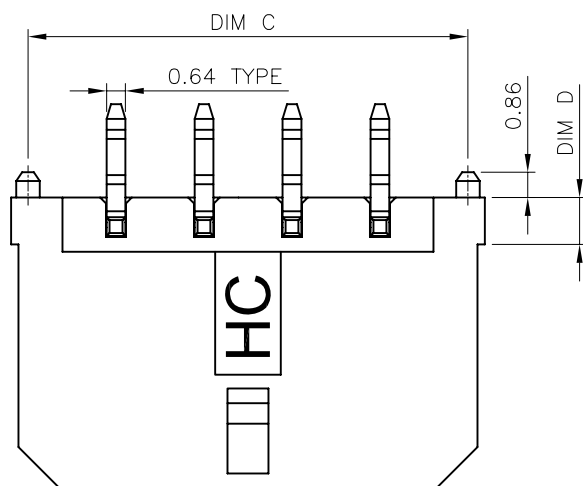

NOTES:

- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - CONTACT: HIGH CONDUCTIVITY COPPER ALLOY
- FINISH:
 - CONTACT:
 - 50u" MIN NICKEL UNDERPLATING OVERALL.
 - N: 60U" MIN MATTE TIN OVERALL.
- REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
- SPEC. PLS. REFER TO PS-57980-XXXXX-XXX
- PACKAGE PLS. REFER TO 57959-XXXXX-04-TRP
- PART NUMBER

56967-XXX X X-V01

NO OF CKT

V01:WITH KINK

PACKING
O:TAPE & REEL


PLATING
N: MATTE TIN

CKT	DIM A	DIM B	DIM C	DIM D
2	6.65	NA	6.00	6.74
4	9.65	3.00	9.00	
6	12.65	6.00	12.00	
8	15.65	9.00	15.00	1.60
10	18.65	12.00	18.00	
12	21.65	15.00	21.00	
14	24.65	18.00	24.00	
16	27.65	21.00	27.00	
18	30.65	24.00	30.00	
20	33.65	27.00	33.00	
22	36.65	30.00	36.00	
24	39.65	33.00	39.00	




QUALITY SYMBOLS		DRAWN BY	DATE
MAJOR		Liang,Lin Ji	19/04/10
CRITICAL		CHECKED BY	DATE
GENERAL TOLERANCES (UNLESS SPECIFIED)		Lu,Jing Quan	19/04/10
X. ± 0.5		APPROVED BY	DATE
.X ± 0.36		hsieh,fu yu	19/04/10
.XX ± 0.25		UNITS	SIZE
.XXX ± 0.1		mm	A4
ANGLES $\pm 2^\circ$		SCALE	REV
		4:1	A
		SHEET NO.	RFQ NO.
		1 OF 3	NA
		DWG NO.	56967-XXXXX-VXX

ACES ELECTRONICS

3.0mm PITCH HEADER CONN.
T/H D/R S/T TYPE

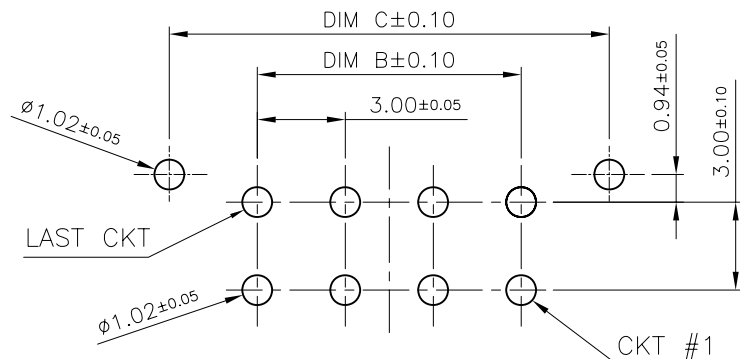

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

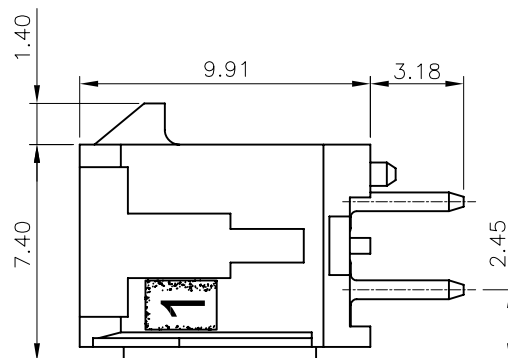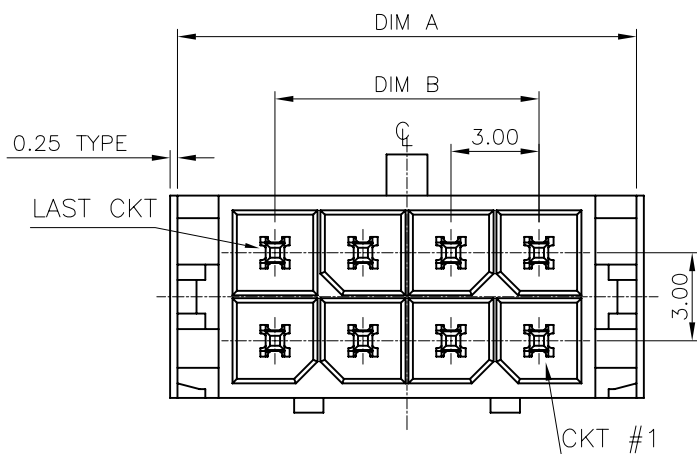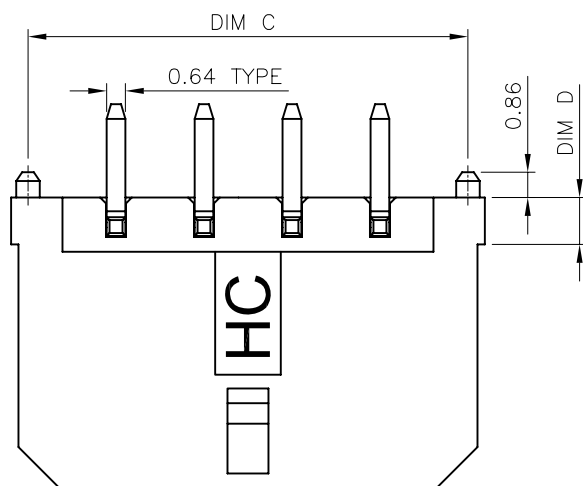

NOTES:

- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR: BLACK.
 - CONTACT: HIGH CONDUCTIVITY COPPER ALLOY
- FINISH:
 - CONTACT:
 - 50U" MIN NICKEL UNDERPLATING OVERALL.
 - N: 60U" MIN MATTE TIN OVERALL.
- REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
- SPEC. PLS. REFER TO PS-57980-XXXXX-XXX
- PACKAGE PLS. REFER TO 57959-XXXXX-04-TRP
- PART NUMBER

56967-XXX X X-V02

NO OF CKT


V02: WITHOUT KINK

PACKING
0: TAPE & REEL


PLATING
N: MATTE TIN

CKT	DIM A	DIM B	DIM C	DIM D
2	6.65	NA	6.00	6.74
4	9.65	3.00	9.00	
6	12.65	6.00	12.00	
8	15.65	9.00	15.00	1.60
10	18.65	12.00	18.00	
12	21.65	15.00	21.00	
14	24.65	18.00	24.00	
16	27.65	21.00	27.00	
18	30.65	24.00	30.00	
20	33.65	27.00	33.00	
22	36.65	30.00	36.00	
24	39.65	33.00	39.00	


QUALITY SYMBOLS MAJOR CRITICAL GENERAL TOLERANCES (UNLESS SPECIFIED) X. ± 0.5 .X ± 0.36 .XX ± 0.25 .XXX ± 0.1 ANGLES $\pm 2^\circ$	DRAWN BY Liang, Lin Ji	DATE 19/04/10	ACES ELECTRONICS	
	CHECKED BY Lu, Jing Quan	DATE 19/04/10		
	APPROVED BY hsieh, fu yu	DATE 19/04/10	TITLE 3.0mm PITCH HEADER CONN. T/H D/R S/T TYPE	
	UNITS mm		SIZE A4	RFQ NO. NA
SCALE 4:1	SHEET NO. 2 OF 3	REV A	DWG NO. 56967-XXXXX-VXX	

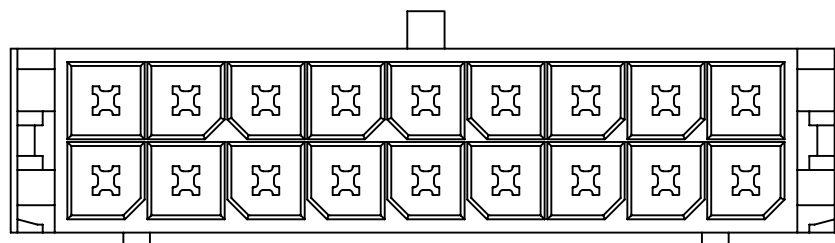


18-CKT

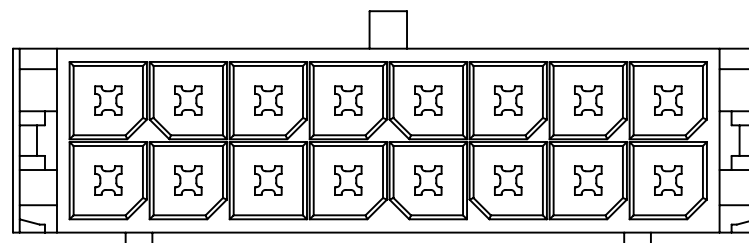


16-CKT




2-CKT

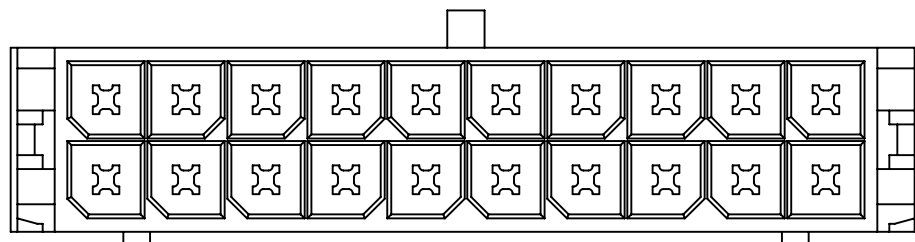


20-CKT

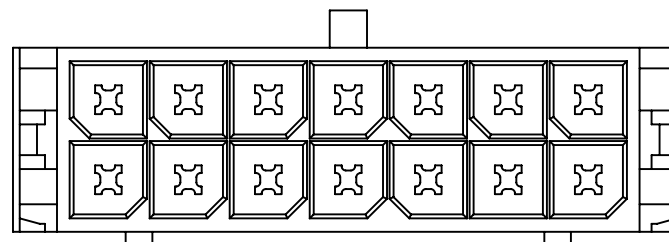


14-CKT




4-CKT

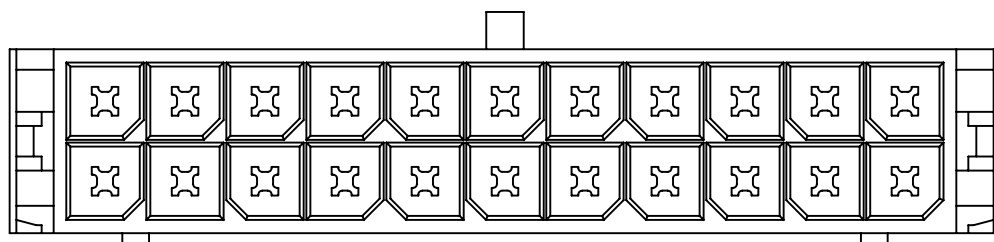


22-CKT

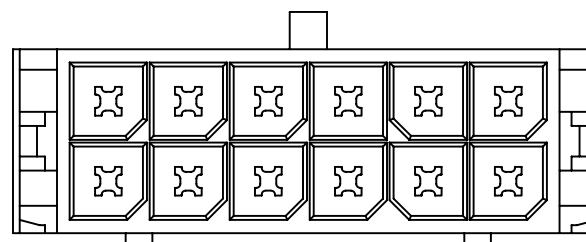


12-CKT

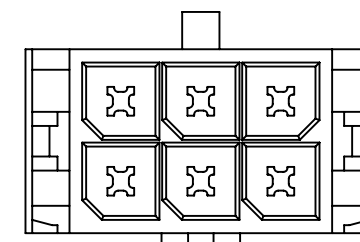


6-CKT

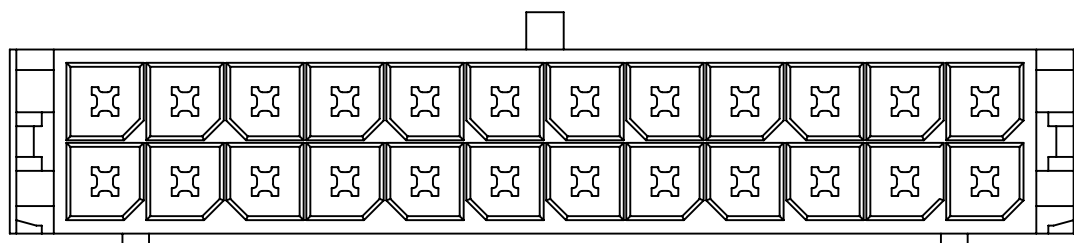

24-CKT

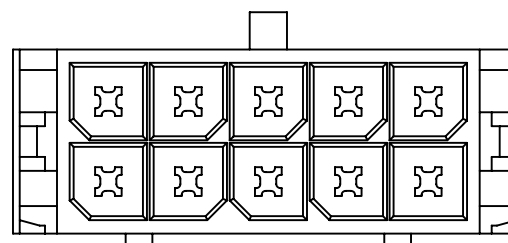

10-CKT

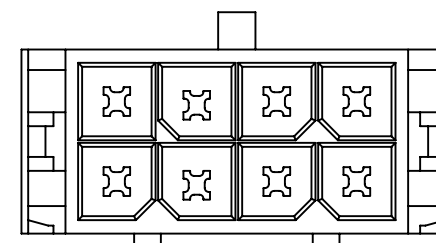

8-CKT

QUALITY SYMBOLS MAJOR  CRITICAL  GENERAL TOLERANCES (UNLESS SPECIFIED) X. ±0.5 .X ±0.36 .XX ±0.25 .XXX ±0.1 ANGLES ±2°	DRAWN BY Liang,Lin Ji		DATE 19/04/10		ACES ELECTRONICS TITLE 3.0mm PITCH HEADER CONN. T/H D/R S/T TYPE SIZE A4 REV A RFQ NO. NA DWG NO. 56967-XXXXX-VXX
	CHECKED BY Lu,Jing Quan		DATE 19/04/10		
	APPROVED BY hsieh,fu yu		DATE 19/04/10		
	UNITS mm				
SCALE 4 : 1	SHEET NO. 3 OF 3				