

LOCATION DETAIL

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - 1.2 CONTACT: HIGH CONDUCTIVITY COPPER ALLOY
 - 1.3 FITTING NAIL: COPPER ALLOY
2. FINISH:
 - 2.1 CONTACT:
 - 50u" MIN NICKEL UNDERPLATING OVERALL.
 - N: 60U" MIN MATTE TIN OVERALL..
3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. SPEC. PLS. REFER TO PS-57980-XXXXX-XXX
5. PACKAGE PLS. REFER TO 59193-XXXXX-04-TRP
6. PART NUMBER


59242-XXX X X-XXX

NO OF CKT	XXX	HOUSING COLOR	PACKING
	001	BLACK	59193-XXXXX-04-TRP
PLATING		N: MATTE TIN	


PACKING 0:TAPE&REEL

CKT	DIM A	DIM B	DIM C	DIM D
2	6.65	NA	11.20	6.74
4	9.65	3.00	14.20	
6	12.65	6.00	17.20	
8	15.65	9.00	20.20	1.60
10	18.65	12.00	23.20	
12	21.65	15.00	26.20	
14	24.65	18.00	29.20	
16	27.65	21.00	32.20	
18	30.65	24.00	35.20	
20	33.65	27.00	38.20	
22	36.65	30.00	41.20	
24	39.65	33.00	44.20	


QUALITY SYMBOLS MAJOR Ⓢ CRITICAL Ⓢ GENERAL TOLERANCES (UNLESS SPECIFIED) X: ±0.5 XX: ±0.38 .XX: ±0.25 .XXX: ±0.15 ANGLES ±2°	DRAWN BY Huang,ShunSen CHECKED BY Lu,Jing Quan APPROVED BY hsieh,tu yu	DATE 23/05/15 DATE 23/05/15 DATE 23/05/15	 ACES ELECTRONICS TITLE 3.0mm PITCH WTB HEADER CONN. SMT D/R R/A TYPE
	UNITS mm SCALE 3:1	 SIZE A4 SHEET NO. 1 OF 2	

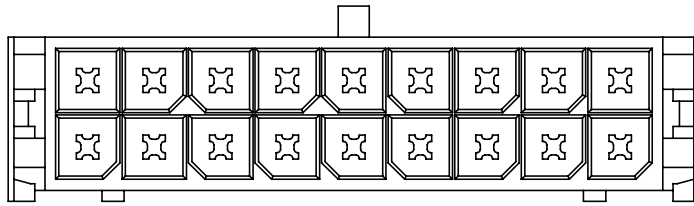


18-CKT

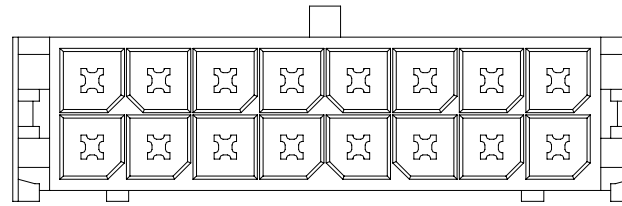


16-CKT




2-CKT

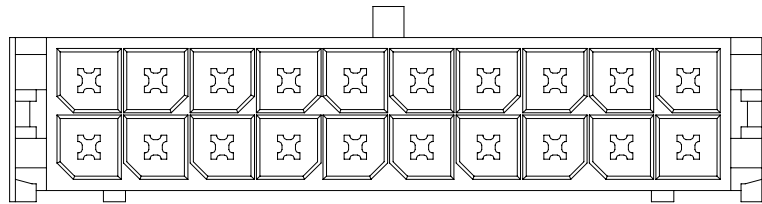


20-CKT

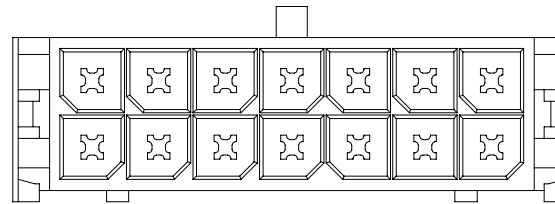


14-CKT




4-CKT

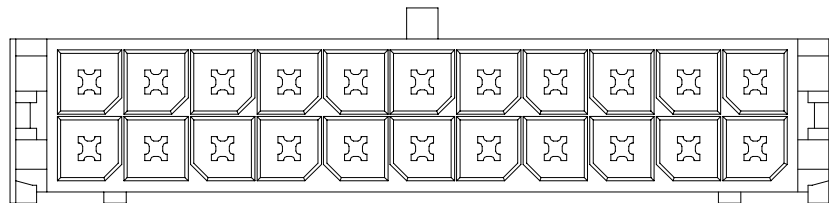


22-CKT

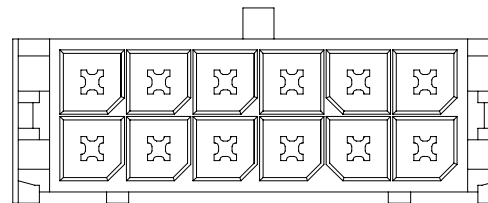


12-CKT




6-CKT

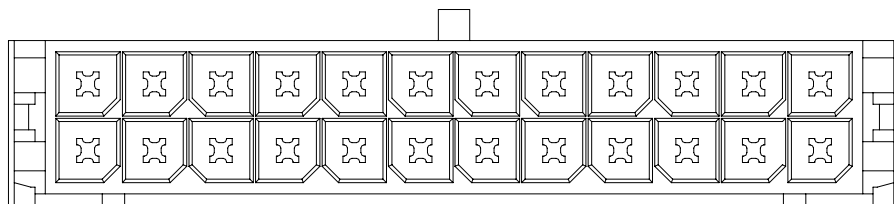

24-CKT

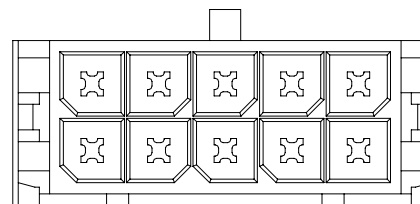

10-CKT

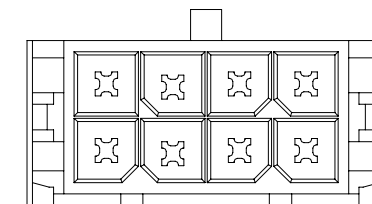

8-CKT

QUALITY SYMBOLS MAJOR Ⓢ CRITICAL Ⓢ GENERAL TOLERANCES (UNLESS SPECIFIED) X ±0.5 .X ±0.38 .XX ±0.25 .XXX ±0.15 ANGLES ±2°	DRAWN BY Huang,ShunSen	DATE 23/05/15				
	CHECKED BY Lu,Jing Quan	DATE 23/05/15		TITLE 3.0mm PITCH WTB HEADER CONN. SMT D/R R/A TYPE		
	APPROVED BY hsieh,tu yu	DATE 23/05/15	UNITS mm		SIZE A4	RFQ NO. NA
	SCALE 3 : 1	SHEET NO. 2 OF 2	REV A	DWG NO. 59242-XXXXX-XXX		