




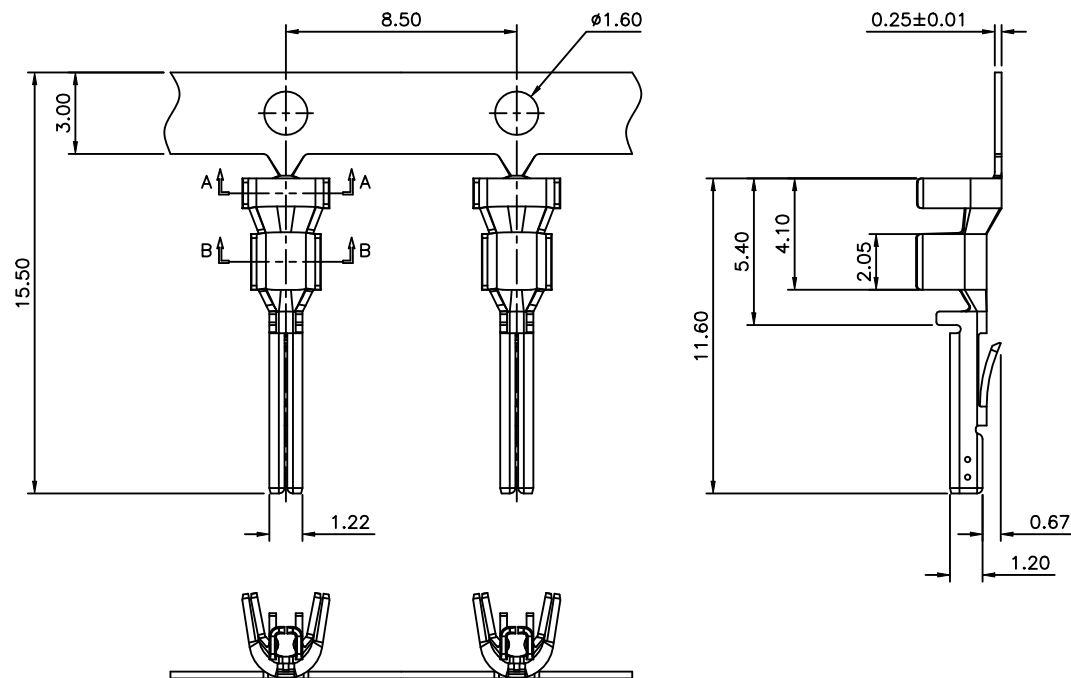

- NOTES:
1. MATERIAL: COPPER ALLOY, THICKNESS 0.25±0.01.
 2. SPEC. PLS. REFER TO PS-59942-xxxxx-xxx
 3. COMPONENT LOAD PER REEL: XXK PCS.
 4. APPLICABLE WIRE RANGE:
STANDARD: AWG#16
 5. INSULATION O.D.: Ø2.20mm (MAX.)
 6. PART NUMBER
59943-T5 X X - XXX
 7. HIGH CONDUCTIVITY COPPER
- TYPE _____ 001.
- MATERIAL _____ PLATING
N. 100u" MATTE TIN OVERALL
ALL UNDERPLATED 75u" Min.
DUCTILE NICKEL



AFTER PLATING

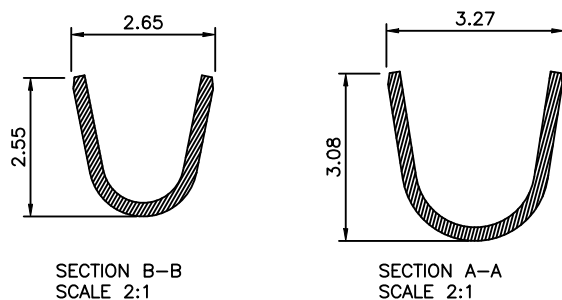

QUALITY SYMBOLS	DRAWN BY	DATE	
MAJOR 	Lai, Yi Guang	24/01/17	
CRITICAL 	CHECKED BY	DATE	TITLE
GENERAL TOLERANCES (UNLESS SPECIFIED)	Chen, Chun Yuan	24/01/17	
	APPROVED BY	DATE	
	Huang, Kuo Hua	24/01/17	
X. ±0.5	POWER HEADER		
.X ±0.25	UNITS	SIZE	RFQ NO.
.XX ±0.15	mm		N/A
.XXX ±0.1	SCALE	SHEET NO.	REV
ANGLES ±2°	4 : 1	1 OF 1	DWG NO.
			59943-T5xx-xxx