

DIM.E	CKTS
5.00mm	004
6.00mm	006~016
8.50mm	018~080

NOTES:

1.MATERIAL:

1.1 HOUSING: SEE TABLE

1.2 CONTACTS: SEE TABLE

2.FINISH:

2.1 CONTACT: SEE P/N

3.THE CONNECTOR IS RoHS COMPLIANT.





4.BURR IS 0.5mm MAX.

5.SPEC. PLS. REFER TO PS-60002-XXXXX-XXX

6.PACKAGE PLS. REFER TO 60246-XXXXX-XXX-PCK

7.P/N: 60246-XXX X X-001

CKTS ———— 001:WITH BOSS
 012~030 PINS
 PACKING ———— WITH COVER
 7: TAPE & REEL
 PLATING: 1:GOLD FLASH OVER ALL

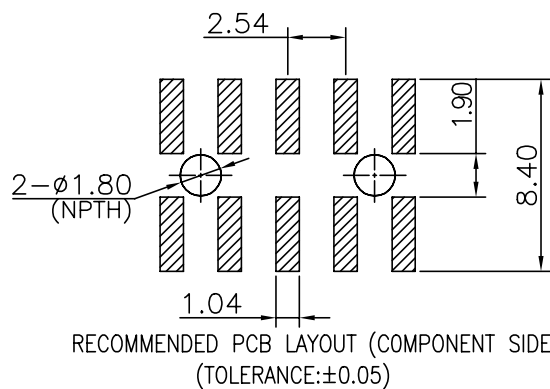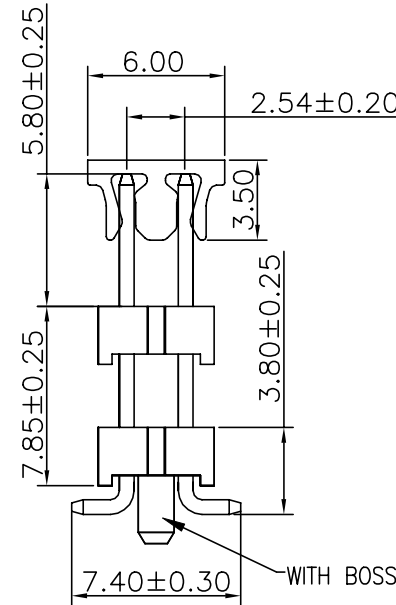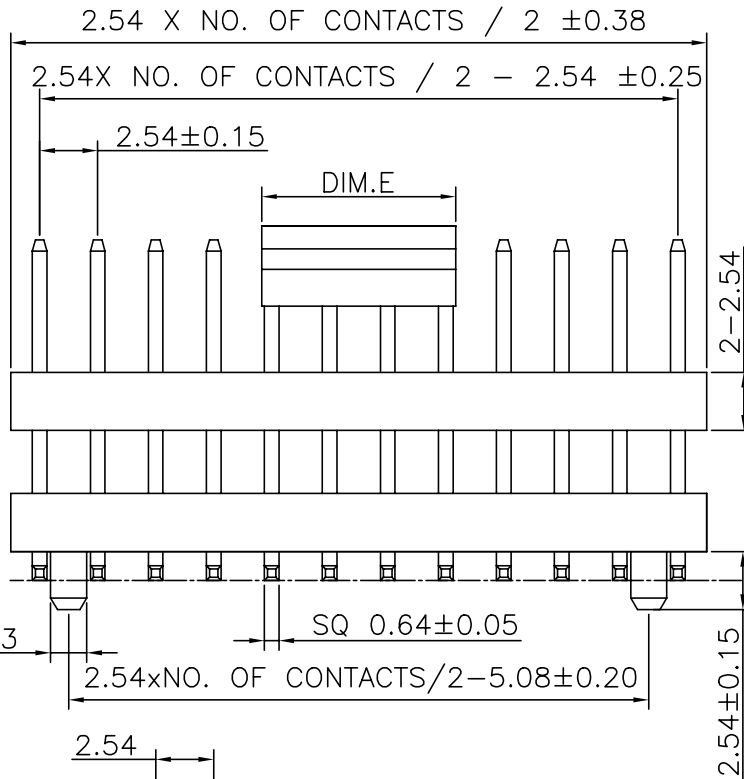

B	TERMINAL		COPPER ALLOY	SEE P/N
A	HOUSING	2	HIGH TEMP. THERMOPLASTIC	UL 94V-0, BLACK
NO	DESCRIPTION	Q'TY	MATERIAL	PLATING & COLOR
QUALITY SYMBOLS		DRAWN BY	DATE	
MAJOR		LYU JIA YING	'19/09/27	
CRITICAL		CHECKED BY	DATE	2.54mm PIN HEADER CONN. SMT D/R S/T TYPE (2BASE)
GENERAL TOLERANCES (UNLESS SPECIFIED)		TENG CHANG HO	'19/09/27	
X. ±0.5		APPROVED BY	DATE	UNITS: mm SCALE: X : X SHEET NO. 1 OF 1 SIZE: A4 REV: B RFG NO.: N/A DWG NO.: 60246-XXXXX-XXX
.XX ±0.25		KURO JUNG HSUN '19/09/27		
.XXX ±0.1				
ANGLES ±2°				
TOLERANCES: ±0.30				