

RECOMMENDED PCB LAYOUT (COMPONENT SIDE)
(TOLERANCE:±0.05)

NOTES:

1.MATERIAL:

- 1.1 HOUSING: SEE TABLE
- 1.2 CONTACTS: SEE TABLE
- 1.3 COVER: SEE TABLE

2.FINISH:


- 2.1 CONTACT: SEE P/N
- 3.THE CONNECTOR IS RoHS COMPLIANT.
- 4.BURR IS 0.5mm MAX.
- 5.SPEC. PLS. REFER TO PS-60289-XXXXX-XXX
- 6.PACKAGE PLS. REFER TO 60290-XXXXX-XXX-PCX
- 7.P/N: 60290-XXX X X-001

CKTS —
024~032 PINS

PACKING —

7: TAPE & REEL
WITH COVER

PLATING:
1:GOLD FLASH OVER ALL

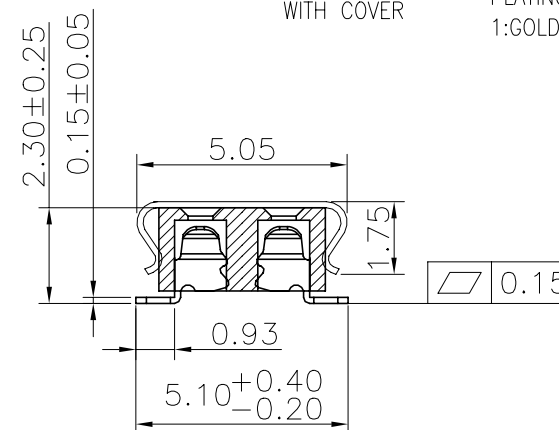

C	COVER		NY6T	UL 94V-0, BLACK
B	TERMINAL		COPPER ALLOY	SEE P/N
A	HOUSING	1	NY6T	UL 94V-0, BLACK
NO	DESCRIPTION	Q'TY	MATERIAL	PLATING & COLOR
QUALITY SYMBOLS				
MAJOR		DRAWN BY	DATE	ACES ELECTRONICS
CRITICAL		LYU JIA YING	20/10/14	
GENERAL TOLERANCES (UNLESS SPECIFIED)		CHECKED BY	DATE	
		TENG CHANG HO	20/10/14	
		APPROVED BY	DATE	TITLE 2.00mm FEMALE HEADER CONN. SMT D/R S/T TYPE
		KUO JUNG HSUN	20/10/14	
		UNITS	SIZE	
		mm	A4	
		SCALE	SHEET NO.	
		X:X	1 OF 1	
		REVISION	REV	DWG NO. 60290-XXXXX-XXX
			A	

TOLERANCES:
±0.30