



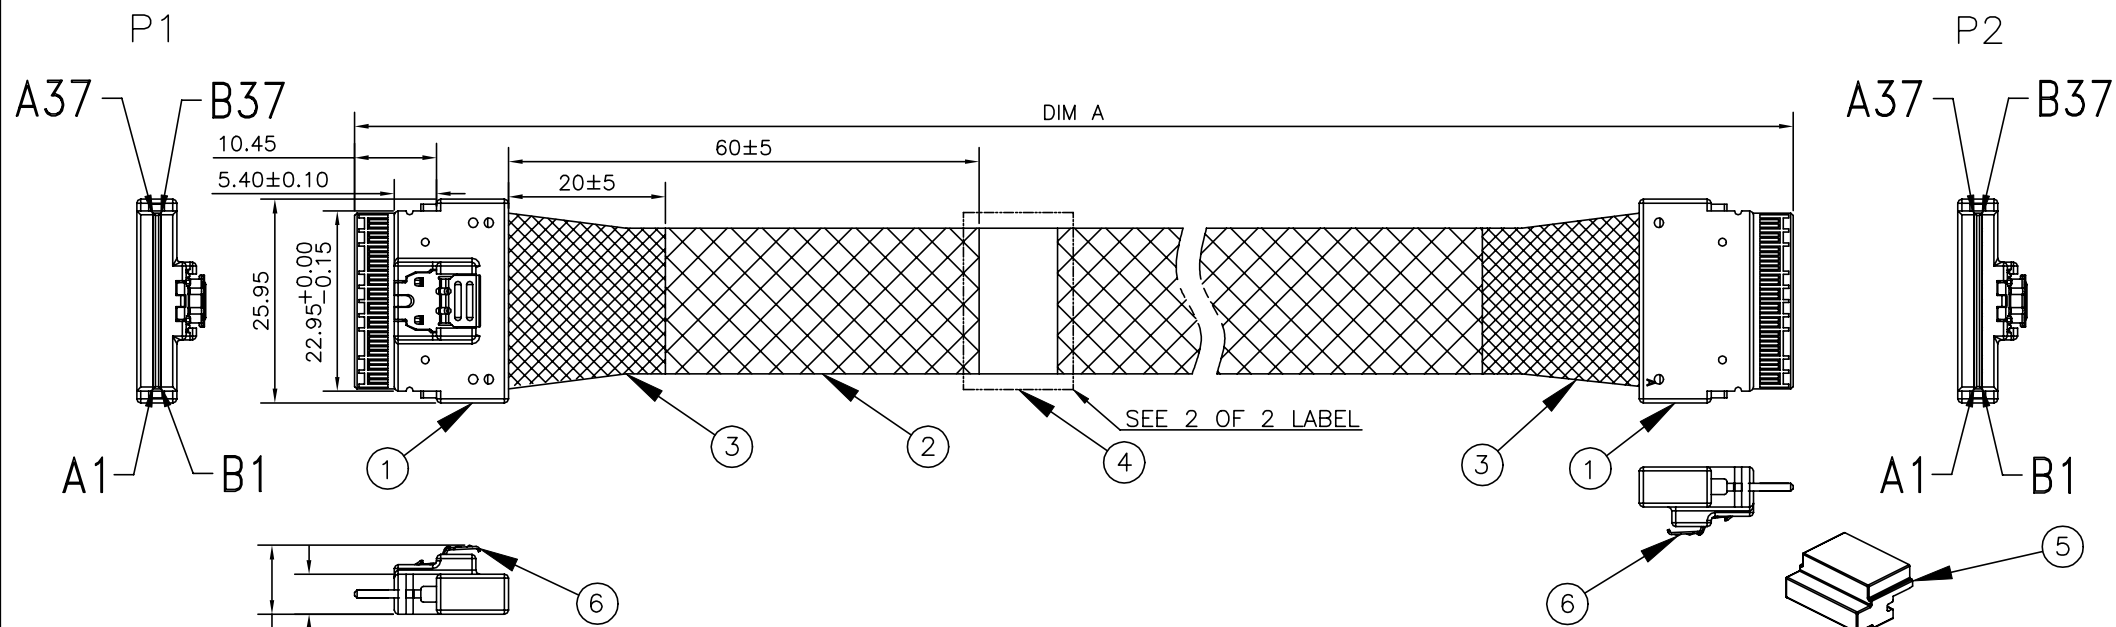

NOTES:

1. ALL CABLE 100% OPEN, SHORT, MISS WIRE & TRANSIENT FAULT TEST.
2. CONDUCTIVE RESISTANCE: 2 Ω MAX.
3. INSULATION RESISTANCE: 10M Ω MIN WITH 200Vac AT 10ms.
4. HIGH FREQUENCY TEST MUST COMPLY WITH SAS 4.0 REQUIREMENT.
CONNECTOR IMPEDANCE: 100Ω ±15Ω
CABLE IMPEDANCE: 100Ω ±10Ω
5. ALL MATERIAL AND PROCESS MUST BE MEET THE REQUIREMENT OF RoHS2.0
6. PRODUCT SPEC. REFER TO PS-728XX-02XXX-XXX
7. PDR NUMBER: 100Ω 32AWG:APP1100084
8. PART NUMBER:

728XX- XX XXX - XXX
 SERIES CODE 08:8i ST/ST 100Ω CUSTOMER CODE 001:ACES
 PORT NUMBER 02:2PORT SERIAL NUMBER 001

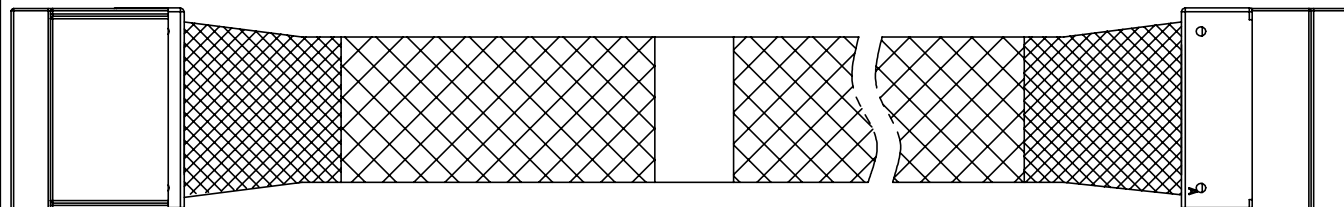

ITEM	DESCRIPTION	Q'TY	UNIT
1	SLIMLINE 8I STRAIGHT 100Ω & SLIMLINE 8I STRAIGHT 100Ω	2	PCS
2	EXPANDO TUBE.	A/R	MM
3	ACETATE TAPE COLOR: BLACK.	A/R	MM
4	LABEL.	A/R	MM
5	DUST COVER, PE, COLOR: WHITE.	2	PCS
6	LATCH.	2	PCS

QUALITY SYMBOLS
 MAJOR Ⓢ
 CRITICAL Ⓢ
 GENERAL TOLERANCES (UNLESS SPECIFIED)
 X. ±0.5
 .X ±0.25
 .XX ±0.15
 .XXX ±0.10
 ANGLES ±2°

DRAWN BY Hu, Guama Zong	DATE 21/02/18
CHECKED BY Chan, Ching Jung	DATE 21/02/18
APPROVED BY Chan, Ching Jung	DATE 21/02/18
UNITS mm	SCALE 1 : 1
SHEET NO. 1 OF 2	REV A


ACES ELECTRONICS

TITLE
FPSLIMSAS 4.0 8I ST 100Ω
TO SLIMSAS 4.0 8I ST 100Ω

RFQ NO. NA

DWG NO. 72808-02001-001

72808-02001-001	PART NUMBER
1000±15	DIM A

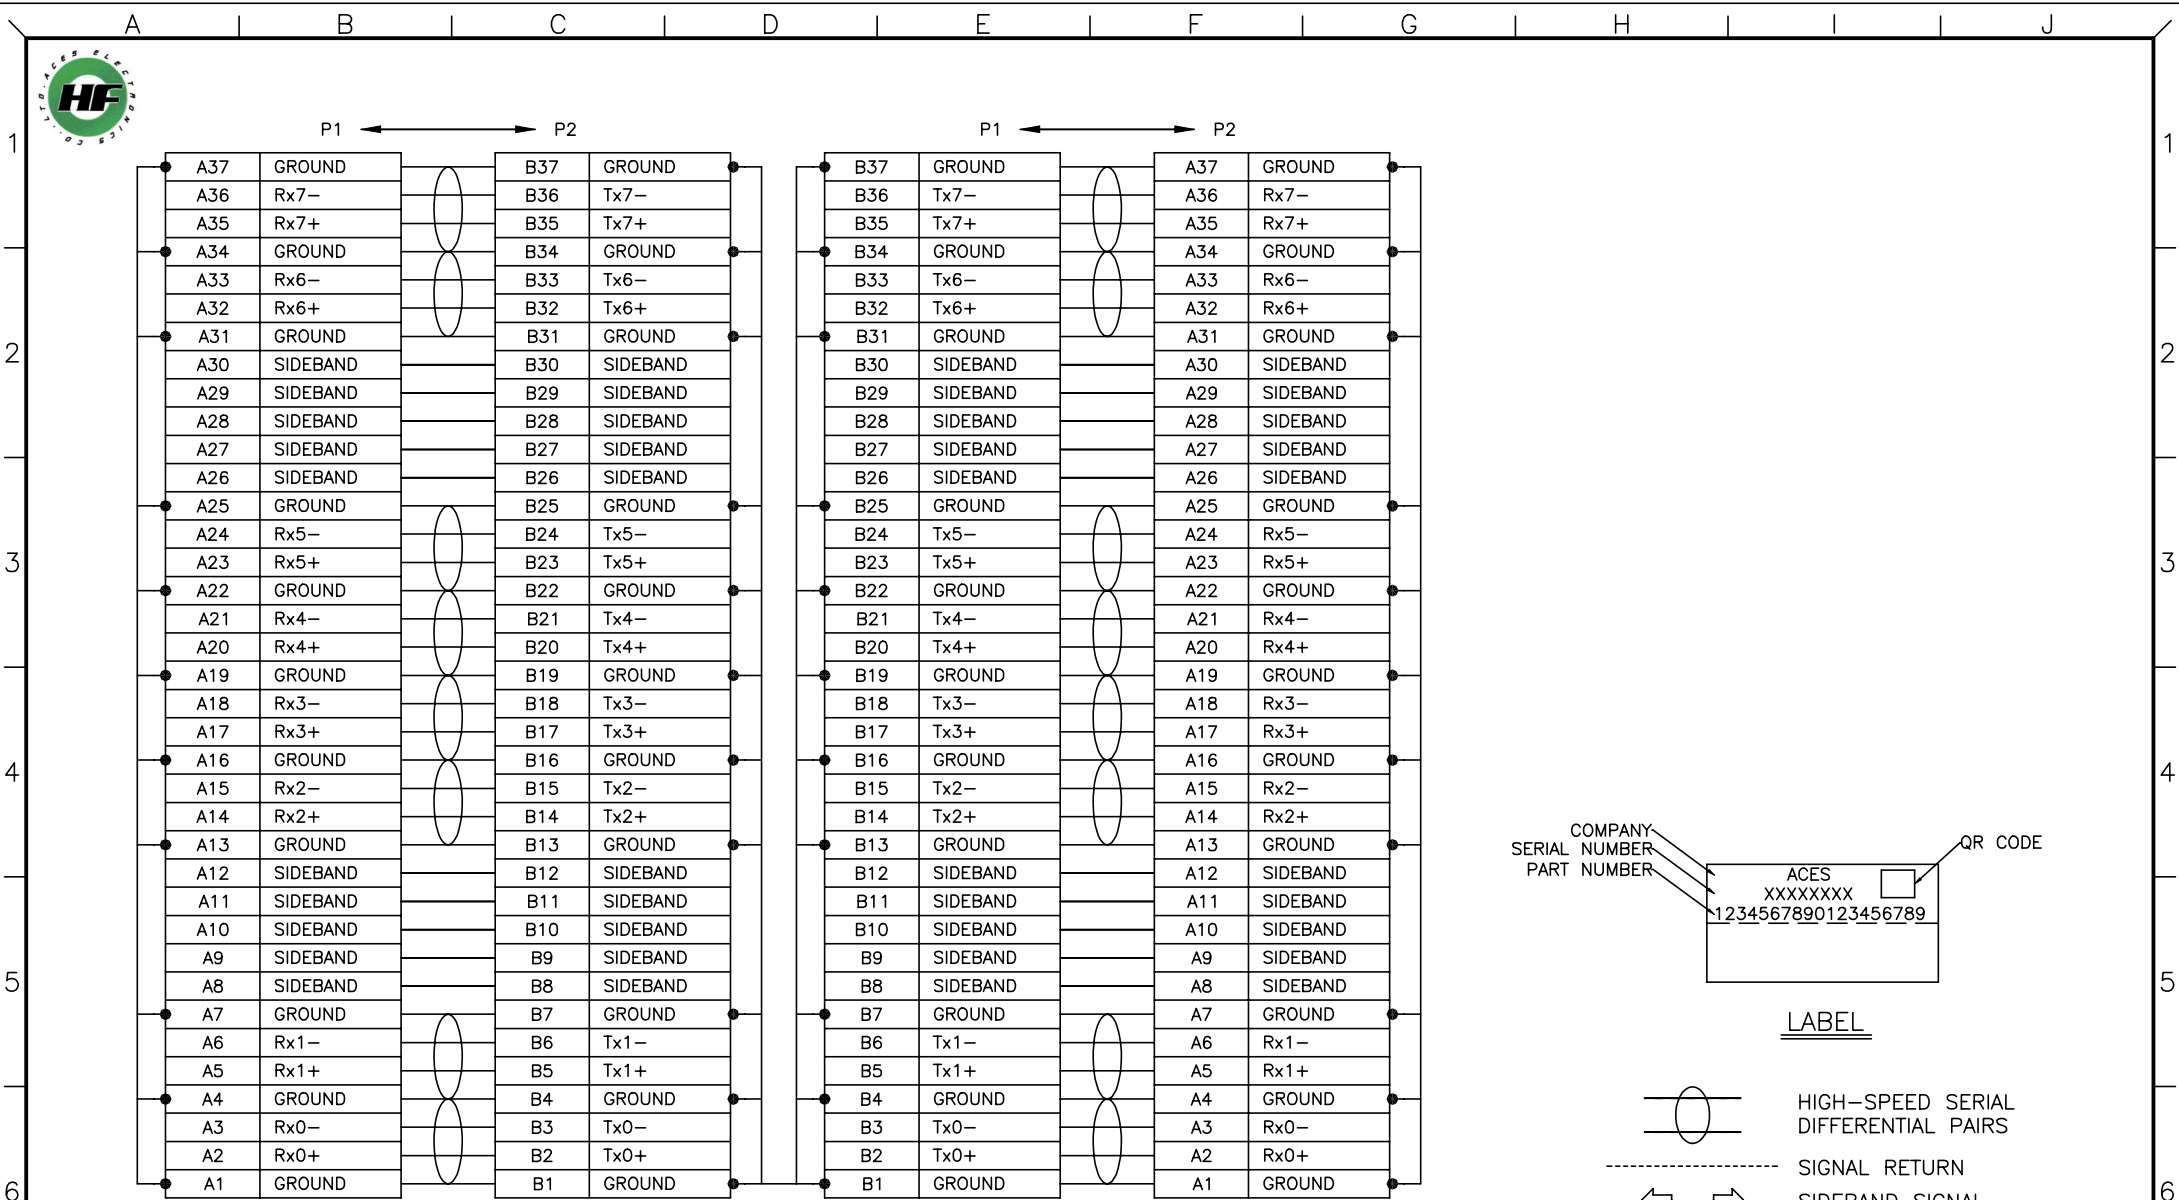


COMPANY SERIAL NUMBER PART NUMBER

ACES
XXXXXXXX
1234567890123456789

QR CODE

LABEL

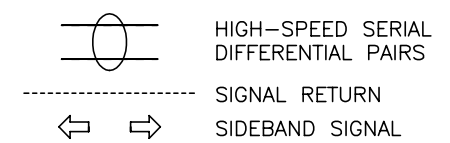

QUALITY SYMBOLS MAJOR CRITICAL	DRAWN BY Hu, Guama Zong	DATE 21/02/18	
	CHECKED BY Chan, Ching Jung	DATE 21/02/18	
GENERAL TOLERANCES (UNLESS SPECIFIED) X. ±0.5 .X ±0.25 .XX ±0.15 .XXX ±0.10 ANGLES ±2°	APPROVED BY Chan, Ching Jung	DATE 21/02/18	RFO NO. NA
UNITS mm		SIZE A4	DWG NO. 72808-02001-001
SCALE 1 : 1	SHEET NO. 2 OF 2	REV A	