
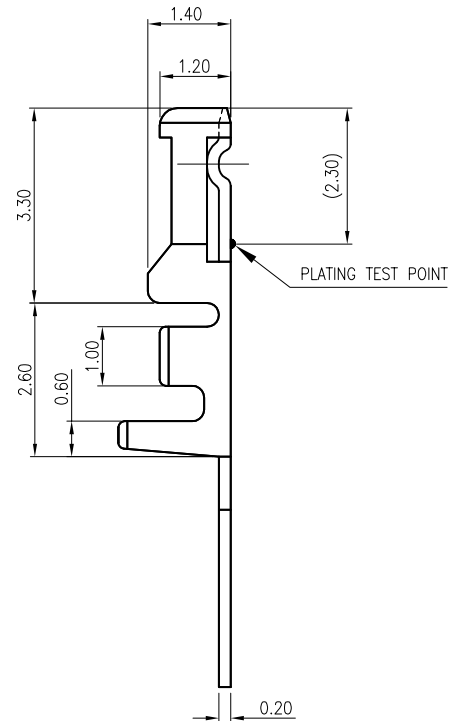
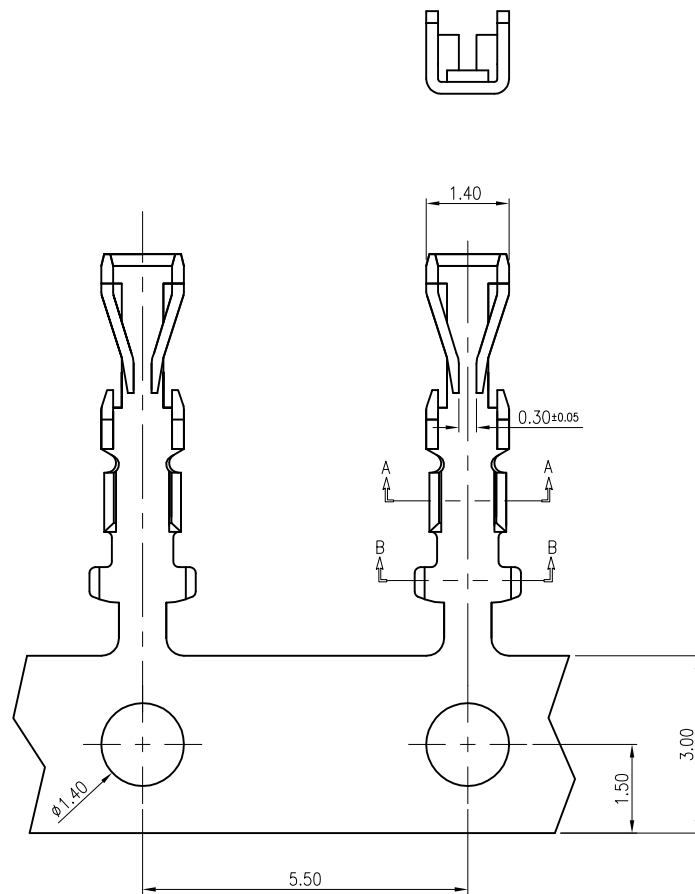


SEC. A-A




SEC. B-B

NOTES:

1. MATERIAL: PHOSPHOR BRONZE (C5191R-H)
THICKNESS: 0.20±0.01mm
2. PLATING:
50u" MIN. NICKEL UNDER PLATING OVERALL.
□: GOLD FLASH
L: 80u" MIN. PURE TIN
T: 10u" MIN. GOLD ON CONTACT AREA
3. WIRE RANGE: UL 1571 AWG#26, INSULATION O.D.=0.90±0.03mm
UL 1571 AWG#28, INSULATION O.D.=0.80±0.03mm
UL 1571 AWG#30, INSULATION O.D.=0.70±0.05mm
UL 10064 AWG#24, INSULATION O.D.=0.85±0.05mm
4. SPEC. PLS. REFER TO PS-50300-XXXX-XXX
5. Q'TY: 8,000 PCS/ROLL
6. PART NUMBER
88301 - W - X

PLATING
□: GOLD FLASH
L: 80u" MIN. PURE TIN
T: 10u" MIN. GOLD

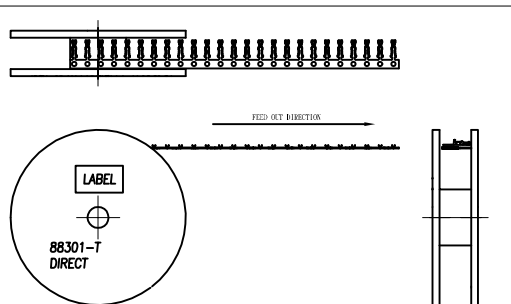

QUALITY SYMBOLS MAJOR  CRITICAL 	DRAWN BY		DATE			
	Xu, JinJun		'22/11/09			
	CHECKED BY		DATE		TITLE	
	Xu, ZhiZhong		'22/11/09			
GENERAL TOLERANCES (UNLESS SPECIFIED) X. ±0.5 .X ±0.25 .XX ±0.15 .XXX ±0.1 ANGLES ±2°	APPROVED BY		DATE		TERMINAL(2.0MM POWER)	
	Xu, ZhiZhong		'22/11/09			
	UNITS		SIZE	RFQ NO.		
	mm		A4	NA		
SCALE	SHEET NO.		REV	DWG NO.		
8:1	1 OF 1		F	88301-W-X		