Notes :

1. Materail is Copper Alloy (t=0.10mm)
2. Plating : 50~100u" Ni PLATING OVERALL.
   1:GOLD FLASH
   N:50~100u" MATT TIN .
3. Crimping SPEC. PLS. Refer to PS-88604-T0XX
4. After crimping, control terminal length: 4.5mm Max.
5. Applicable wires :
   UL1571 AWG#32 OD=0.39±0.02
   UL1571 AWG#34 OD=0.32±0.01

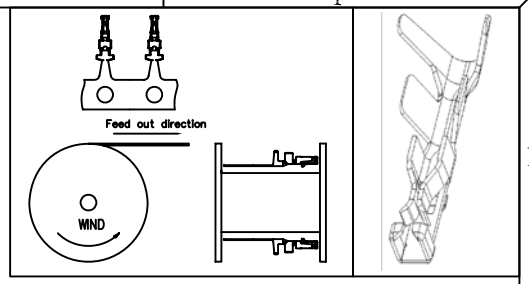

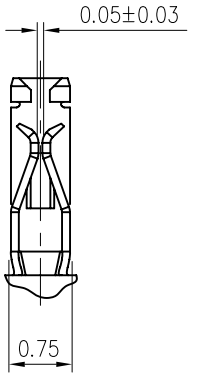

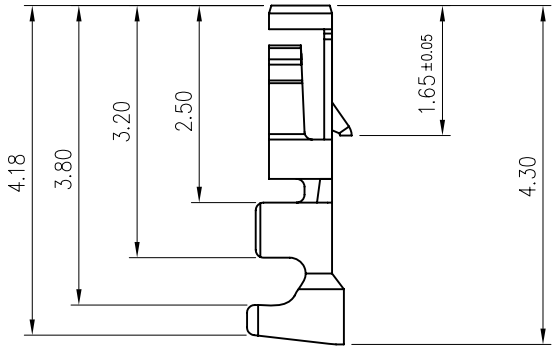

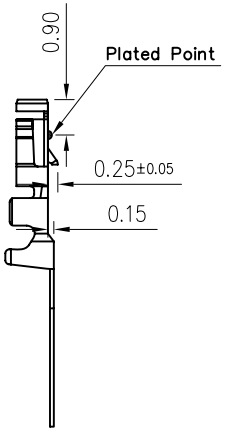

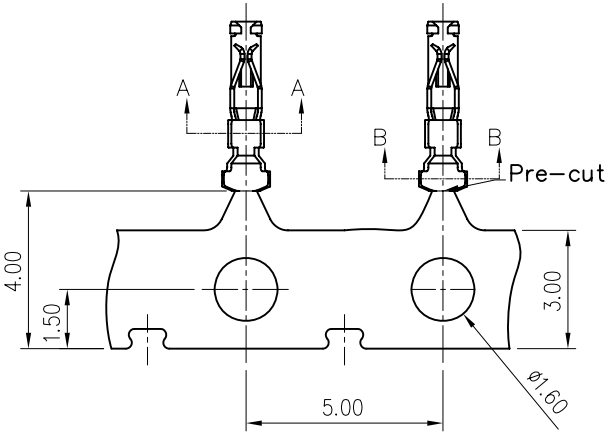



SECTION B-B

SCEAL 2:1



SECTION A-A

SCEAL 2:1

P/N Legend

88604-000 X X-XXX

- 001: Initial
- Plating
  - 1: Gold Flash
  - N: Matt Tin(Lead Free)
- Packing
  - 0: Reel

一般公差 TOLERANCES X. ±0.5 .XX ±0.15 .X ±0.25 .XXX ±0.1 ANGLES ±2°	宏致電子股份有限公司 Aces Electronic Co.,Ltd.		
檢驗尺寸標示 SYMBOLS ◎ ⓜ INDICATE CLASSIFICATION DIMENSION ◎ MARK IS CRITICAL DIM. ⓜ MARK IS MAJOR DIM.	品名 (TITLE) 1.0 mm pitch WTB Crimping Terminal	製圖 (DR) '12/05/22 tanzhiwu	
	圖號 (DWG.NO) 88604-000XX-XXX	番核 (CHKD) Sam	
		核准 (APPD) Jason	
表面處理 (FINISH)	比例 (SCALE) 5:1 / 單位 (UNITS) mm	張數 (SHEET) 1 OF 1	SIZE A4 / REV B