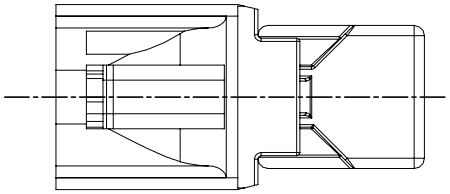

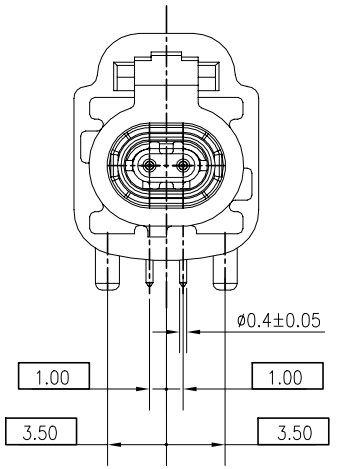

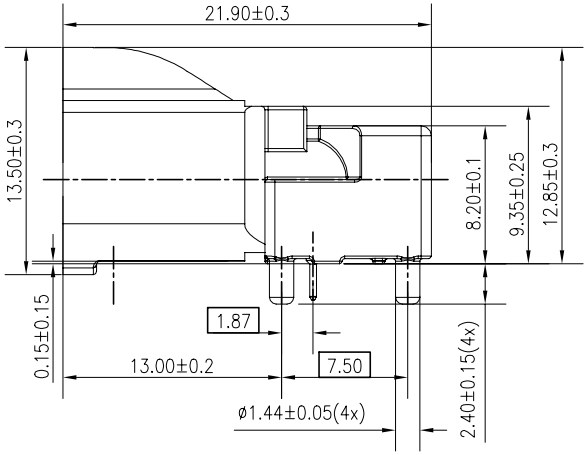

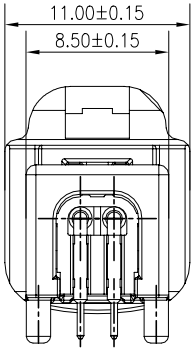

NOTES:
1. MATERIAL:
   1.1 HOUSING: PA9T
   1.2 DIELECTRIC: LCP
   1.3 SHELL: ZAMAK3
   1.4 CONTACT: BRASS
2. FINISH
   CONTACT:
   CONTACT:SEE ORDER INFORMATION
   UNDERPLATING:50~100u" NICKEL OVERALL
   SHELL:120u"~240u" MATTE TIN
3. SPEC. PLS. REFER TO PS 92806-XXXXX-XXX
4. PACKAGE PLS. REFER TO 92806-001CR-U
5. PART NUMBER

92806-001 X X -XXX
- CKTS
- PACKING: 0:TAPE & REEL
- PLATING: 8: 6u"GOLD
- Coding: CAZ:Z KEY

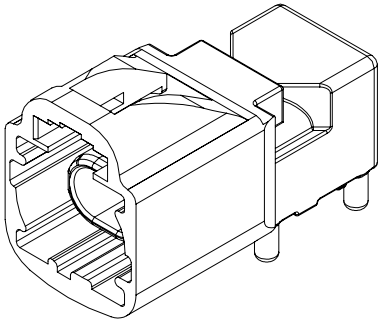

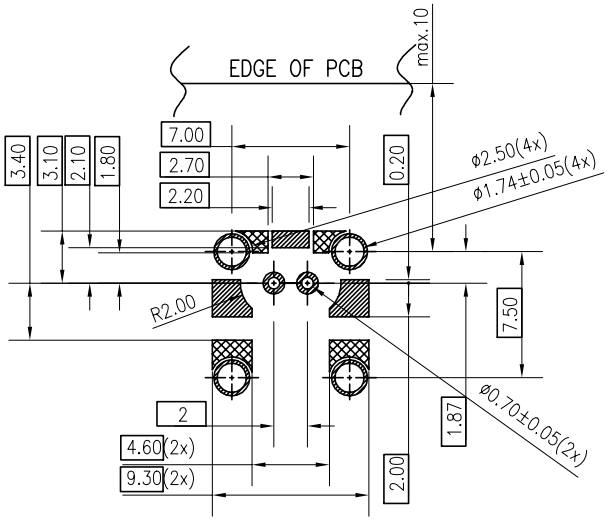

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

Solder Area

Keep out Area

QUALITY SYMBOLS MAJOR M CRITICAL C	DRAWN BY / DATE: CHUNG Ping Chang 21'/04/19	ACES ELECTRONICS	
GENERAL TOLERANCES (UNLESS SPECIFIED) X. ±0.15 .X ±0.10 .XX ±0.05 .XXX ±0.02 ANGLES ±1°	CHECKED BY / DATE: LEE Kuang En 21'/04/19 APPROVED BY / DATE: CHEN Chi Chang 21'/04/19	TITLE: H-MTD PCB PLUG RIGHT ANGLE SINGLE	
	UNITS: mm	SIZE: A4	RFQ NO.: NA
	SCALE: 1 : 1 / SHEET NO.: 1 OF 1	REV: A	DWG NO.: 92806-001XX-XXX