



SPECIFICATION

宏致電子股份有限公司

桃園縣中壢市東園路13號

No.13, Dongyuan Rd., Zhongli City,

Taoyuan County 320, Taiwan (R.O.C.)

TEL: +886-3-463-2808

FAX: +886-3-463-1800

SPEC. NO.: PS-50463-XXXXX-XXX REVISION: B

PRODUCT NAME: 0.4 WTB COAX. REPT/PLUG CONN.

PRODUCT NO: 50463,50464 SERIES

PREPARED: XUFEI DATE: 2014/01/14	CHECKED: JERRY DATE: 2014/01/14	APPROVED: JASON DATE: 2014/01/14
---	--	---



Aces P/N: **50463,50464 series**

TITLE: **0.4 WTB COAX. REPT/PLUG CONN.**

RELEASE DATE: **2014.01.14**

REVISION: B

ECN No: **ECN-1401240**

PAGE: **2** OF **10**

1	REVISION HISTORY	3
2	SCOPE.....	4
3	APPLICABLE DOCUMENTS	4
4	REQUIREMENTS	4
5	PERFORMANCE	5
6	INFRARED REFLOW CONDITION.....	8
7	PRODUCT QUALIFICATION AND TEST SEQUENCE	9
8	INSERTION / EXTRACTION FORCE	10



Aces P/N: **50463,50464 series**

TITLE: **0.4 WTB COAX. REPT/PLUG CONN.**

RELEASE DATE: 2014.01.14

REVISION: B

ECN No: ECN-1401240

PAGE: **3** OF **10**

1 Revision History

Rev.	ECN #	Revision Description	Prepared	Date
1	ECN-1102068	PROPOSAL	ALEX	2011/02/18
2	ECN-1106201	ADD AWG#36~42	ALEX	2011/05/17
O	ECN-1107032	REV-O	ALEX	2011/07/02
O1	ECN-1112235	ADD 14PIN	ALEX	2011/12/13
A	ECN-1202139	REV-A	ALEX	2012/02/13
B	ECN-1401240	ADD WORKING VOLTAGE	XUFEI	2014/01/14

TITLE: **0.4 WTB COAX. REPT/PLUG CONN.**RELEASE DATE: **2014.01.14**REVISION: **B**ECN No: **ECN-1401240**PAGE: **4** OF **10**

2 SCOPE

This specification covers performance, tests and quality requirements for **0.4 WTB COAX CONN.**
REPT CONN. P/N : **50463**
PLUG CONN. P/N : **50464**

3 APPLICABLE DOCUMENTS

EIA-364: ELECTRONICS INDUSTRIES ASSOCIATION

4 REQUIREMENTS

4.1 Design and Construction

- 4.1.1 Product shall be of design, construction and physical dimensions specified on applicable product drawing.
- 4.1.2 All materials conform to R.o.H.S. and the standard depends on TQ-WI-140101.

4.2 Materials and Finish

- 4.2.1 Contact: High performance copper alloy (**Phosphor Bronze**)
Finish: (a) Contact Area: **Refer to the drawing.**
(b) Under plate: **Refer to the drawing.**
(c) Solder area: **Refer to the drawing.**
- 4.2.2 Housing: Thermoplastic or Thermoplastic High Temp., UL94V-0
- 4.2.3 Fitting Nail : **Copper Alloy, Finish: Refer to the drawing.**

4.3 Ratings

- 4.3.1 **Working voltage less than 36 volts (per pin)**
- 4.3.2 Voltage: **100 Volts AC (per pin)**
- 4.3.3 Current: Coaxial cables **AWG#36~42**, 0.24 Amperes /pin
- 4.3.4 Operating Temperature : **-40°C to +85°C**

TITLE: **0.4 WTB COAX. REPT/PLUG CONN.**

RELEASE DATE: 2014.01.14

REVISION: B

ECN No: ECN-1401240

PAGE: 5 OF 10

5 Performance

5.1. Test Requirements and Procedures Summary

Item	Requirement	Standard
Examination of Product	Product shall meet requirements of applicable product drawing and specification.	Visual, dimensional and functional per applicable quality inspection plan.
ELECTRICAL		
Item	Requirement	Standard
Low Level Contact Resistance	60 m Ω Max.(initial)per contact ΔR 40 m Ω Max.	Mate connectors, measure by dry circuit, 20mV Max., 100mA Max. (EIA-364-23)
Insulation Resistance	Initial :1000 M Ω Min. Finish:500 M Ω Min.	Unmated connectors, apply 250 V DC between adjacent terminals. (EIA-364-21)
Dielectric Withstanding Voltage	No discharge, flashover or breakdown. Current leakage: 1 mA max.	250 VAC Min. at sea level for 1 minute. Test between adjacent contacts of unmated connectors. (EIA-364-20)
Temperature Rise	30°C Max. Change allowed	Mate connector: measure the temperature rise at rated current until temperature stable. The ambient condition is still air at 25°C (EIA-364-70,METHOD1,CONDITION1)

MECHANICAL		
Item	Requirement	Standard
Durability	30 cycles.	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of 25.4 \pm 3mm/min. (EIA-364-09)
Mating / Unmating Forces	See item 8	Operation Speed : 25.4 \pm 3 mm/minute.. Measure the force required to mate/unmate connector. (EIA-364-13)
Contact Retention Force (REPT SIDE)	30gf Min.	Operation Speed : 25.4 \pm 3 mm/minute. Measure the contact retention force with tester.

TITLE: **0.4 WTB COAX. REPT/PLUG CONN.**

RELEASE DATE: 2014.01.14

REVISION: B

ECN No: ECN-1401240

PAGE: 6 OF 10

Vibration	1 μ s Max.	The electrical load condition shall be 100 mA maximum for all contacts. Subject to a simple harmonic motion having amplitude of 0.76mm (1.52mm maximum total excursion) in frequency between the limits of 10 and 55 Hz. The entire frequency range, from 10 to 55 Hz and return to 10 Hz, shall be traversed in approximately 1 minute. This motion shall be applied for 2 hours in each of three mutually perpendicular directions. (EIA-364-28 Condition I)
Shock (Mechanical)	1 μ s Max.	Subject mated connectors to 50 G's (peak value) half-sine shock pulses of 11 milliseconds duration. Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). The electrical load condition shall be 100mA maximum for all contacts. (EIA-364-27, test condition A)

ENVIRONMENTAL

Item	Requirement	Standard
Thermal Shock	See Product Qualification and Test Sequence Group 4	Mate module and subject to follow condition for 5 cycles. 1 cycles: -55 +0/-3 °C, 30 minutes +85 +3/-0 °C, 30 minutes (EIA-364-32, test condition I)
Humidity	See Product Qualification and Test Sequence Group 4	Mated Connector 40°C, 90~95% RH, 96 hours. (EIA-364-31, Condition A, Method II)
Temperature Life	See Product Qualification and Test Sequence Group 5	Subject mated connectors to temperature life at 85°C for 96 hours. (EIA-364-17, Test condition A)

TITLE: **0.4 WTB COAX. REPT/PLUG CONN.**

RELEASE DATE: **2014.01.14**

REVISION: B

ECN No: **ECN-1401240**

PAGE: **7** OF **10**

Salt Spray (Only For Gold Plating)	See Product Qualification and Test Sequence Group 6	Subject mated/unmated connectors to 5% salt-solution concentration, 35℃ 48 hours (EIA-364-26)
Resistance to Reflow Soldering Heat (REPT SIDE)	See Product Qualification and Test Sequence Group 1 (Lead Free)	Pre Heat : 150℃~180℃, 60~120sec. Heat : 230℃ Min., 40sec Min. Peak Temp. : 260℃ Max, 10sec Max.
Solder ability	Tin plating: Solder able area shall have minimum of 95% solder coverage. Gold plating: Solder able area shall have minimum of 75% solder coverage	And then into solder bath, Temperature at 245 ±5℃ , for 4-5 sec. (EIA-364-52)
Hand Soldering Temperature Resistance	Appearance: No damage	T ≥ 350℃, 3sec at least.

Note. Flowing Mixed Gas shall be conducted by customer request.

TITLE: **0.4 WTB COAX. REPT/PLUG CONN.**

RELEASE DATE: 2014.01.14


REVISION: B

ECN No: ECN-1401240

PAGE: **8** OF **10**

6 INFRARED REFLOW CONDITION

6.1 Lead-Free Process

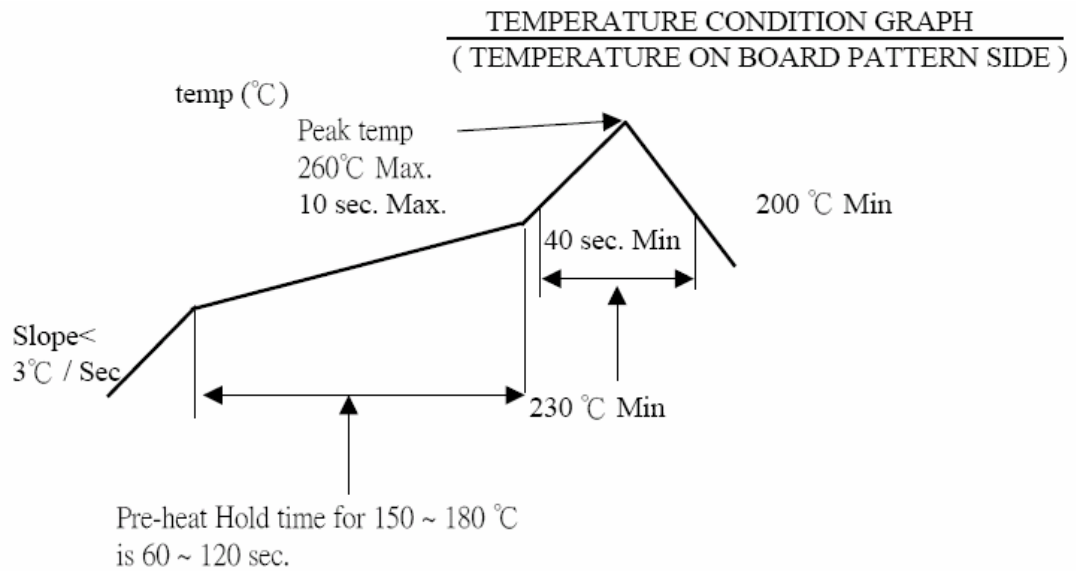

TITLE: **0.4 WTB COAX. REPT/PLUG CONN.**

RELEASE DATE: 2014.01.14

REVISION: B

ECN No: ECN-1401240

PAGE: 9 OF 10

7 PRODUCT QUALIFICATION AND TEST SEQUENCE

Test or Examination	Test Group										
	1	2	3	4	5	6	7	8	9		
	Test Sequence										
Examination of Product	1、4	1、6	1、6	1、8	1、7	1、5	1	1	1		
Low Level Contact Resistance		3、7	3、7	3、9	3、8	3、6					
Insulation Resistance				4、10	4、9						
Dielectric Withstanding Voltage				5、11	5、10						
Temperature Rise	3										
Mating / Unmating Forces		4、8									
Durability		5									
Contact Retention Force(Rept Side)							2				
Vibration			4								
Shock (Mechanical)			5								
Thermal Shock				6							
Humidity				7							
Temperature Life					6						
Salt Spray(Only For Gold Plating)						4					
Resistance to Soldering Heat	2	2	2	2	2	2					
Solder ability								2			
Hand Soldering Temperature Resistance									2		
Sample Size	2	4	4	4	4	4	4	2	4		

TITLE: **0.4 WTB COAX. REPT/PLUG CONN.**RELEASE DATE: **2014.01.14**REVISION: **B**ECN No: **ECN-1401240**PAGE: **10** OF **10****8 Mating / Unmating Force**

NO. OF Ckt.	Initial/ After 30 th Cycle	
	Mating Force (Max.)	Unmating Force (Min.)
10	29N	1.2N
14	30N	1.45N
20	31N	1.76N
30	33N	2.65N
40	35N	3.5N