



SPECIFICATION

宏致電子股份有限公司

桃園縣中壢市東園路13號

No.13, Dongyuan Rd., Zhongli City,

Taoyuan County 320, Taiwan (R.O.C.)

TEL: +886-3-463-2808

FAX: +886-3-463-1800

SPEC. NO.: PS-50611-XXXXX-XXX REVISION: B

PRODUCT NAME: 1.0 mm Pitch FPC / CIC CONNECTOR

PRODUCT NO: 50611 , 50612 , 50613 , 50614 , 50615 SERIES

PREPARED: XIAOXIONG DATE: 2016/05/25	CHECKED: ANDREW DATE: 2016/05/25	APPROVED: CHARLESLEE DATE: 2016/05/25
---	---	--



TITLE: **1.0 mm Pitch FPC / CIC Connector**

RELEASE DATE: 2016.05.25

REVISION: B

ECN No: 1605472

PAGE: **2** OF **11**

1	REVISION HISTORY	3
2	SCOPE	4
3	APPLICABLE DOCUMENTS.....	4
4	REQUIREMENTS	4
5	PERFORMANCE	5
6	INFRARED REFLOW CONDITION	8
7	PRODUCT QUALIFICATION AND TEST SEQUENCE.....	9
8	FPC RETENTION FORCE	10
9	ACTUATOR INSERTION / WITHDRAWING FORCE	11



Aces P/N: **50611 series**

TITLE: **1.0 mm Pitch FPC / CIC Connector**

RELEASE DATE: 2016.05.25

REVISION: B

ECN No: 1605472

PAGE: **3** OF **11**

1 Revision History

Rev.	ECN #	Revision Description	Prepared	Date
O	ECN-0812016	NEW SPEC	JASON	2008/12/05
A	ECN-1401269	ADD WORKING VOLTAGE	XUFEI	2014/01/15
B	ECN-1605472	ADD PRODUCT QUALIFICATION AND TEST SEQUENCE	XIAOXIONG	2016/05/25

TITLE: **1.0 mm Pitch FPC / CIC Connector**

RELEASE DATE: 2016.05.25

REVISION: B

ECN No: 1605472

PAGE: 4 OF 11

2 SCOPE

This specification covers performance, tests and quality requirements for **1.0 mm pitch SMT type FPC / CIC connector**

Aces's P/N : 50611series, 50612series, 50613series, 50614series, 50615 series.

3 APPLICABLE DOCUMENTS

EIA-364: ELECTRONICS INDUSTRIES ASSOCIATION

4 REQUIREMENTS

4.1 Design and Construction

- 4.1.1 Product shall be of design, construction and physical dimensions specified on applicable product drawing.
- 4.1.2 All materials conform to R.o.H.S. and the standard depends on TQ-WI-140101.

4.2 Materials and Finish

- 4.2.1 Contact: High performance copper alloy (**Phosphor Bronze**)
Finish: (a) Contact Area: **Refer to the drawing.**
(b) Under plate: **Refer to the drawing.**
(c) Solder area: **Refer to the drawing.**
- 4.2.2 Housing: Thermoplastic or Thermoplastic High Temp., **UL94V-0**
- 4.2.3 Actuator: Thermoplastic or Thermoplastic High Temp., **UL94V-0**
- 4.2.4 Fitting Nail: **Copper Alloy, Finish: Refer to the drawing.**

4.3 Ratings

- 4.3.1 Working voltage less than 36 volts (per pin)
- 4.3.2 Voltage: **125 V [AC(rms)/DC]**
- 4.3.3 Current: **1 A [AC(rms)/DC]**
- 4.3.4 Operating Temperature : **-40°C to +85°C**

TITLE: **1.0 mm Pitch FPC / CIC Connector**

RELEASE DATE: 2016.05.25

REVISION: B

ECN No: 1605472

PAGE: **5** OF **11**

5 Performance

5.1. Test Requirements and Procedures Summary

Item	Requirement	Standard
Examination of Product	Product shall meet requirements of applicable product drawing and specification.	Visual, dimensional and functional per applicable quality inspection plan.
ELECTRICAL		
Item	Requirement	Standard
Low Level Contact Resistance	30 m Ω Max.(initial)per contact 20 m Ω Max.Change allowed	Mate connectors, measure by dry circuit, 20mV Max., 100mA Max. (EIA-364-23)
Insulation Resistance	100 M Ω Min.	Unmated connectors, apply 500 V DC between adjacent terminals. (EIA-364-21)
Dielectric Withstanding Voltage	No discharge, flashover or breakdown. Current leakage: 1 mA max.	500 VAC Min. at sea level for 1 minute. Test between adjacent contacts of unmated connectors. (EIA-364-20)
Temperature Rise	30°C Max. Change allowed	Mate connector: measure the temperature rise at rated current until temperature stable. The ambient condition is still air at 25°C (EIA-364-70, METHOD1,CONDITION1)

TITLE: **1.0 mm Pitch FPC / CIC Connector**

RELEASE DATE: 2016.05.25

REVISION: B

ECN No: 1605472

PAGE: **6** OF **11**

MECHANICAL		
Item	Requirement	Standard
Durability	30 cycles.	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of 25.4 ± 3mm/min. (EIA-364-09)
FPC Retention Force	Refer to page.10 FPC retention force	A connector shall be soldered on a board and insert the actuator, pull the FPC at the speed rate of 25.4 ± 3 mm/min.
Actuator Insertion / Withdrawing Force	Refer to page.11 Actuator insertion/withdrawing force	A connector shall be soldered on a board and inserted and withdrawing at the speed rate of 25.4 ± 3 mm/min.
Terminal /Housing Retention Force	0.3kgf MIN.	Operation Speed : 25.4 ± 3 mm/minute. Measure the contact retention force with tester.
Vibration	1 μ s Max.	The electrical load condition shall be 100 mA maximum for all contacts. Subject to a simple harmonic motion having amplitude of 0.76mm (1.52mm maximum total excursion) in frequency between the limits of 10 and 55 Hz. The entire frequency range, from 10 to 55 Hz and return to 10 Hz , shall be traversed in approximately 1 minute. This motion shall be applied for 2 hours in each of three mutually perpendicular directions. (EIA-364-28 Condition I)
Shock (Mechanical)	1 μ s Max.	Subject mated connectors to 50 G's (peak value) half-sine shock pulses of 11 milliseconds duration. Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). The electrical load condition shall be 100mA maximum for all contacts. (EIA-364-27, test condition A)

TITLE: **1.0 mm Pitch FPC / CIC Connector**

RELEASE DATE: 2016.05.25

REVISION: B

ECN No: 1605472


PAGE: **7** OF **11**

ENVIRONMENTAL

Item	Requirement	Standard
Resistance to Reflow Soldering Heat	See Product Qualification and Test Sequence Group 10 (Lead Free)	Pre Heat : 150°C~180°C, 60~120sec. Heat : 230°C Min., 40sec Min. Peak Temp. : 260°C Max, 10sec Max. Reflow number cycle : 2 times
Thermal Shock	See Product Qualification and Test Sequence Group 4	Mate module and subject to follow condition for 5 cycles. 1 cycles: -55 +0/-3 °C, 30 minutes +85 +3/-0 °C, 30 minutes (EIA-364-32, test condition I)
Humidity	See Product Qualification and Test Sequence Group 4	Mated Connector 40°C, 90~95% RH, 96 hours. (EIA-364-31, Condition A, Method II)
Temperature Life	See Product Qualification and Test Sequence Group 5	Subject mated connectors to temperature life at 85°C for 96 hours . (EIA-364-17, Test condition A)
Salt Spray (Only For Gold Plating)	See Product Qualification and Test Sequence Group 6	Subject mated/unmated connectors to 5% salt-solution concentration, 35°C (I) Gold flash for 8 hours (II) Gold plating 5 u" for 96 hours. (EIA-364-26)
Solder ability	Tin plating: Solder able area shall have minimum of 95% solder coverage. Gold plating: Solder able area shall have minimum of 75% solder coverage	And then into solder bath, Temperature at 245 ±5°C , for 4-5 sec. (EIA-364-52)
Hand Soldering Temperature Resistance	Appearance: No damage	T ≥ 350°C, 3sec at least.

Note. Flowing Mixed Gas shall be conduct by customer request.

6 INFRARED REFLOW CONDITION

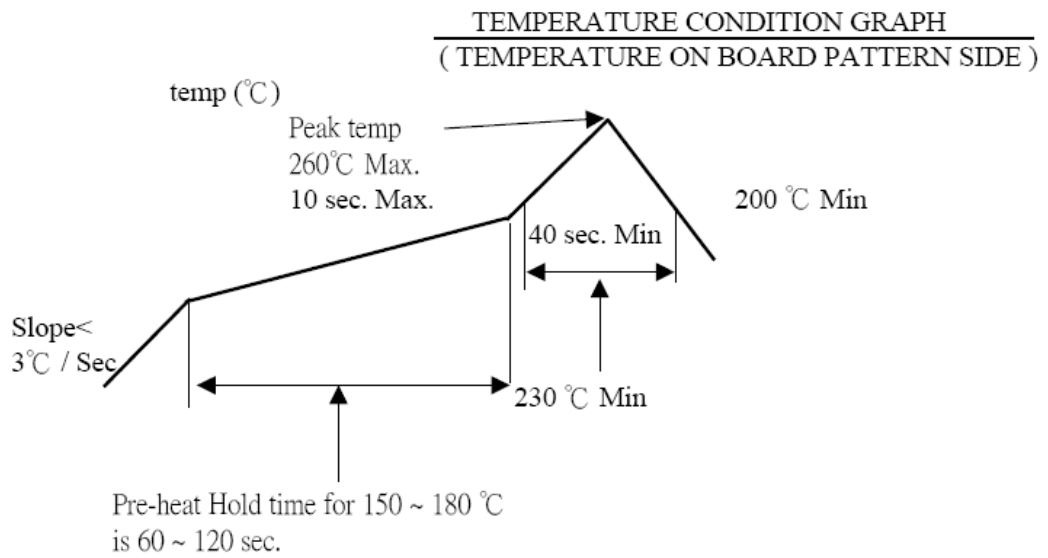



Aces P/N: **50611 series**

TITLE: **1.0 mm Pitch FPC / CIC Connector**

RELEASE DATE: 2016.05.25

REVISION: B

ECN No: 1605472

PAGE: **9** OF **11**

7 PRODUCT QUALIFICATION AND TEST SEQUENCE

Test or Examination	Test Group										
	1	2	3	4	5	6	7	8	9	10	11
	Test Sequence										
Examination of Product				1、7	1、6	1、4				1	1
Low Level Contact Resistance		1、5	1、4	2、10	2、9	2、5				3	
Insulation Resistance				3、9	3、8						
Dielectric Withstanding Voltage				4、8	4、7						
Temperature Rise	1										
Durability		3									
Vibration			2								
Shock (Mechanical)			3								
Thermal Shock				5							
Humidity				6							
Temperature Life					5						
Salt Spray(Only For Gold Plating)						3					
Solder ability							1				
FPC Retention Force		2、4									
Actuator Insertion / Withdrawing Force								1			
Terminal / Housing Retention Force									1		
Resistance to Soldering Heat										2	
Hand Soldering Temperature Resistance											2
Sample Size	2	4	4	4	4	4	2	4	4	4	4

TITLE: **1.0 mm Pitch FPC / CIC Connector**

RELEASE DATE: 2016.05.25

REVISION: B

ECN No: 1605472

PAGE: **10** OF **11**

8 FPC RETENTION FORCE

UNIT: Kgf

NO. OF Ckt.	FPC Retention Force (Min)		NO. OF Ckt.	FPC Retention Force (Min)	
	1st	10th		1st	10th
3	0.55	0.45	19	1.35	1.25
4	0.60	0.50	20	1.40	1.30
5	0.65	0.55	21	1.45	1.35
6	0.70	0.60	22	1.50	1.40
7	0.75	0.65	23	1.55	1.45
8	0.80	0.70	24	1.60	1.50
9	0.85	0.75	25	1.65	1.55
10	0.90	0.80	26	1.70	1.60
11	0.95	0.85	27	1.75	1.65
12	1.00	0.90	28	1.80	1.70
13	1.05	0.95	29	1.85	1.75
14	1.10	1.00	30	1.90	1.80
15	1.15	1.05	31	1.95	1.85
16	1.20	1.10	32	2.00	1.90
17	1.25	1.15	33	2.05	1.95
18	1.30	1.20	34	2.10	2.00

9 ACTUATOR INSERTION / WITHDRAWING FORCE

UNIT: Kgf

No. of Ckt	Insertion Force (Max)		Withdrawal Force (Min)	
	1st	30th	1st	30th
3	2.80	2.60	0.55	0.45
4	2.90	2.70	0.60	0.50
5	3.00	2.80	0.65	0.55
6	3.10	2.90	0.70	0.60
7	3.20	3.00	0.75	0.65
8	3.30	3.10	0.80	0.70
9	3.40	3.20	0.85	0.75
10	3.50	3.30	0.90	0.80
11	3.60	3.40	0.95	0.85
12	3.70	3.50	1.00	0.90
13	3.80	3.60	1.05	0.95
14	3.90	3.70	1.10	1.00
15	4.00	3.80	1.15	1.05
16	4.10	3.90	1.20	1.10
17	4.20	4.00	1.25	1.15
18	4.30	4.10	1.30	1.20
19	4.40	4.20	1.35	1.25
20	4.50	4.30	1.40	1.30
21	4.60	4.40	1.45	1.35
22	4.70	4.50	1.50	1.40
23	4.80	4.60	1.55	1.45
24	4.90	4.70	1.60	1.50
25	5.00	4.80	1.65	1.55
26	5.10	4.90	1.70	1.60
27	5.20	5.00	1.75	1.65
28	5.30	5.10	1.80	1.70
29	5.40	5.20	1.85	1.75
30	5.50	5.30	1.90	1.80
31	5.60	5.40	1.95	1.85
32	5.70	5.50	2.00	1.90
33	5.80	5.60	2.05	1.95
34	5.90	5.70	2.10	2.00