



SPECIFICATION

宏致電子股份有限公司

桃園縣中壢市東園路13號

No.13, Dongyuan Rd., Jhongli City,

Taoyuan County 320, Taiwan (R.O.C.)

TEL: +886-3-463-2808

FAX: +886-3-463-1800

SPEC. NO.: PS-50671-XXXX-XXX REVISION: G

PRODUCT NAME: 0.5mm PITCH EASY ON FPC CONN.

SMT R/A B/C TYPE

PRODUCT NO: 50671:50672:51519:51693 SERIES

PREPARED: XUBIN DATE: 2016/07/01	CHECKED: BRAVE DATE: 2016/07/01	APPROVED: FRANK DATE: 2016/07/01
---	--	---



TITLE: 0.5 MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: [2016/07/01](#)

REVISION: [G](#)

ECN No: [ECN-1607007](#)

PAGE: **2** OF **11**

1	REVISION HISTORY	3
2	SCOPE	4
3	APPLICABLE DOCUMENTS.....	4
4	REQUIREMENTS	4
5	PERFORMANCE	5
6	INFRARED REFLOW CONDITION	8
7	PRODUCT QUALIFICATION AND TEST SEQUENCE.....	9



Aces P/N: **50671series**

TITLE: **0.5 MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE**

RELEASE DATE: 2016/07/01

REVISION: **G**

ECN No: **ECN-1607007**

PAGE: **3** OF **11**

1 Revision History

Rev.	ECN #	Revision Description	Prepared	Date
O	ECN-0903012	Product Release	Jason	2009.03.03
A	ECN-0906171	Amend Plated Information	Jason	2009.06.18
B	ECN-0912276	Add P/N	Lou	2009.12.25
C	ECN-1008089	Add P/N	Lou	2010.08.17
D	ECN-1401109	ADD Working voltage	YANGYANG	2014/01/09
E	ECN-1511032	ADD FPC Retention Force FOR 55PIN	XUBIN	2015/11/02
F	ECN-1606109	Update Operating Temperature	XUBIN	2016/06/08
G	ECN-1607007	ADD 51693 SERIES	XUBIN	2016/07/01

TITLE: **0.5 MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE**RELEASE DATE: **2016/07/01**REVISION: **G**ECN No: **ECN-1607007**PAGE: **4** OF **11**

2 SCOPE

This specification covers performance, tests and quality requirements for **0.5&1.0 mm pitch Easy On FPC SMT Type connector**. These connectors are **50671/50672/ 51519 /51693SERIES**.

3 APPLICABLE DOCUMENTS

EIA-364 ELECTRONICS INDUSTRIES ASSOCIATION

4 REQUIREMENTS

4.1 Design and Construction

- 4.1.1 Product shall be of design, construction and physical dimensions specified on applicable product drawing.
- 4.1.2 All materials conform to R.o.H.S. and the standard depends on TQ-WI-140101.

4.2 Materials and Finish

- 4.2.1 Contact: High performance copper alloy (**Phosphor Bronze**)
Finish: (a) Contact Area: **Refer to the drawing.**
(b) Under plate: **Refer to the drawing.**
(c) Solder area: **Refer to the drawing.**
- 4.2.2 Housing: **Thermoplastic or Thermoplastic High Temp., UL94V-0**
- 4.2.3 Latch: **Thermoplastic or Thermoplastic High Temp., UL94V-0**
- 4.2.4 Ear: **Copper Alloy, Finish: Refer to the drawing.**

4.3 Ratings

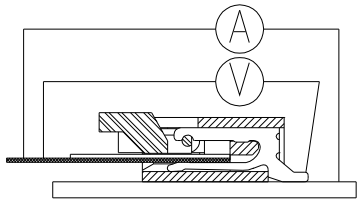
- 4.3.1 Working voltage less than 36 volts AC (per pin)
- 4.3.2 Voltage: **50 Volts AC**
- 4.3.3 Current: **0.5 Amperes (per pin)**
- 4.3.4 Operating Temperature : **-40°C to +85°C**

5 Performance

5.1. Test Requirements and Procedures Summary

Item	Requirement	Standard
Examination of Product	Product shall meet requirements of applicable product drawing and specification.	Visual, dimensional and functional per applicable quality inspection plan.

ELECTRICAL

Item	Requirement	Standard
Low Level Contact Resistance	55 m Ω Max.(initial)per contact ΔR 20 m Ω Max.	Mate connectors, measure by dry circuit, 20mV Max., 100mA Max.  (EIA-364-23)
Insulation Resistance	500 M Ω Min.	Unmated connectors, apply 500 V DC between adjacent terminals. (EIA-364-21)
Dielectric Withstanding Voltage	No discharge, flashover or breakdown. Current leakage: 2 mA max.	250 VAC Min. at sea level for 1 minute. Test between adjacent contacts of unmated connectors. (EIA-364-20)
Temperature rise	30°C Max. Change allowed	Mate connector: measure the temperature rise at rated current until temperature stable. The ambient condition is still air at 25°C (EIA-364-70,METHOD1,CONDITION1)

MECHANICAL

Item	Requirement	Standard
Contact Retention Force	200gf Min.	Operation Speed : 25.4 ± 3 mm/minute. Measure the contact retention force with Tensile strength tester.
Durability	30 cycles.	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of 25.4 ± 3mm/min. (EIA-364-09)



Aces P/N: **50671 series**

TITLE: 0.5 MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: **2016/07/01**

REVISION: **G**

ECN No: **ECN-1607007**

PAGE: **6** OF **11**

FPC Retention Force	Refer to FPC withdrawal force	Insert the actuator, pull the FPC at the speed rate of 25.4 ± 3 mm/min.
Fitting Nail /Housing Retention Force	200gf Min.	Operation Speed : 25.4 ± 3 mm/minute. Measure the contact retention force with Tensile strength tester.
Vibration	1 μs Max.	The electrical load condition shall be 100 mA maximum for all contacts. Subject to a simple harmonic motion having amplitude of 0.76mm (1.52mm maximum total excursion) in frequency between the limits of 10 and 55 Hz. The entire frequency range, from 10 to 55 Hz and return to 10 Hz, shall be traversed in approximately 1 minute. This motion shall be applied for 2 hours in each of three mutually perpendicular directions. (EIA-364-28 Condition I)
Shock (Mechanical)	1 μs Max.	Subject mated connectors to 50 G's (peak value) half-sine shock pulses of 11 milliseconds duration. Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). The electrical load condition shall be 100mA maximum for all contacts. (EIA-364-27, test condition A)

ENVIRONMENTAL

Item	Requirement	Standard
Resistance to Wave Soldering Heat	See Product Qualification and Test Sequence Group 10 (Lead Free)	Solder Temp. : 265±5°C, 10±0.5sec.
Resistance to Reflow Soldering Heat	See Product Qualification and Test Sequence Group 10 (Lead Free)	Pre Heat : 150°C~180°C, 60~120sec. Heat : 230°C Min., 40sec Min. Peak Temp. : 260°C Max, 10sec Max.
Thermal Shock	See Product Qualification and Test Sequence Group 4	Mate module and subject to follow condition for 5 cycles. 1 cycles: -55 +0/-3 °C, 30 minutes +85 +3/-0 °C, 30 minutes (EIA-364-32, test condition I)

TITLE: 0.5 MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: 2016/07/01

REVISION: G

ECN No: ECN-1607007

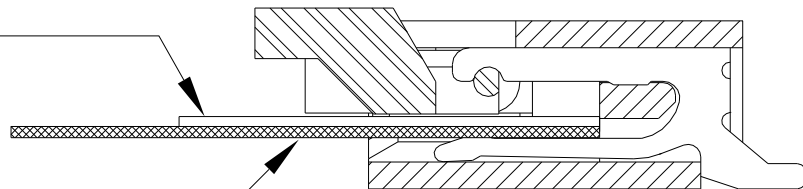
PAGE: 7 OF 11

Humidity	See Product Qualification and Test Sequence Group 4	Mated Connector 40°C, 90~95% RH, 96 hours. (EIA-364-31, Condition A, Method II)
Temperature life	See Product Qualification and Test Sequence Group 5	Subject mated connectors to temperature life at 85°C for 96 hours. (EIA-364-17, Test condition A)
Salt Spray (Only For Gold Plating)	See Product Qualification and Test Sequence Group 6	Subject mated/unmated connectors to 5% salt-solution concentration, 35°C (I) Gold flash for 8 hours (II) Gold plating 5 u" for 96 hours. (EIA-364-26)
Solder ability	Tin plating: Solder able area shall have minimum of 95% solder coverage. Gold plating: Solder able area shall have minimum of 75% solder coverage	And then into solder bath, Temperature at 245 ±5°C, for 4-5 sec. (EIA-364-52)
Hand Soldering Temperature Resistance	Appearance: No damage	T ≥ 350°C, 3sec at least.

Note. Flowing Mixed Gas shall be conduct by customer request.

SUPPORTING TAPE SIDE

補強板側

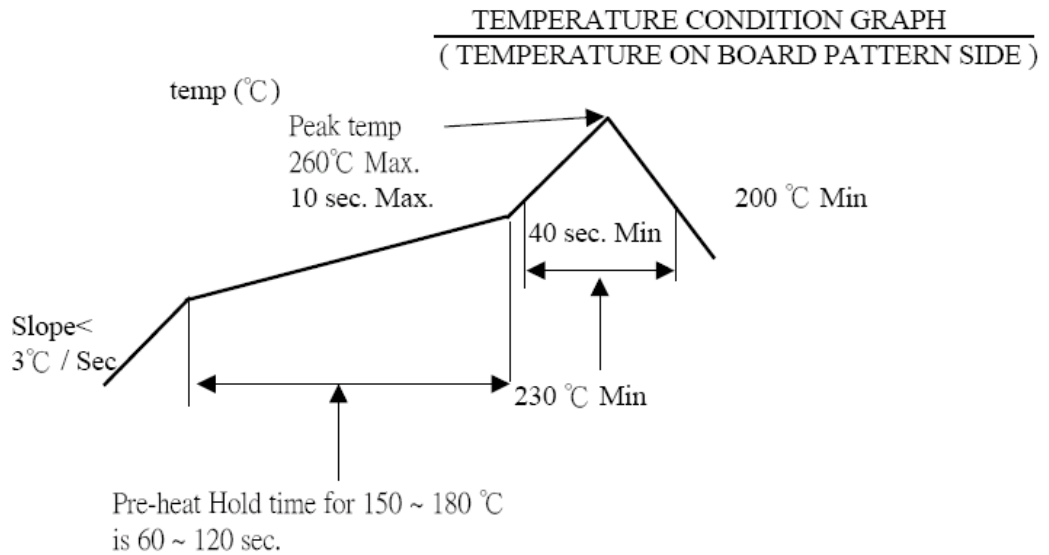


CONDUCTOR SIDE

導體露出側

6 INFRARED REFLOW CONDITION

6.1. General Process



TITLE: **0.5 MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE**

RELEASE DATE: **2016/07/01**

REVISION: **G**

ECN No: **ECN-1607007**

PAGE: **9** OF **11**

7 PRODUCT QUALIFICATION AND TEST SEQUENCE

Test or Examination	Test Group										
	1	2	3	4	5	6	7	8	9	10	11
	Test Sequence										
Examination of Product		1、4		1、7	1、6	1、4				1	1
Low-signal Level Contact Resistance		2、5	1、4	2、10	2、9	2、5				3	
Insulation Resistance				3、9	3、8						
Dielectric Withstanding Voltage				4、8	4、7						
Temperature rise	1										
Durability		3									
Contact Retention Force									2		
Vibration			2								
Shock (Mechanical)			3								
Thermal Shock				5							
Humidity				6							
Temperature life					5						
Salt Spray(Only For Gold Plating)						3					
Solder ability							1				
FPC Retention Force								1			
Fitting Nail /Housing Retention Force									1		
Resistance to Soldering Heat										2	
Hand Soldering Temperature Resistance											2
Sample Size	2	4	4	4	4	4	2	4	4	4	4

TITLE: **0.5 MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE**

RELEASE DATE: **2016/07/01**

REVISION: **G**


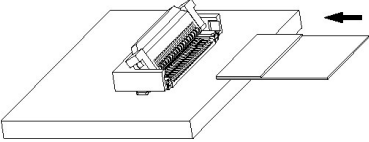



ECN No: **ECN-1607007**

PAGE: **10** OF **11**

8 FPC WITHDRAWAL FORCE

NO. OF Ckt.	Withdrawal Force (Min)	NO. OF Ckt.	Withdrawal Force (Min)		
4	0.7Kgf	31	1.5Kgf		
5		32			
6		33			
7		34			
8		35			
9		36			
10		37			
11		38			
12		39			
13		40			
14		41			
15		42			
16		43			
17		44			
18		45			
19		46			
20		1kgf		47	
21				48	
22				49	
23	50				
24	51				
25	52				
26	53				
27	54				
28	55				
29					
30					

9 INSTRUCTION UPON USAGE

Operation	Precautions
<p>FPC/FFC Termination procedure. Connector installed on the board.</p> <p>1) Lift up the actuator. Use thumb or index finger.</p>  <p>2) Do with the actuator opened completely, and insert it in the interior of the insertion entrance surely when you insert FPC/FFC. There are some insertion resistance because this connector has the FPC/FFC temporary retention mechanism.</p>  <p>3) Rotate down the actuator until firmly closed. It is critical that the inserted FPC/FFC is not moved and remains fully inserted. Should the FPC/FFC be moved, open the actuator and repeat the process, starting with Step 1 above.</p>  <p>FPC/FFC Removal</p> <p>1) Lift up the actuator. 2) Carefully remove the FPC/FFC.</p>	<p>1) Do when you pull out mating FPC/FFC with the Actuator opened completely. Confirm whether to Have adhered to the terminal contact part before FPC/FFC is mated with the connector housing when the opening of the actuator is the un-complete and FPC/FFC is pulled out.</p>  <p>2) Do not add the load mating FPC/FFC with connector housing.</p>  <p>3) Due to the structure of the connectors, they do not have string resistance to upward pulling; therefore, support the FPC/FFC when a pulling force is applied to it.</p>

TITLE: 0.5 MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: 2016/07/01

REVISION: G

ECN No: ECN-1607007

PAGE: 12 OF 11

