



## SPECIFICATION

宏致電子股份有限公司

桃園縣中壢市東園路13號

No.13, Dongyuan Rd., Jhongli City,

Taoyuan County 320, Taiwan (R.O.C.)

TEL: +886-3-463-2808

FAX: +886-3-463-1800

SPEC. NO.: PS-51335-xxxx-xxx REVISION: E

PRODUCT NAME: 1.25 mm PITCH WTB CONNECTOR

PRODUCT NO: 51335,51359, 51336 SERLES

PREPARED:  <b>LIMENGMENG</b>  DATE: <b>2023/08/09</b>	CHECKED:  <b>BRAVE</b>  DATE: <b>2023/08/09</b>	APPROVED:  <b>BRAVE</b>  DATE: <b>2023/08/09</b>
--	--	---



Aces P/N: **51335,51359,51336 series**

TITLE: **1.25 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/01/10

REVISION: D

ECN No: **ECN-013113**

PAGE: **2** OF **10**

1	REVISION HISTORY .....	3
2	SCOPE.....	4
3	APPLICABLE DOCUMENTS .....	4
4	REQUIREMENTS .....	4
5	PERFORMANCE .....	5
6	INFRARED REFLOW CONDITION.....	8
7	PRODUCT QUALIFICATION AND TEST SEQUENCE.....	9
8	MATING / UNMATING FORCE.....	10



Aces P/N: **51335,51359,51336 series**

TITLE: **1.25 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/01/10

REVISION: D

ECN No: **ECN-013113**

PAGE: **3** OF **10**

## 1 REVISION HISTORY

Rev.	ECN #	Revision Description	Prepared	Date
1	ECN-1607134	PROPOSAL	CHENYA	2016/05/30
O	ECN-1702159	OFFICIAL VERSION	CHENYA	2017/02/15
A	ECN-1706393	ADD 51359 SERIES	CHENYA	2017/05/19
B	ECN-2005146	ADD 51336 SERIES	JINTAO	2019/10/21
C	ECN-001948	ADD 14pin &6PIN MATING / UNMATING FORCE	YANJINXIU	2021/06/30
D	ECN-009832	ADD 8PIN MATING / UNMATING FORCE	YANJINXIU	2023/01/10
E	<b>ECN-013113</b>	<b>ADD 10PIN MATING / UNMATING FORCE</b>	<b>LIMENG</b>	<b>2023/08/09</b>



Aces P/N: **51335,51359,51336 series**

TITLE: **1.25 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/01/10

REVISION: D

ECN No: **ECN-013113**

PAGE: **4** OF **10**

## 2 SCOPE

This specification covers performance, tests and quality requirements for **1.25 mm pitch WTB connector**.

## 3 APPLICABLE DOCUMENTS

EIA-364: ELECTRONICS INDUSTRIES ASSOCIATION

## 4 REQUIREMENTS

### 4.1 Design and Construction

- 4.1.1 Product shall be of design, construction and physical dimensions specified on applicable product drawing.
- 4.1.2 All materials conform to R.o.H.S. and the standard depends on TQ-WI-140101.

### 4.2 Materials and Finish

- 4.2.1 Contact: High performance copper alloy.  
Finish: (a) Contact Area: [Refer to the drawing](#).  
(b) Under plate: [Refer to the drawing](#).  
(c) Solder area: [Refer to the drawing](#).
- 4.2.2 Housing: Thermoplastic or Thermoplastic High Temp., UL94V-0

### 4.3 Ratings

#### 4.3.1 Working Voltage Less than **36 Volts AC**

- 4.3.1 Voltage: **50 Volts AC** (per pin)
- 4.3.2 Current: **AWG#26: 1.5 Amperes** (per pin)  
**AWG#28: 1.5 Amperes** (per pin)  
**AWG#30: 1.0 Amperes** (per pin)
- 4.3.3 Operating Temperature : **-40°C to +85°C**

## 5 Performance

### 5.1. Test Requirements and Procedures Summary

Item	Requirement	Standard
Examination of Product	Product shall meet requirements of applicable product drawing and specification.	Visual, dimensional and functional per applicable quality inspection plan.
<b>ELECTRICAL</b>		
Item	Requirement	Standard
Low Level Contact Resistance	55 m Ω Max. per contact ΔR 20 m Ω Max.	Mate connectors, measure by dry circuit, 20mV Max., 100mA Max. (EIA-364-23)
Insulation Resistance	100 M Ω Min.	Unmated connectors, apply 500 V DC between adjacent terminals. (EIA-364-21)
Dielectric Withstanding Voltage	No discharge, flashover or breakdown. Current leakage: 1 mA max.	500V AC Min. at sea level for 1 minute. Test between adjacent contacts of unmated connectors. (EIA-364-20)
Temperature Rise	30°C Max. Change allowed	Mate connector: measure the temperature rise at rated current until temperature stable. The ambient condition is still air at 25°C (EIA-364-70,METHOD1,CONDITION1)
<b>MECHANICAL</b>		
Item	Requirement	Standard
Durability	30 cycles.	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of 25.4 ± 3mm/min.
Mating / Unmating Forces (Remove Lock)	Please see Item 8	Operation Speed : 25.4 ± 3 mm/minute.. Measure the force required to mate/unmate connector. (EIA-364-13)
Housing Lock Strength (Positive Lock)	2.0 Kgf MIN.	Mated Connectors,and apply axial pull out force at the speed rate of 25.4 ± 3 mm/minute.
Terminal /Housing Retention Force (Board Side)	0.25 Kgf MIN.	Apply axial pull out force at the speed rate of 25.4 ± 3 mm/minute. On the fitting nail assembled in the housing.



Aces P/N: **51335,51359,51336 series**

TITLE: **1.25 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/01/10

REVISION: D

ECN No: **ECN-013113**

PAGE: **6 OF 10**

Fitting Nail /Housing Retention Force (Board Side)	0.30 Kgf MIN.	Apply axial pull out force at the speed rate of 25.4 ± 3 mm/minute. On the terminal assembled in the housing.
Vibration	1 μs Max.	The electrical load condition shall be 100 mA maximum for all contacts. Subject to a simple harmonic motion having amplitude of 0.76mm (1.52mm maximum total excursion) in frequency between the limits of <b>10 and 55 Hz</b> . The entire frequency range, from <b>10 to 55 Hz</b> and return to <b>10 Hz</b> , shall be traversed in approximately 1 minute. This motion shall be applied for 2 hours in each of three mutually perpendicular directions. (EIA-364-28 Condition I)
Shock (Mechanical)	1 μs Max.	Subject mated connectors to <b>50 G's</b> (peak value) <b>half-sine</b> shock pulses of <b>11</b> milliseconds duration. Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). The electrical load condition shall be 100mA maximum for all contacts. (EIA-364-27, test condition A)

**ENVIRONMENTAL**

Item	Requirement	Standard
Resistance to <b>Wave</b> Soldering Heat (Board Side)	See Product Qualification and Test Sequence Group <b>9 (Lead Free)</b>	Solder Temp. : 265±5°C, 10±0.5sec.
Resistance to <b>Reflow</b> Soldering Heat (Board Side)	See Product Qualification and Test Sequence Group <b>9 (Lead Free)</b>	Pre Heat : 150°C~180°C, 60~120sec. Heat : 230°C Min., 40sec Min. Peak Temp. : 260°C Max, 10sec Max.
Thermal Shock	See Product Qualification and Test Sequence Group <b>4</b>	Mate module and subject to follow condition for 5 cycles. 1 cycles: <b>-40 +0/-3 °C</b> , 30 minutes <b>+85 +3/-0 °C</b> , 30 minutes (EIA-364-32, test condition I)



Aces P/N: **51335,51359,51336 series**

TITLE: **1.25 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/01/10

REVISION: D


ECN No: **ECN-013113**

PAGE: **7** OF **10**

Humidity	See Product Qualification and Test Sequence Group 4	Mated Connector 40°C+2/-2°C, 90~95% RH, 96 hours. (EIA-364-31, Condition A, Method II)
Temperature Life	See Product Qualification and Test Sequence Group 5	Subject mated connectors to temperature life at 85°C for 96 hours. (EIA-364-17, Test condition A)
Crimping Terminal / Housing Retention Force (Cable Side)	0.50kgf Min. per pin	Apply axial pull out force at the speed rate of 25.4 ± 3 mm/minute. On the terminal assembled in the housing.
Crimping Pull Out Force (Cable Side)	AWG #26: 0.70kgf Min. AWG #28: 0.50kgf Min. AWG #30: 0.30kgf Min.	Operation Speed : 25.4 ± 3 mm/minute. Fix the crimped terminal, apply axial pull out force on the wire.
Salt Spray (Only For Gold Plating)	See Product Qualification and Test Sequence Group 6	Subject mated/unmated connectors to 5% salt-solution concentration, 35°C (I) Gold plating < 3u" for 8 hours. (II) 3u" ≤ Gold plating < 5u" for 48 hours (III) Gold plating ≥ 5u" for 96 hours. (EIA-364-26)
Solder ability (Board Side)	Tin plating: Solder able area shall have minimum of 95% solder coverage. Gold plating: Solder able area shall have minimum of 75% solder coverage	And then into solder bath, Temperature at 245 ± 5°C, for 4-5 sec. (EIA-364-52)
Hand Soldering Temperature Resistance (Board Side)	Appearance: No damage	T ≥ 350°C, 3sec at least.

**Note.** Flowing Mixed Gas shall be conducted by customer request.

## 6 INFRARED REFLOW CONDITION

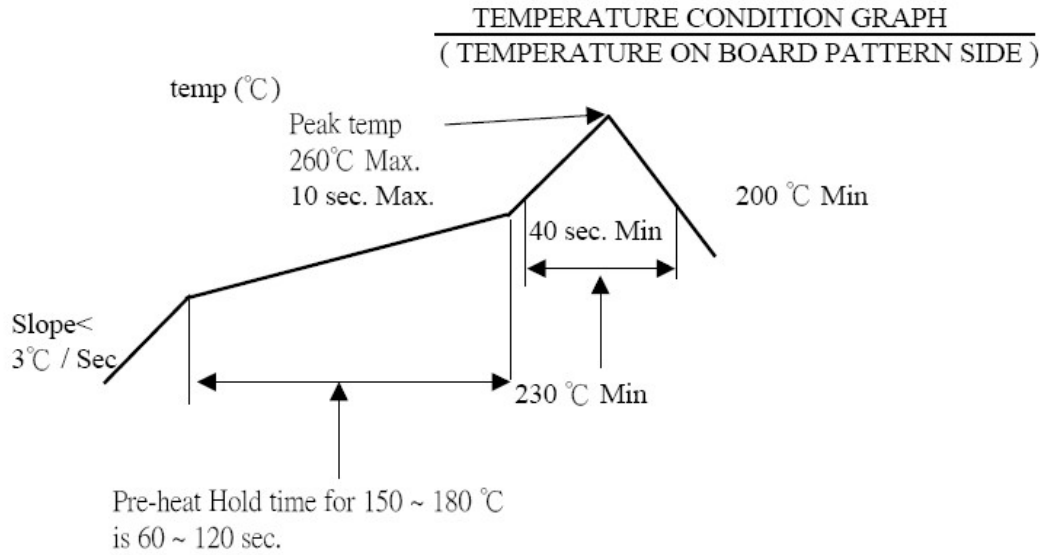





Aces P/N: **51335,51359,51336 series**

TITLE: **1.25 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/01/10

REVISION: D

ECN No: **ECN-013113**

PAGE: **9** OF **10**

## 7 PRODUCT QUALIFICATION AND TEST SEQUENCE

Test or Examination	Test Group										
	1	2	3	4	5	6	7	8	9	10	11
	Test Sequence										
Examination of Product				1、7	1、6	1、4				1	1
Low Level Contact Resistance		1、5	1、4	2、10	2、9	2、5				3	3
Insulation Resistance				3、9	3、8						
Dielectric Withstanding Voltage				4、8	4、7						
Temperature Rise	1										
Mating / Unmating Force		2、4									
Durability		3									
Contact Retention Force (Board Side)									1		
Vibration			2								
Shock (Mechanical)			3								
Thermal Shock				5							
Humidity				6							
Temperature Life					5						
Salt Spray (Only For Gold Plating)						3					
Solder ability (Board Side)							1				
Crimping Pull Out Force								1			
Resistance to Reflow Soldering Heat (Board Side)										2	2
Hand Soldering Temperature Resistance (Board Side)											
Sample Size	2	4	4	4	4	4	2	4	4	4	4

TITLE: **1.25 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/01/10

REVISION: D

ECN No: **ECN-013113**

PAGE: **10** OF **10**

## 8 MATING / UNMATING FORCE

Number of circuits	mating Force kgf. (MAX.)		Unmating Force kgf. (Min.)	
	1st	30th	1st	30th
006	2.88	3.59	0.18	0.18
008	3.84	4.48	0.24	0.24
010	4.80	5.42	0.30	0.30
012	5.76	6.72	0.36	0.36
014	6.72	7.65	0.42	0.42