



SPECIFICATION

宏致電子股份有限公司

桃園縣中壢市東園路13號

No.13, Dongyuan Rd., Zhongli City,

Taoyuan County 320, Taiwan (R.O.C.)

TEL: +886-3-463-2808

FAX: +886-3-463-1800

SPEC. NO.: PS-50458-XXXXX-XXX

REVISION: Q

PRODUCT NAME: 2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE

PRODUCT NO:

50458-SERIES, 50459-SERIES, 50477-SERIES
50498-SERIES, 50496-SERIES, 51245-SERIES
51338-SERIES, 51357-SERIES 51370-SERIES
51371-SERIES

PREPARED: XIUJIN DATE: 2019/11/20	CHECKED: BRAVE DATE: 2019/11/20	APPROVED: BRAVE DATE: 2019/11/20
--	--	---



TITLE: **2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE**

RELEASE DATE: 2019/11/20

REVISION: Q

ECN No: ECN-1911371

PAGE: **2** OF **15**

1	REVISION HISTORY.....	3
2	SCOPE	4
3	APPLICABLE DOCUMENTS.....	4
4	REQUIREMENTS	4
5	PERFORMANCE	5
6	INFRARED REFLOW CONDITION	8
7	PRODUCT QUALIFICATION AND TEST SEQUENCE.....	9
8	ANATOMY OF CRIMPING TERMINAL.....	10
9	APPLICABLE WIRES	11
10	CRIMPING CONDITION	11
11	CRIMPING HEIGHT MEASUREMENT.....	12
12	PULL FORCE OF CRIMPING SECTION MEASUREMENT.....	13
13	STANDARD INSULATION CRIMPING	13
14	CONDUCTORS CRIMPING CONDITION.....	14
15	CRIMPING REQUIREMENT.....	15
16	PRODUCT DISPENSING GLUE APPLICATION SPECIFICATION	16

TITLE: **2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE**

RELEASE DATE: 2019/11/20

REVISION: Q

ECN No: ECN-1911371

PAGE: **3** OF **15**

1 REVISION HISTORY

Rev.	ECN #	Revision Description	Prepared	Date
1	ECN-1104242	PROPOSAL	BINRU	2010/11/09
O	ECN-1105414	RELEASE	BINRU	2011/05/20
A	ECN-1108477	RELEASE	SKY	2011/08/20
B	ECN-1203324	ADD 50477 SERIES	SNOW	2012/03/16
C	ECN-1204211	ADD 50498,50496 SERIES	CHUNBO	2012/04/13
D	ECN-1209054	AWG#24: 3.5 Amperes (per pin) ADD AWG#26: 3.5 Amperes (per pin)	CHUNBO	2012/09/05
E	ECN-1304128	APD1020172 51245 SERIES	JIANZHONG	2013/12/20
F	ECN-1401240	UPDATE WORKING VOLTAGE	XUFEI	2014/02/13
G	ECN-1404149	AWG#24: 3.5 Amperes (per pin) ADD AWG#26: 3.5 Amperes (per pin)	JIANZHONG	2014/04/09
H	ECN-1405232	ADD Durability for inspection process usage (only for wafer side)	BRUCE	2014/05/14
J	ECN-1511319	Update GROUP 9	JUGG	2015/10/07
K	ECN-1607277	ADD 51338 SERIES	XIUJIN	2016/07/11
L	ECN-1609196	Update Current	JUGG	2016/09/14
M	ECN-1705303	ADD 51357 SERIES, ADD Fitting Nail retention force	XIUJIN	2017/03/07
N	ECN-1712490	ADD 51370 SERIES & 51371 SERIES ADD. Mating Force: 2.5 Kgf Max. Unmating Force: 0.8 Kgf Min	ZHANGHAO	2017/12/29
P	ECN-1808345	ADD Salt Spray standard	HUYANG	2018/08/16
Q	ECN-XXXXX	ADD is pensing glue instructions and update crimping requirement	JIANGXIUJIN	2019/10/16

TITLE: **2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE**

RELEASE DATE: 2019/11/20

REVISION: Q

ECN No: ECN-1911371

PAGE: **4** OF **15**

2 SCOPE

This specification covers performance, tests and quality requirements for **2.0 mm pitch WTB connector**.

3 APPLICABLE DOCUMENTS

EIA-364: ELECTRONICS INDUSTRIES ASSOCIATION

4 REQUIREMENTS

4.1 Design and Construction

4.1.1 Product shall be of design, construction and physical dimensions specified on applicable product drawing.

4.1.2 All materials conform to R.o.H.S. and the standard depends on TQ-WI-140101.

4.2 Materials and Finish

4.2.1 Contact: High performance copper alloy.
Finish: (a) Contact Area: [Refer to the drawing.](#)
(b) Under plate: [Refer to the drawing.](#)
(c) Solder area: [Refer to the drawing.](#)

4.2.2 Housing: Thermoplastic or Thermoplastic High Temp., UL94V-0

4.2.3 Shell: [Nickel Silver Alloy.](#)

4.3 Ratings

4.3.1 [Working voltage less than 36 volts \(per pin\)](#)

4.3.2 [Voltage: 50 Volts AC \(per pin\)](#)

4.3.3 Current:


[AWG #24, 3.5 A\(Over 2 circuits shall be conduct by customer request\)](#)

[AWG #26, 3.5 A\(Over 2 circuits shall be conduct by customer request\)](#)

[AWG #28, 3.0 A\(Over 2 circuits shall be conduct by customer request\)](#)

4.3.4 [Operating Temperature : -40°C to +80°C](#)

[Temperature rise test:](#)

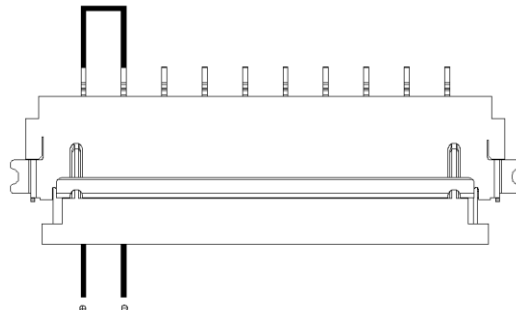

TITLE: **2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE**

RELEASE DATE: 2019/11/20

REVISION: Q

ECN No: ECN-1911371

PAGE: **5** OF **15**

5 Performance

5.1. Test Requirements and Procedures Summary

Item	Requirement	Standard
Examination of Product	Product shall meet requirements of applicable product drawing and specification.	Visual, dimensional and functional per applicable quality inspection plan.
ELECTRICAL		
Item	Requirement	Standard
Low Level Contact Resistance	20 m Ω Max.(initial)per contact ΔR 20 m Ω Max.	Mate connectors, measure by dry circuit, 20mV Max., 100mA Max. (EIA-364-23)
Insulation Resistance	500 M Ω Min.	Unmated connectors, apply 500 V DC between adjacent terminals. (EIA-364-21)
Dielectric Withstanding Voltage	No discharge, flashover or breakdown. Current leakage: 1 mA Max.	300V AC Min. at sea level for 1 minute. Test between adjacent contacts of unmated connectors. (EIA-364-20)
Temperature Rise	30°C Max. Change allowed	Mate connector: measure the temperature rise at rated current until temperature stable. The ambient condition is still air at 25°C (EIA-364-70,METHOD1,CONDITION2)
MECHANICAL		
Item	Requirement	Standard
Durability	30 cycles.	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of 25.4 \pm 3mm/min.
Durability for inspection process usage (only for wafer side)	Recommended to replace a new wafer after 2000 cycles usage	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of 25.4 \pm 3mm/min. (The test is only for reference)
Mating / Unmating Forces	Mating Force: 2.0 Kgf Max. Unmating Force: 0.5 Kgf Min. Mating Force: 2.5 Kgf Max. Unmating Force: 0.8 Kgf Min. (For 51370 series &51371 series)	Operation Speed : 25.4 \pm 3 mm/minute.. Measure the force required to mate/unmated connector. (EIA-364-13)
Contact Retention Force (Board Side)	0.30 Kgf Min.	Operation Speed : 25.4 \pm 3 mm/minute. Measure the contact retention force

TITLE: **2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE**

RELEASE DATE: 2019/11/20

REVISION: Q

ECN No: ECN-1911371

PAGE: **6** OF **15**

		with tester.
Shell & Fitting Nail/Housing Retention Force	0.20 Kgf Min.	Apply axial pull out force at the speed rate of 25.4 ± 3 mm/minute. On the fitting nail assembled in the housing.
Crimping Terminal / Housing Retention Force (Cable Side)	0.8 Kgf Min. per pin	Apply axial pull out force at the speed rate of 25.4 ± 3 mm/minute. On the terminal assembled in the housing.
Crimping Pull Out Force	AWG# 24: 2.0Kgf Min. AWG# 26: 1.0Kgf Min. AWG# 28: 1.0Kgf Min.	Operation Speed : 25.4 ± 3 mm/minute. Fix the crimped terminal, apply axial pull out force on the wire.
Vibration	1 μs Max.	The electrical load condition shall be 100 mA maximum for all contacts. Subject to a simple harmonic motion having amplitude of 0.76mm (1.52mm maximum total excursion) in frequency between the limits of 10 and 55 Hz. The entire frequency range, from 10 to 55 Hz and return to 10 Hz, shall be traversed in approximately 1 minute. This motion shall be applied for 2 hours in each of three mutually perpendicular directions. (EIA-364-28 Condition I)
Shock (Mechanical)	1 μs Max.	Subject mated connectors to 50 G's (peak value) half-sine shock pulses of 11 milliseconds duration. Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). The electrical load condition shall be 100mA maximum for all contacts. (EIA-364-27, test condition A)

ENVIRONMENTAL

Item	Requirement	Standard
Resistance to Reflow Soldering Heat (Board Side)	See Product Qualification and Test Sequence Group 10 (Lead Free)	Pre Heat : 150°C ~180°C, 60~120sec. Heat : 230°C Min., 40sec Min. Peak Temp. : 260°C Max, 10sec Max. Reflow number cycle: 2 times (EIA-364-56)

TITLE: **2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE**

RELEASE DATE: 2019/11/20

REVISION: Q


ECN No: ECN-1911371

PAGE: **7** OF **15**

Thermal Shock	See Product Qualification and Test Sequence Group 4	Mate module and subject to follow condition for 5 cycles. 1 cycles: -55 +0/-3 °C , 30 minutes +85 +3/-0 °C , 30 minutes (EIA-364-32, test condition I)
Humidity	See Product Qualification and Test Sequence Group 4	Mated Connector 40°C, 90-95% RH, 96 hours. (EIA-364-31,Condition A, Method II)
Temperature Life	See Product Qualification and Test Sequence Group 5	Subject mated connectors to temperature life at 85°C for 96 hours . (EIA-364-17, Test condition A)
Salt Spray (Only For Gold Plating)	See Product Qualification and Test Sequence Group 6	Subject mated/unmated connectors to 5% salt-solution concentration, 35°C (I) Gold flash for 8 hours (II) Gold plating 3u" for 48hours. (III) Gold plating 5 u" (Min)for 96hours. (EIA-364-26)
Solder ability (Board Side)	Tin plating: Solder able area shall have minimum of 95% solder coverage. Gold plating: Solder able area shall have minimum of 75% solder coverage	And then into solder bath, Temperature at 245 ±5°C , for 4-5 sec . (EIA-364-52)
Hand Soldering Temperature Resistance (Board Side)	Appearance: No damage	T ≥ 350°C, 3 sec at least.

Note. Flowing Mixed Gas shall be conduct by customer request.

6 INFRARED REFLOW CONDITION

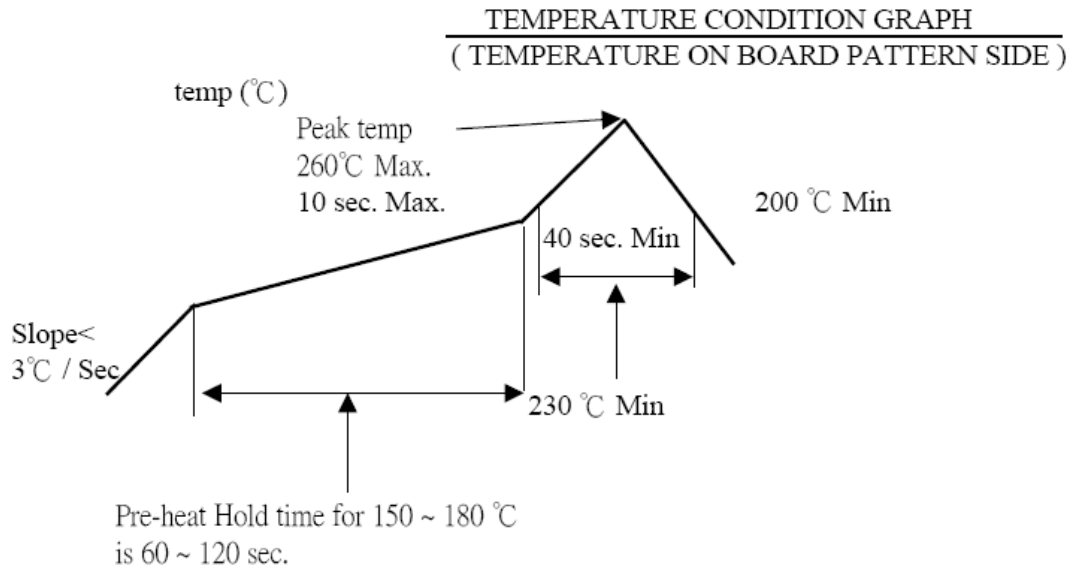

TITLE: **2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE**

RELEASE DATE: 2019/11/20

REVISION: Q

ECN No: ECN-1911371

PAGE: **9** OF **15**

7 PRODUCT QUALIFICATION AND TEST SEQUENCE

Test or Examination	Test Group										
	1	2	3	4	5	6	7	8	9	10	11
	Test Sequence										
Examination of Product				1、7	1、6	1、4				1	1
Low Level Contact Resistance		1、5	1、4	2、10	2、9	2、5				3	
Insulation Resistance				3、9	3、8						
Dielectric Withstanding Voltage				4、8	4、7						
Temperature Rise	1										
Mating / Unmating Force		2、4									
Durability		3									
Contact Retention Force (Board Side)									3		
Vibration			2								
Shock (Mechanical)			3								
Thermal Shock				5							
Humidity				6							
Temperature Life					5						
Salt Spray(Only For Gold Plating)						3					
Solder ability							1				
Crimping Pull Out Force								1			
Crimping Terminal / Housing Retention Force (Cable Side)									1		
Shell /Housing Retention Force									2		
Resistance to Soldering Heat (Board Side)										2	
Hand Soldering Temperature Resistance (Board Side)											2
Sample Size	2	4	4	4	4	4	2	4	4	4	4

TITLE: **2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE**

RELEASE DATE: 2019/11/20


REVISION: Q

ECN No: ECN-1911371


PAGE: **10** OF **15**

8 ANATOMY OF CRIMPING TERMINAL

50459-Txxx-xxx

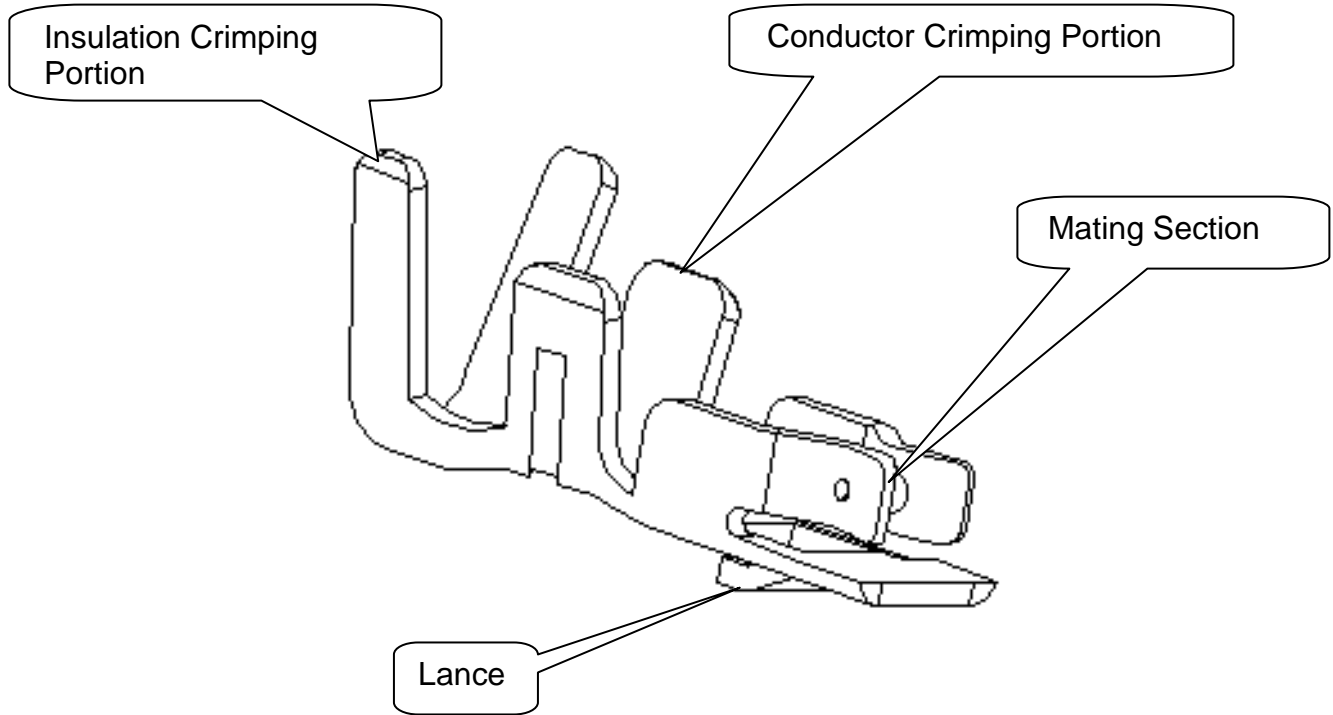

51338-Txxx-xxx

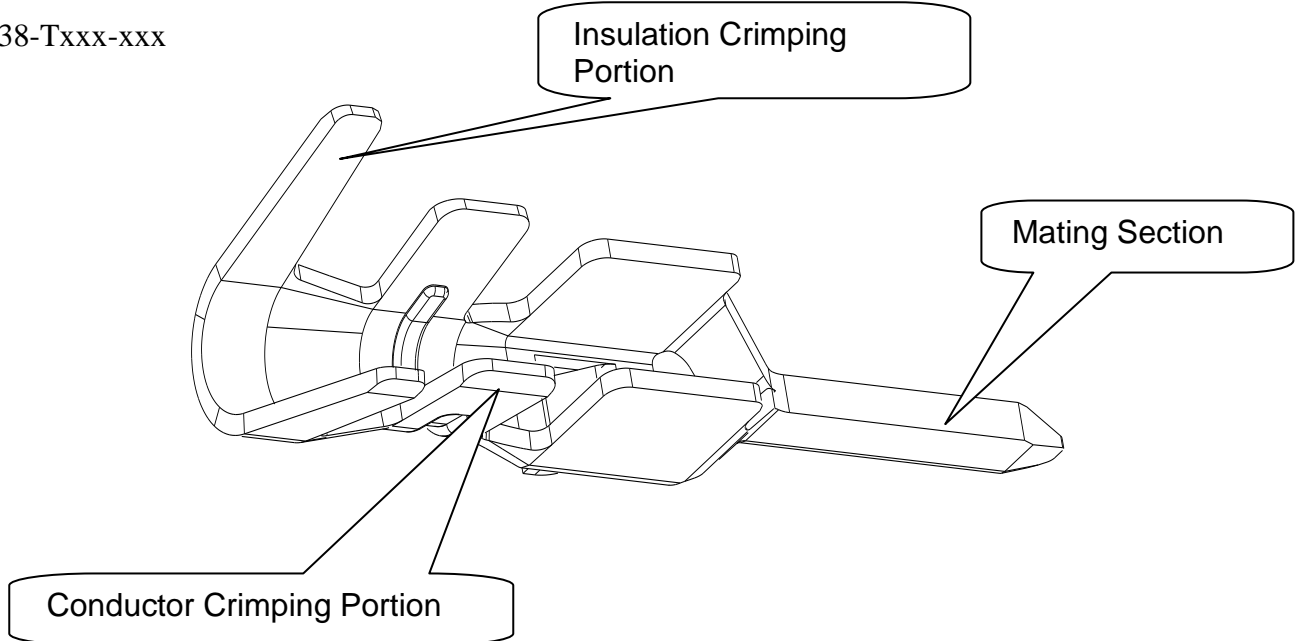

TITLE: **2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE**

RELEASE DATE: 2019/11/20

REVISION: Q

ECN No: ECN-1911371

PAGE: **11** OF **15**


9 APPLICABLE WIRES: UL10368 UL3302 ETFE WIRE

AWG Size: AWG#24, AWG#26, AWG#28

Insulation OD: Φ 1.1mm, Φ 1.0mm, Φ 0.90mm

10 CRIMPING CONDITION





鉚線條件表 CRIMPING CONDITION							
Part Number	Wire Specification			Crimp Height (mm)		Crimp Width (mm)	
	UL Style (REF.)	AWG Size	Insulation OD(mm)	Conductor A	Insulation B	Conductor W1	Insulation W2
50459-T 51338-T	UL3302	24	1.1	0.65~0.78	1.25~1.30	1.3Max.	1.45Max.
	UL3302	26	1.0	0.62~0.68	1.20~1.25	1.3Max.	1.45Max.
	UL10368	28	0.90	0.55~0.65	1.20~1.25	1.3Max.	1.45Max.

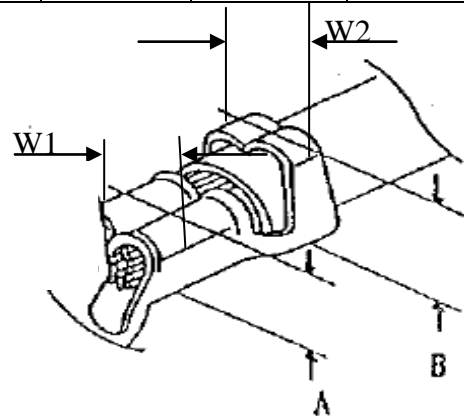

Note:

- 1、W1為芯線導體鉚壓後之寬度(Conductor Crimping Width)：W1值如上表
- 2、W2為電線外被部分鉚壓後之寬度(Insulation Crimping Width)：W2值如上表
- 3、A為芯線導體鉚壓後之高度(Conductor Crimping height)：A值如上表(參考值)
- 4、B為電線外被鉚壓後之高度(Insulation Crimping height)：B值如上表(參考值)
- 5、電線剝皮長度(Strip length)：1.5~1.9mm(參考值)

11 CRIMPING HEIGHT MEASUREMENT

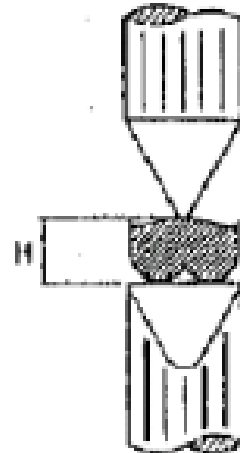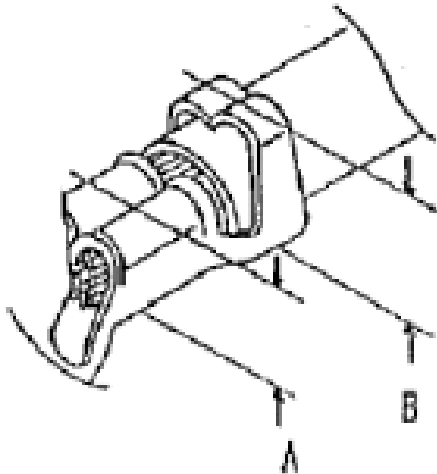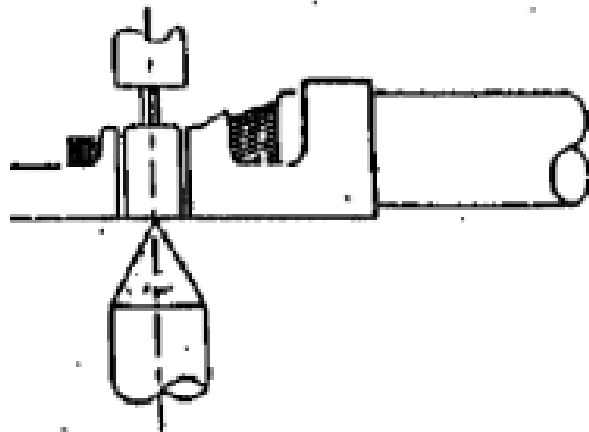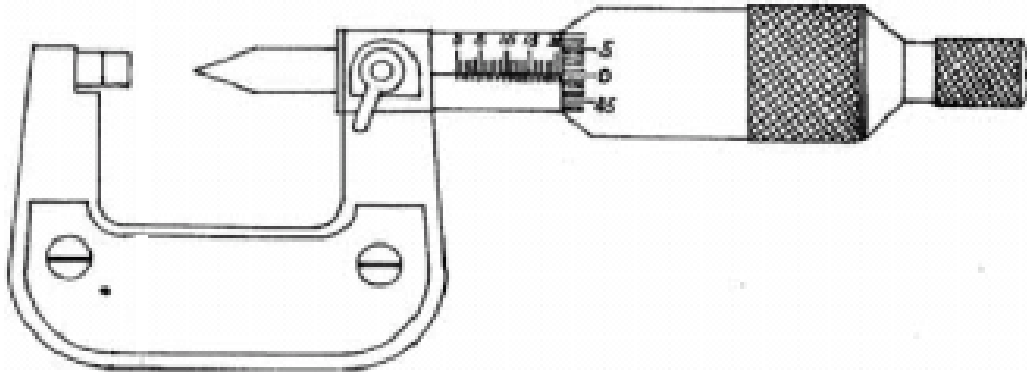

TITLE: **2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE**

RELEASE DATE: 2019/11/20

REVISION: Q

ECN No: ECN-1911371

PAGE: **13** OF **15**

12 PULL FORCE OF CRIMPING SECTION MEASUREMENT




Before test samples, please measure crimp height and do not crimp insulation.




Pull Force of Crimp Section Measurement


13 STANDARD INSULATION CRIMPING

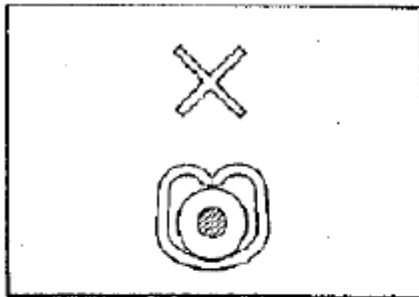


Not enough crimp

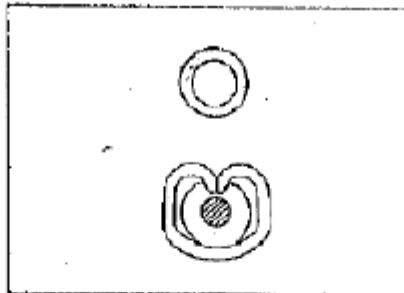


Good

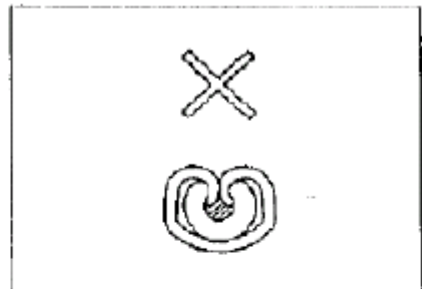

Crimp too much




Good






NG

Insulation Crimp Condition




As following figure shown. It is no problem if wire bent up down 90 degrees 1 cycle and insulation position still in ideal position.


14 CONDUCTORS CRIMPING CONDITION

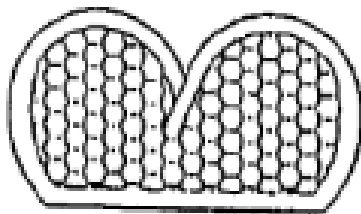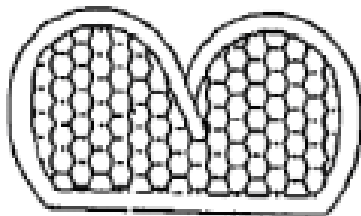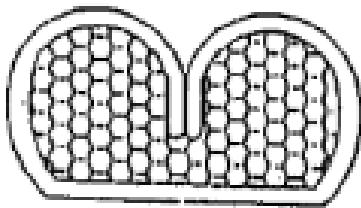

Lower conduct
retension force



Good



Large burr

NG

TITLE: **2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE**


RELEASE DATE: 2019/11/20

REVISION: Q

ECN No: ECN-1911371

PAGE: **15** OF **15**

15 CRIMPING REQUIREMENT

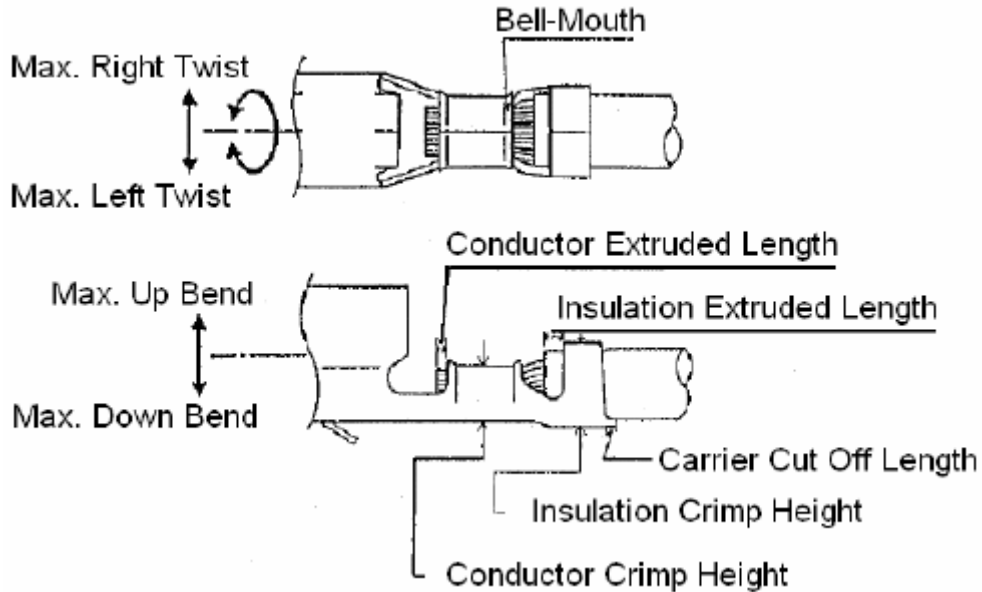

Item	Range(Ref.)
Max. Up Bend	1°max
Max. Down Bend	1°max
Max. Left Twist	1°max
Max. Right Twist	1°max
Bell-Mouth Length	0.1~0.3mm
Carrier Cut Off Length	0~0.2mm
Conductor Extruded Length	0.05~0.2mm
Insulation Extruded Length	0.25~0.50mm

TITLE: **2.0 mm PITCH WTB CONNECTOR SMT R/A TYPE**

RELEASE DATE: 2019/11/20

REVISION: Q

ECN No: ECN-1911371


PAGE: **16** OF **15**

16 PRODUCT DISPENSING GLUE APPLICATION SPECIFICATION


In the application, if the terminal insertion housing is required to be fixed by glue at the end of the terminal, It is recommended to apply glue according to the way of putting profiling tools into the end of the cable for fixation, prevent a abnormal insertion and extraction of wafer and cable due to the skewness of the terminal when the glue is fixed;

The fixing method of cable end glue is as follows:

- 1.Prepare similar profiling tools ;

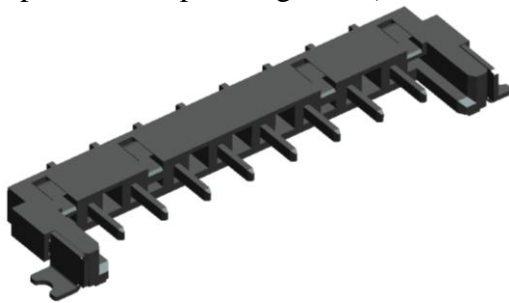

2. Insert profiling tool to fixed the cable;

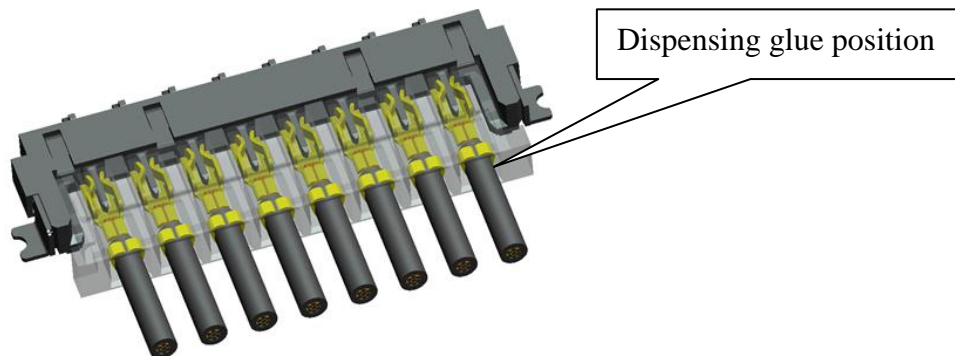

3. Glue dispensing shall be carried out at the end of the terminal at the wire end, and the glue dispensing shall be completed by pulling out cable the from the profiling tool;

