



## SPECIFICATION

宏致電子股份有限公司

桃園縣中壢市東園路13號

No.13, Dongyuan Rd., Jhongli City,

Taoyuan County 320, Taiwan (R.O.C.)

TEL: +886-3-463-2808

FAX: +886-3-463-1800

SPEC. NO.: PS-51445-xxxxx-xxx REVISION: C

PRODUCT NAME: 1.0 mm PITCH WTB CONNECTOR

PRODUCT NO: 51445 ,51446 ,52333, 52371SERIES

PREPARED:  <b>GAOLI</b>  DATE: <b>2023/11/09</b>	CHECKED:  <b>XUZHIYONG</b>  DATE: <b>2023/11/09</b>	APPROVED:  <b>XUZHIYONG</b>  DATE: <b>2023/11/09</b>
---	--	---



Aces P/N: **51445,51446,52333,52371** series

TITLE: **1.0 mm PITCH WTB CONNECTOR**

RELEASE DATE: **2023/11/09**

REVISION: **C**

ECN No: ECN-012214

PAGE: **2** OF **15.**

1	REVISION HISTORY .....	3
2	SCOPE.....	4
3	APPLICABLE DOCUMENTS .....	4
4	REQUIREMENTS .....	4
5	PERFORMANCE .....	5
6	INFRARED REFLOW CONDITION.....	8
7	PRODUCT QUALIFICATION AND TEST SEQUENCE.....	9
8	MATING / UNMATING FORCE.....	10



Aces P/N: **51445,51446,52333,52371 series**

TITLE: **1.0 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/11/09

REVISION: C

ECN No: ECN-012214

PAGE: **3** OF **15.**

## 1 REVISION HISTORY

Rev.	ECN #	Revision Description	Prepared	Date
A	ECN-2005576	NEW SPEC	JINTAO	2019/06/02
B	ECN-002172	Add 24 & 40 & 50PIN 插拔規格及 51446 系列	YINGHONG	2022/07/20
C	ECN-012214	Add 52333 series	GAOLI	2023/11/09
		Add 16 & 30 PIN Add 52371 series		

TITLE: **1.0 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/11/09

REVISION: C

ECN No: ECN-012214

PAGE: **4** OF **15**.

## 2 SCOPE

This specification covers performance, tests and quality requirements for **1.0 mm pitch WTB connector**.

## 3 APPLICABLE DOCUMENTS

EIA-364: ELECTRONICS INDUSTRIES ASSOCIATION

## 4 REQUIREMENTS

### 4.1 Design and Construction

- 4.1.1 Product shall be of design, construction and physical dimensions specified on applicable product drawing.
- 4.1.2 All materials conform to R.o.H.S. and the standard depends on TQ-WI-140101.

### 4.2 Materials and Finish

- 4.2.1 Contact: High performance copper alloy.  
Finish: (a) Contact Area: **Refer to the drawing.**  
(b) Under plate: **Refer to the drawing.**  
(c) Solder area: **Refer to the drawing.**
- 4.2.2 Housing: Thermoplastic or Thermoplastic High Temp., UL94V-0

### 4.3 Ratings

#### 4.3.1 Working Voltage Less than **36 Volts AC**

- 4.3.1 Voltage: **50 Volts AC** (per pin)
- 4.3.2 Current: **AWG#28: 1.0 Amperes** (per pin)  
**AWG#30: 1.0 Amperes** (per pin)  
**AWG#32: 0.8 Amperes** (per pin)  
**AWG#33: 0.2 Amperes** (per pin)
- 4.3.3 Operating Temperature : **-40°C to +85°C**

TITLE: **1.0 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/11/09

REVISION: C

ECN No: ECN-012214

PAGE: **5** OF **15.**

## 5 Performance

### 5.1. Test Requirements and Procedures Summary

Item	Requirement	Standard
Examination of Product	Product shall meet requirements of applicable product drawing and specification.	Visual, dimensional and functional per applicable quality inspection plan.
<b>ELECTRICAL</b>		
Item	Requirement	Standard
Low Level Contact Resistance	55 m $\Omega$ Max. per contact $\Delta R$ 20 m $\Omega$ Max.	Mate connectors, measure by dry circuit, 20mV Max., 100mA Max. (EIA-364-23)
Insulation Resistance	100 M $\Omega$ Min.	Unmated connectors, apply 500 V DC between adjacent terminals. (EIA-364-21)
Dielectric Withstanding Voltage	No discharge, flashover or breakdown. Current leakage: 1 mA max.	500V AC Min. at sea level for 1 minute. Test between adjacent contacts of unmated connectors. (EIA-364-20)
Temperature Rise	30°C Max. Change allowed	Mate connector: measure the temperature rise at rated current until temperature stable. The ambient condition is still air at 25°C (EIA-364-70,METHOD1,CONDITION1)
<b>MECHANICAL</b>		
Item	Requirement	Standard
Durability	30 cycles.	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of 25.4 $\pm$ 3mm/min.
Mating / Unmating Forces (Remove Lock)	Please see Item 8	Operation Speed : 25.4 $\pm$ 3 mm/minute.. Measure the force required to mate/unmate connector. (EIA-364-13)
Housing Lock Strength (Positive Lock)	2.0 Kgf MIN.	Mated Connectors,and apply axial pull out force at the speed rate of 25.4 $\pm$ 3 mm/minute.
Terminal /Housing Retention Force (Board Side)	0.15 Kgf MIN.	Apply axial pull out force at the speed rate of 25.4 $\pm$ 3 mm/minute. On the fitting nail assembled in the housing.



Aces P/N: **51445,51446,52333,52371** series

TITLE: **1.0 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/11/09

REVISION: C

ECN No: ECN-012214

PAGE: **6** OF **15.**

Fitting Nail /Housing Retention Force (Board Side)	0.15 Kgf MIN.	Apply axial pull out force at the speed rate of 25.4 ± 3 mm/minute. On the terminal assembled in the housing.
Crimping Terminal / Housing Retention Force (Cable Side)	0.50kgf Min. per pin	Apply axial pull out force at the speed rate of 25.4 ± 3 mm/minute. On the terminal assembled in the housing.
Crimping Pull Out Force (Cable Side)	AWG #28: 0.70kgf Min. AWG #30: 0.50kgf Min. <b>AWG #32: 0.30kgf Min.</b> <b>AWG #33: 0.30kgf Min.</b>	Operation Speed : 25.4 ± 3 mm/minute. Fix the crimped terminal, apply axial pull out force on the wire.
Shock (Mechanical)	1 µs Max.	Subject mated connectors to <b>50 G's</b> (peak value) <b>half-sine</b> shock pulses of <b>11</b> milliseconds duration. Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). The electrical load condition shall be 100mA maximum for all contacts. (EIA-364-27, test condition A)
Vibration	1 µs Max.	<b>The electrical load condition shall be 100 mA maximum for all contacts. Subject to a simple harmonic motion having amplitude of 0.76mm (1.52mm maximum total excursion) in frequency between the limits of 10 and 55 Hz. The entire frequency range, from 10 to 55 Hz and return to 10 Hz, shall be traversed in approximately 1 minute. This motion shall be applied for 2 hours in each of three mutually perpendicular directions. (EIA-364-28 Condition I)</b>

**ENVIRONMENTAL**

Item	Requirement	Standard
Resistance to Reflow Soldering Heat (Board Side)	See Product Qualification and Test Sequence Group <b>9 (Lead Free)</b>	Pre Heat : 150°C~180°C, 60~120sec. Heat : 230°C Min., 40sec Min. Peak Temp. : 260°C Max, 10sec Max.



Aces P/N: **51445,51446,52333,52371 series**

TITLE: **1.0 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/11/09

REVISION: C

ECN No: ECN-012214


PAGE: **7** OF **15.**

Thermal Shock	See Product Qualification and Test Sequence Group 4	Mate module and subject to follow condition for 5 cycles. 1 cycles: -40 +0/-3 °C, 30 minutes +85 +3/-0 °C, 30 minutes (EIA-364-32, test condition I)
Humidity	See Product Qualification and Test Sequence Group 4	Mated Connector 40°C+2/ -2°C, 90~95% RH, 96 hours. (EIA-364-31,Condition A, Method II)
Temperature Life	See Product Qualification and Test Sequence Group 5	Subject mated connectors to temperature life at 85°C for 96 hours. (EIA-364-17, Test condition A)
Salt Spray (Only For Gold Plating)	See Product Qualification and Test Sequence Group 6	Subject mated/unmated connectors to 5% salt-solution concentration, 35°C (I) Gold plating <3u" for 8 hours. (II) 3u"≤Gold plating<5u" for 48 hours (III) Gold plating≥5u" for 96 hours. (EIA-364-26)
Solder ability (Board Side)	Tin plating: Solder able area shall have minimum of 95% solder coverage. Gold plating: Solder able area shall have minimum of 75% solder coverage	And then into solder bath, Temperature at 245 ±5°C, for 4-5 sec. (EIA-364-52)
Hand Soldering Temperature Resistance (Board Side)	Appearance: No damage	T ≥ 350°C, 3sec at least.

**Note.** Flowing Mixed Gas shall be conduct by customer request.

## 6 INFRARED REFLOW CONDITION

TEMPERATURE CONDITION GRAPH  
( TEMPERATURE ON BOARD PATTERN SIDE )

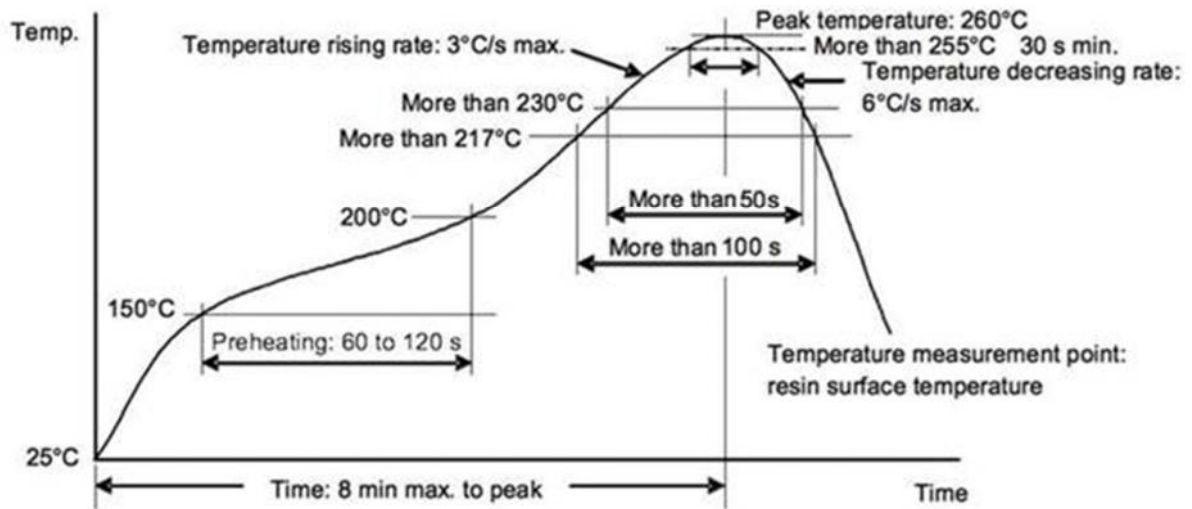





Aces P/N: **51445,51446,52333,52371** series

TITLE: **1.0 mm PITCH WTB CONNECTOR**

RELEASE DATE: 2023/11/09

REVISION: C

ECN No: ECN-012214

PAGE: 9 OF 15.

## 7 PRODUCT QUALIFICATION AND TEST SEQUENCE

Test or Examination	Test Group									
	1	2	3	4	5	6	7	8	9	10
	Test Sequence									
Examination of Product	1、3	1、7	1、6	1、7	1、6	1、4	1、3	1	1、4	1、3
Low Level Contact Resistance		2、6	2、5	2、10	2、9	2、5			3	
Insulation Resistance				3、9	3、8					
Dielectric Withstanding Voltage				4、8	4、7					
Temperature Rise	2									
Crimping Terminal / Housing Retention Force(Cable Side)								5		
Crimping Pull Out Force (Cable Side)								4		
Mating / Unmating Force		3、5								
Durability		4								
Contact Retention Force (Board Side)								3		
Vibration			3							
Shock (Mechanical)			4							
Thermal Shock				5						
Humidity				6						
Temperature Life					5					
Salt Spray (Only For Gold Plating)						3				
Solder ability (Board Side)							2			
Fitting Nail /Housing Retention Force								2		
Resistance to Soldering Heat (Board Side)									2	
Hand Soldering Temperature Resistance (Board Side)										2
<b>Sample Size</b>	<b>2</b>	<b>4</b>	<b>4</b>	<b>4</b>	<b>4</b>	<b>4</b>	<b>2</b>	<b>4</b>	<b>4</b>	<b>4</b>



Aces P/N: **51445,51446,52333,52371** series

TITLE: 1.0 mm PITCH WTB CONNECTOR

RELEASE DATE: 2023/11/09

REVISION: C

ECN No: ECN-012214

PAGE: 10 OF 15.


## 8 MATING / UNMATING FORCE

Number of circuits	mating Force kgf. (MAX.)		Unmating Force kgf. (Min.)	
	1st	30th	1st	30th
016	3.0	3.0	0.30	0.30
020	3.0	3.0	0.35	0.35
024	3.6	3.6	0.40	0.40
030	4.5	4.5	0.50	0.50
036	5.5	4.5	0.60	0.60
040	6.0	6.0	0.70	0.70
050	7.5	7.5	0.85	0.85


## 9 CRIMPING CONDITION

### 鉚線條件表 CRIMPING CONDITION

Part Number	Wire Specification			Crimp Height (mm)		Crimp Width (mm)	
	UL Style (REF.)	AWG Size	Insulation OD(mm)	Conductor A	Insulation B	Conductor W1	Insulation W2
51446-Txxx	UL1571	28	0.80	0.40~0.50	1.10~1.20	0.70~0.80	0.85~0.95
51446-Txxx	UL1571	30	0.60	0.40~0.50	0.85~0.95	0.70~0.80	0.75~0.85
51446-Txxx	UL1571	32	0.42	0.40~0.50	0.70~0.85	0.70~0.80	0.80max
52333-T5xx	UL10064	30	0.50	0.36~0.48	0.70~0.80	0.70~0.80	0.80max
52333-T5xx	UL10064	32	0.42	0.35~0.44	0.65~0.80	0.70~0.80	0.80max
52333-T5xx	UL10064	33	0.34	0.31~0.39	0.65~0.80	0.70~0.80	0.80max

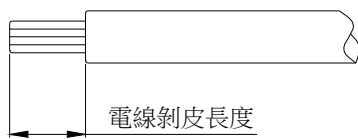

Strip length

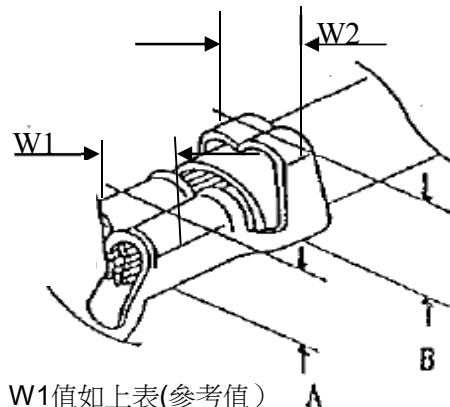

Note:

- 1、W1為芯線導體鉚壓後之寬度(Conductor Crimping Width)：W1值如上表(參考值)
- 2、W2為電線外被部分鉚壓後之寬度(Insulation Crimping Width)：W2值如上表(參考值)
- 3、A為芯線導體鉚壓後之高度(Conductor Crimping height)：A值如上表(參考值)
- 4、B為電線外被鉚壓後之高度(Insulation Crimping height)：B值如上表(參考值)
- 5、電線剝皮長度(Strip length)：0.7~1.0mm(參考值)

TITLE: 1.0 mm PITCH WTB CONNECTOR





RELEASE DATE: 2023/11/09

REVISION: C

ECN No: ECN-012214

PAGE: 12 OF 15.

### 10 CRIMPING HEIGHT MEASUREMENT

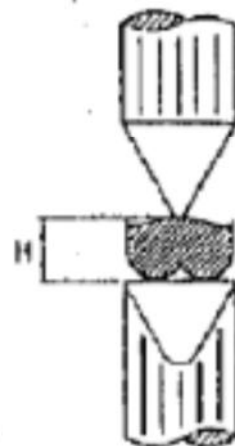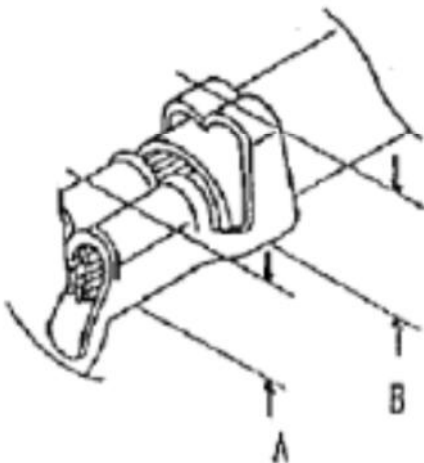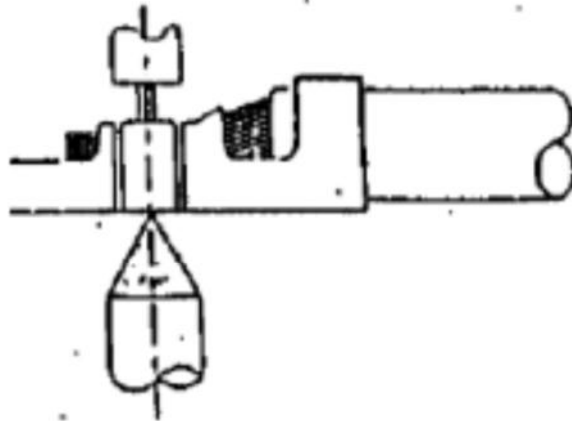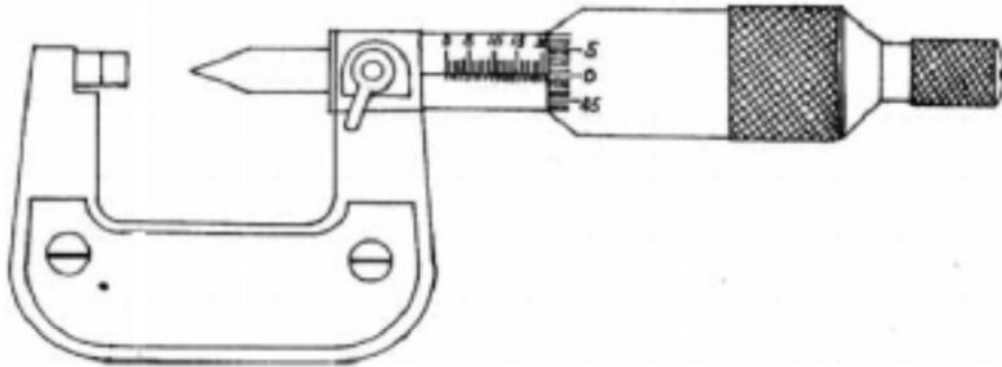

### 11 PULL FORCE OF CRIMPING SECTION MEASUREMENT




Before test samples, please measure crimp height and do not crimp insulation.




Pull Force of Crimp Section Measurement


### 12 STANDARD INSULATION CRIMPING

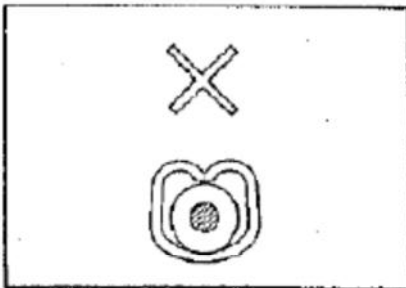


Not enough crimp

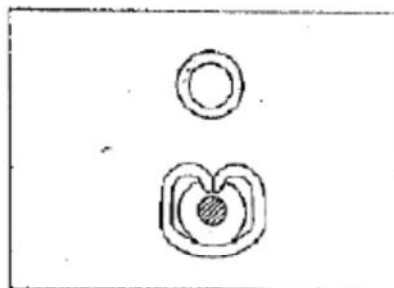


Good

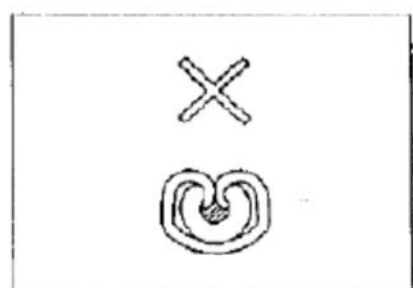


Crimp too much



Good




NG




As following figure shown. It is no problem if wire bent up down 90 degrees 1 cycle and insulation position still in ideal position.

Insulation Crimp Condition


### 13 CONDUCTORS CRIMPING CONDITION

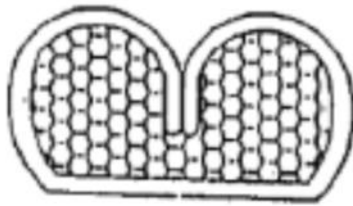

○ Good

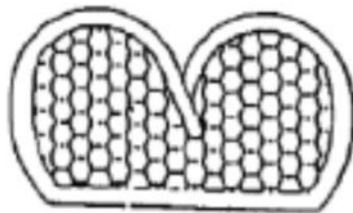

× NG

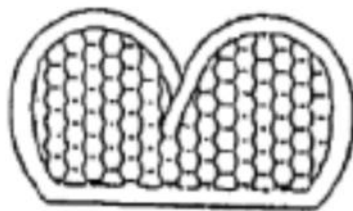

× NG

Lower conduct  
retension force




Good



Large burr

NG

### 14 CRIMPING REQUIREMENT

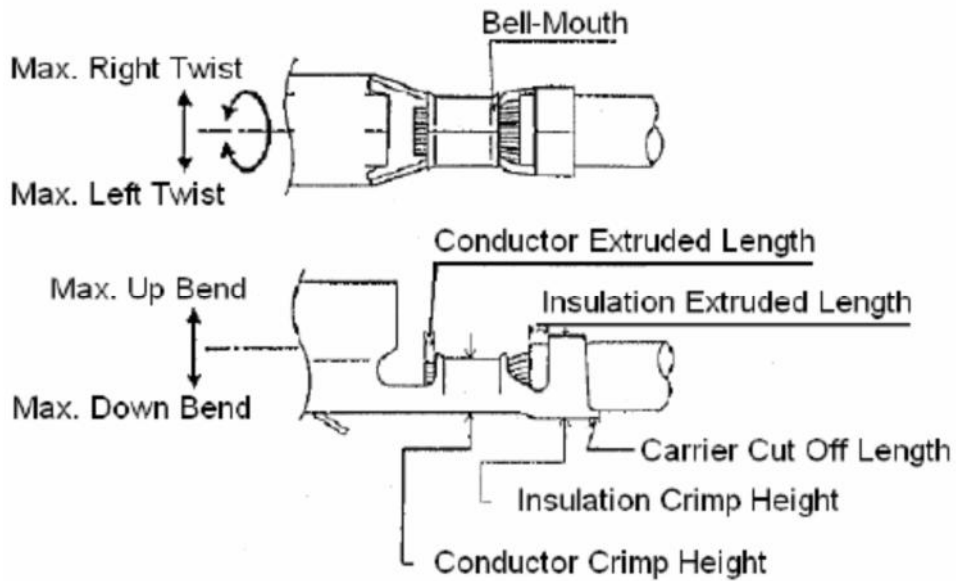

Item	Range(Ref.)
Max. Up Bend	6°
Max. Down Bend	6°
Max. Left Twist	5°
Max. Right Twist	5°
Bell-Mouth Length	0.1~0.3mm
Carrier Cut Off Length	0~0.2mm
Conductor Extruded Length	0.05~0.2mm