



SPECIFICATION

宏致電子股份有限公司

桃園縣中壢市東園路13號

No.13, Dongyuan Rd., Jhongli City,

Taoyuan County 320, Taiwan (R.O.C.)

TEL: +886-3-463-2808

FAX: +886-3-463-1800

SPEC. NO.: PS-51619-XXXXX-XXX REVISION: E

PRODUCT NAME: 0.5mm / 1.0mm PITCH EASY ON FPC/FFC CONN.

SMT TYPE

PRODUCT NO: 51619/51652/51653/51654/EA61J/52539/52561 SERIES

PREPARED: Xu,Bin DATE: 2022/01/13	CHECKED: Xu,ZhiYong DATE: 2022/01/13	APPROVED: Xu,ZhiYong DATE: 2022/01/13
--	---	--



Aces P/N: **51619/51652/51653/51654/ EA61J**
/52539/52561Series

TITLE: 0.5 MM/1.0 MM PITCH EASY ON FPC/FFC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: 2022.01.13

REVISION: E

ECN No: ECN-006718

PAGE: **2** OF **10**

1	REVISION HISTORY	3
2	SCOPE.....	4
3	APPLICABLE DOCUMENTS	4
4	REQUIREMENTS	4
5	PERFORMANCE	5
6	INFRARED REFLOW CONDITION.....	8
7	PRODUCT QUALIFICATION AND TEST SEQUENCE.....	9
8	INSTRUCTION UPON USAGE	10



Aces P/N: **51619/51652/51653/51654/ EA61J**
/52539/52561Series

TITLE: 0.5 MM/1.0 MM PITCH EASY ON FPC/FFC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: 2022.01.13

REVISION: E

ECN No: ECN-006718

PAGE: **3** OF **10**

1 Revision History

Rev.	ECN #	Revision Description	Prepared	Date
O	ECN-1407231	NEW SPEC RELEASE	XUBIN	2014.07.09
A	ECN-1705285	ADD EA61J SERIES	XUBIN	2017.05.18
B	ECN-1801464	Low Level Contact Resistance revised	JAMESLEN	2018.01.25
C	ECN-1905051	UPDATED	HUANGYAN	2019/05/05
D	ECN-002016	ADD 52539 SERIES	XUBIN	2021/02/19
E	ECN-006718	ADD 52561 SERIES	XUBIN	2022/01/13

TITLE: 0.5 MM/1.0 MM PITCH EASY ON FPC/FFC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: 2022.01.13

REVISION: E

ECN No: ECN-006718

PAGE: 4 OF 10

2 SCOPE

This specification covers performance, tests and quality requirements for **0.5mm and 1.0mm pitch easy on FPC/FFC SMT Type connector.**

3 APPLICABLE DOCUMENTS

EIA-364: ELECTRONICS INDUSTRIES ASSOCIATION

4 REQUIREMENTS

4.1 Design and Construction

- 4.1.1 Product shall be of design, construction and physical dimensions specified on applicable product drawing.
- 4.1.2 All materials conform to R.o.H.S. and the standard depends on TQ-WI-140101.

4.2 Materials and Finish

- 4.2.1 Contact: High performance copper alloy (**Phosphor Bronze**)
Finish: (a) Contact Area: **Refer to the drawing.**
(b) Under plate: **Refer to the drawing.**
(c) Solder area: **Refer to the drawing.**
- 4.2.2 Housing: Thermoplastic or Thermoplastic High Temp., **UL94V-0**
- 4.2.3 Actuator: Thermoplastic or Thermoplastic High Temp., **UL94V-0**
- 4.2.4 Fitting Nail: **Copper Alloy, Finish: Refer to the drawing.**

4.3 Ratings

- 4.3.1 Working voltage less than 36 volts (per pin)
- 4.3.2 Voltage: 50 Volts AC (per Pin)
- 4.3.3 Current: DC 0.5 Amperes For 0.5mm Pitch; (per pin)
DC 1.0 Amperes For 1.0mm Pitch; (per pin)
- 4.3.4 Operating Temperature : -40°C to +85°C

TITLE: 0.5 MM/1.0 MM PITCH EASY ON FPC/FFC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: 2022.01.13


REVISION: E

ECN No: ECN-006718

PAGE: 5 OF 10

5 Performance

5.1. Test Requirements and Procedures Summary

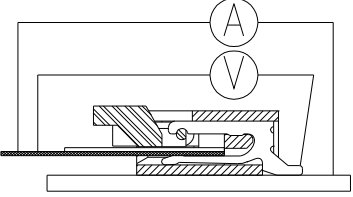Item	Requirement	Standard
Examination of Product	Product shall meet requirements of applicable product drawing and specification.	Visual, dimensional and functional per applicable quality inspection plan.
ELECTRICAL		
Item	Requirement	Standard
Low Level Contact Resistance	40 m Ω Max. (initial) per contact 20 m Ω Max. Change allowed	Mate connectors, measure by dry circuit, 20mV Max., 100mA Max. (EIA-364-23) 
Insulation Resistance	500 M Ω Min.	Unmated connectors, apply 500 V DC between adjacent terminals. (EIA-364-21)
Dielectric Withstanding Voltage	No discharge, flashover or breakdown. Current leakage: 2 mA max.	AC 250 VAC Min. at sea level for 1 minute. Test between adjacent contacts of unmated connectors. (EIA-364-20)
Temperature Rise	30°C Max. Change allowed	Mate connector: measure the temperature rise at rated current until temperature stable. The ambient condition is still air at 25°C (EIA-364-70, METHOD1, CONDITION1)


TITLE: 0.5 MM/1.0 MM PITCH EASY ON FPC/FFC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: 2022.01.13

REVISION: E

ECN No: ECN-006718

PAGE: 6 OF 10

MECHANICAL		
Item	Requirement	Standard
Durability	30 cycles.	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of 25.4 ± 3mm/min. (EIA-364-09)
FPC Retention Force	Initial: 4 to 20(include)pin=40g/per pin (min) 21to 40(include)pin=35g/per pin (min) 41 or over 41pin=30g/per pin(min) After Durability : 4 to 20(include)pin=35g/per pin (min) 21to 40(include)pin=30g/per pin (min) 41 or over 41pin=25g/per pin(min)	A connector shall be soldered on a board and insert the actuator, pull the FPC at the speed rate of 25.4 ± 3 mm/min. 
Terminal / Housing Retention Force	0.15kgf MIN.	Operation Speed : 25.4 ± 3 mm/minute. Measure the contact retention force with tester.
Fitting nail / Housing Retention Force	0.1kgf MIN.	Operation Speed : 25.4 ± 3 mm/minute. Measure the contact retention force with tester.
Vibration	1 μs Max.	The electrical load condition shall be 100 mA maximum for all contacts. Subject to a simple harmonic motion having amplitude of 0.76mm (1.52mm maximum total excursion) in frequency between the limits of 10 and 55 Hz . The entire frequency range, from 10 to 55 Hz and return to 10 Hz , shall be traversed in approximately 1 minute. This motion shall be applied for 2 hours in each of three mutually perpendicular directions. (EIA-364-28 Condition I)
Shock (Mechanical)	1 μs Max.	Subject mated connectors to 50 G's (peak value) half-sine shock pulses of 11 milliseconds duration. Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). The electrical load condition shall be 100mA maximum for all contacts.



Aces P/N: **51619/51652/51653/51654/ EA61J**
/52539/52561Series

TITLE: 0.5 MM/1.0 MM PITCH EASY ON FPC/FFC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: 2022.01.13

REVISION: E

ECN No: ECN-006718

PAGE: 7 OF 10

(EIA-364-27, test condition A)

ENVIRONMENTAL

Item	Requirement	Standard
Resistance to Reflow Soldering Heat	See Product Qualification and Test Sequence Group 10 (Lead Free)	Pre Heat : 150°C~180°C, 60~120sec. Heat : 230°C Min., 40sec Min. Peak Temp. : 260°C Max, 10sec Max. Reflow number cycle : 2 times
Thermal Shock	See Product Qualification and Test Sequence Group 4	Mate module and subject to follow condition for 5 cycles. 1 cycles: -55 +0/-3 °C, 30 minutes +85 +3/-0 °C, 30 minutes (EIA-364-32, test condition I)
Humidity	See Product Qualification and Test Sequence Group 4	Mated Connector 40°C, 90~95% RH, 96 hours. (EIA-364-31, Condition A, Method II)
Temperature life-Heat	See Product Qualification and Test Sequence Group 5	Subject mated connectors to temperature life at 85°C for 96 hours. (EIA-364-17, Test condition A)
Temperature life-Cold	See Product Qualification and Test Sequence Group 6	Subject mated connectors to temperature life at -40°C for 48 hours. Measure Signal. (EIA-364-17, Test condition A)
Salt Spray (Only For Gold Plating)	See Product Qualification and Test Sequence Group 7	Subject mated/unmated connectors to 5% salt-solution concentration, 35°C (I) Gold flash for 8 hours (II) Gold plating 5 u" or over 5 u" for 96 hours. (EIA-364-26)
Solder ability	Tin plating: Solder able area shall have minimum of 95% solder coverage. Gold plating: Solder able area shall have minimum of 75% solder coverage	And then into solder bath, Temperature at 245 ±5°C, for 4-5 sec. (EIA-364-52)
Hand Soldering Temperature Resistance	Appearance : No damage	T ≥ 350°C , 3 sec at least

Note 1. Flowing Mixed Gas shall be conducted by customer request.


TITLE: 0.5 MM/1.0 MM PITCH EASY ON FPC/FFC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: 2022.01.13


REVISION: E

ECN No: ECN-006718

PAGE: **8** OF **10**

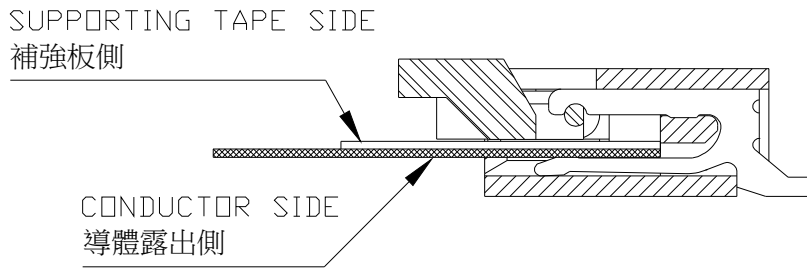

6 INFRARED REFLOW CONDITION

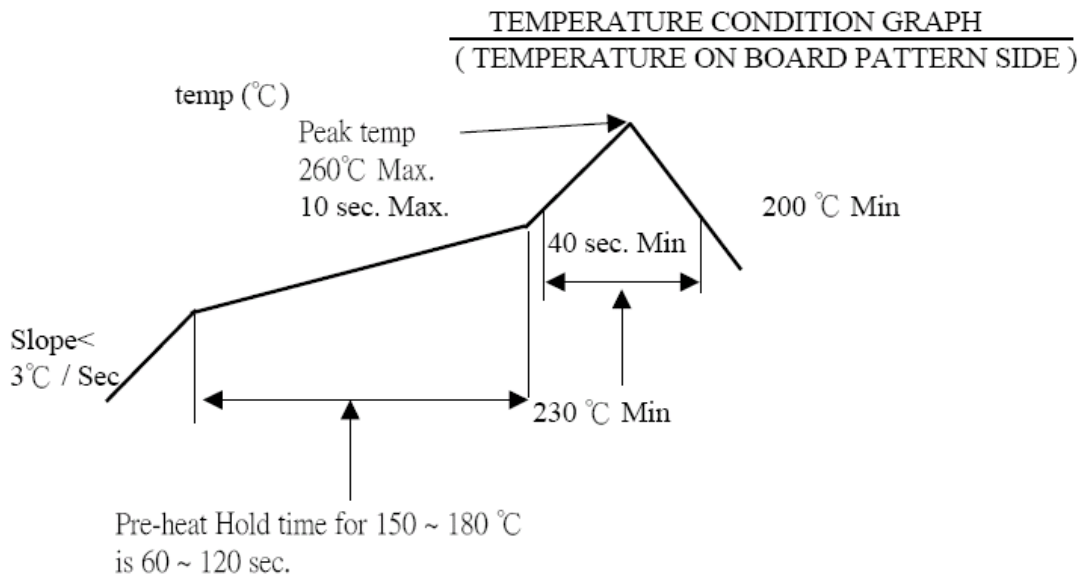



Aces P/N: **51619/51652/51653/51654/ EA61J**
/52539/52561Series

TITLE: 0.5 MM/1.0 MM PITCH EASY ON FPC/FFC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: 2022.01.13

REVISION: E

ECN No: ECN-006718

PAGE: 9 OF 10

7 PRODUCT QUALIFICATION AND TEST SEQUENCE

Test or Examination	Test Group										
	1	2	3	4	5	6	7	8	9	10	11
	Test Sequence										
Examination of Product				1、7	1、6	1、4	1、4			1	1
Low Level Contact Resistance		1、5	1、4	2、10	2、9	2、5	2、5			3	
Insulation Resistance				3、9	3、8						
Dielectric Withstanding Voltage				4、8	4、7						
Temperature rise	1										
Durability		3									
Vibration			2								
Shock (Mechanical)			3								
Thermal Shock				5							
Humidity				6							
Temperature life-Heat					3						
Temperature life-Cold						3					
Salt Spray(Only For Gold Plating)							3				
Solder ability								1			
FPC Retention Force		2、4									
Terminal /Housing Retention Force									1		
Fitting Nail /Housing Retention Force									2		
Resistance to Soldering Heat										2	
Hand Soldering Temperature Resistance											2
Sample Size	2	4	4	4	4	4	4	4	2	4	4



Aces P/N: **51619/51652/51653/51654/ EA61J**
/52539/52561Series

TITLE: 0.5 MM/1.0 MM PITCH EASY ON FPC/FFC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: 2022.01.13

REVISION: E

ECN No: ECN-006718

PAGE: **10** OF **10**

8 INSTRUCTION UPON USAGE

Operation	Precautions
-----------	-------------

TITLE: 0.5 MM/1.0 MM PITCH EASY ON FPC/FFC CONN. SMT R/A BOTTOM CONTACT TYPE

RELEASE DATE: 2022.01.13


REVISION: E

ECN No: ECN-006718


PAGE: **11** OF **10**

**FPC/FFC Termination procedure.
 Connector installed on the board.**


1) Lift up the actuator. Use thumb or index finger.



2) Do with the actuator opened completely, and insert it in the interior of the insertion entrance surely when you insert FPC/FFC. There are some insertion resistance because this connector has the FPC/FFC temporary retention mechanism.

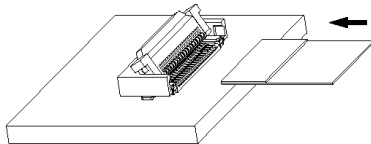


3) Rotate down the actuator until firmly closed. It is critical that the inserted FPC/FFC is not moved and remains fully inserted. Should the FPC/FFC be moved, open the actuator and repeat the process, starting with Step 1 above.




FPC/FFC Removal


1) Lift up the actuator.
 2) Carefully remove the FPC/FFC.



1) Do when you pull out mating FPC/FFC with the Actuator opened completely. Confirm whether to Have adhered to the terminal contact part before FPC/FFC is mated with the connector housing when the opening of the actuator is the un-complete and FPC/FFC is pulled out.



2) Do not add the load mating FPC/FFC with connector housing.



3) Due to the structure of the connectors, they do not have string resistance to upward pulling; therefore, support the FPC/FFC when a pulling force is applied to it.

