



SPECIFICATION

宏致電子股份有限公司

桃園縣中壢市東園路13號

No.13, Dongyuan Rd., Jhongli City,

Taoyuan County 320, Taiwan (R.O.C.)

TEL: +886-3-463-2808

FAX: +886-3-463-1800

SPEC. NO.: PS-53027-XXXXX-XXX REVISION: 0

PRODUCT NAME: 2.0mm BATTERY T/H TYPE CONN

PRODUCT NO: 53027-XXXXX-XXX;

PREPARED: HUANTY DATE: 2012/07/11	CHECKED: TONY DATE: 2012/07/11	APPROVED: JASON DATE: 2012/07/11
--	---	---



Aces P/N: **53027-XXXXX-XXX** SERIES

TITLE: **2.0mm BATTERY T/H TYPE CONN**

RELEASE DATE: 2012/07/11

REVISION: O

ECN No: 1207192

PAGE: **2** OF **9**

1	REVISION HISTORY	3
2	SCOPE	4
3	APPLICABLE DOCUMENTS	4
4	REQUIREMENTS	4
5	PERFORMANCE	5
6	INFRARED REFLOW CONDITION.....	7
7	PRODUCT QUALIFICATION AND TEST SEQUENCE.....	9



Aces P/N: **53027-XXXXX-XXX** SERIES

TITLE: **2.0mm BATTERY T/H TYPE CONN**

RELEASE DATE: 2012/07/11

REVISION: O

ECN No: 1207192

PAGE: **3** OF **9**

1 Revision History

Rev.	ECN #	Revision Description	Prepared	Date
1	ECN-1203405	NEW SPEC	HUANTY	2012/3/21
O	ECN-1207192	RELEASE	HUANTY	2012/07/11

TITLE: **2.0mm BATTERY T/H TYPE CONN**

RELEASE DATE: 2012/07/11

REVISION: O

ECN No: 1207192

PAGE: **4** OF **9**

2 SCOPE

This specification covers performance, tests and quality requirements for **2.0mm pitch Battery T/H TYPE CONN**.

3 APPLICABLE DOCUMENTS

EIA-364: ELECTRONICS INDUSTRIES ASSOCIATION

4 REQUIREMENTS

4.1 Design and Construction

- 4.1.1 Product shall be of design, construction and physical dimensions specified on applicable product drawing.
- 4.1.2 All materials conform to R.o.H.S. and the standard depends on TQ-WI-140101.

4.2 Materials and Finish

- 4.2.1 Contact: **High performance copper alloy (Brass)**
Finish: (a) Contact Area: **Refer to the drawing.**
(b) Under plate: **Refer to the drawing.**
(c) Solder area: **Refer to the drawing.**
- 4.2.2 Housing: **Thermoplastic or Thermoplastic High Temp., UL94V-0**
- 4.2.3 NUT: **Copper alloy**
Finish: **Refer to the drawing.**

4.3 Ratings

- 4.3.1 Voltage: **30 Volts AC (per pin)**
- 4.3.2 Current: **5.0 Amperes (per pin)**
- 4.3.3 Operating Temperature : **-40°C to +85°C**

TITLE: 2.0mm BATTERY T/H TYPE CONN

RELEASE DATE: 2012/07/11

REVISION: O

ECN No: 1207192

PAGE: **5** OF **9**

5 Performance

5.1. Test Requirements and Procedures Summary

Item	Requirement	Standard
Examination of Product	Product shall meet requirements of applicable product drawing and specification.	Visual, dimensional and functional per applicable quality inspection plan.
ELECTRICAL		
Item	Requirement	Standard
Low Level Contact Resistance	30 m Ω Max.(initial)per contact 15 m Ω Max.(after test) Change allowed	Mate connectors, measure by dry circuit, 20mV Max., 100mA Max. (EIA-364-23)
Insulation Resistance	500 M Ω Min.	Unmated connectors, apply 500 V DC between adjacent terminals. (EIA-364-21)
Dielectric Withstanding Voltage	No discharge, flashover or breakdown. Current leakage: 1 m A max.	300V AC Min. at sea level for 1 minute. Test between adjacent contacts of unmated connectors. (EIA-364-20)
Temperature rise	30°C Max. Change allowed	Mate connector: measure the temperature rise at rated current until temperature stable. The ambient condition is still air at 25°C (EIA-364-70,METHOD1,CONDITION1)
MECHANICAL		
Item	Requirement	Standard
Durability	5000 cycles.	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of 25.4 \pm 3 mm/min. (EIA-364-09)
Mating / Un-mating Forces	Mating Force: 0.25kgf Max / per pin. Un-mating Force: 0.02 kgf Min / per pin	Operation Speed : 25.4 \pm 3 mm/minute.. Measure the force required to mate/Un-mate connector. (EIA-364-13)
Contact Retention Force	0.4kgf MIN.	Apply axial pull out force at the speed rate of 25.4 \pm 3 mm/minute. On the terminal assembled in the housing.

TITLE: 2.0mm BATTERY T/H TYPE CONN

RELEASE DATE: 2012/07/11

REVISION: O

ECN No: 1207192

PAGE: **6** OF **9**

Item	Requirement	Standard
Vibration	1 μ s Max.	The electrical load condition shall be 100 m A maximum for all contacts. Subject to a simple harmonic motion having amplitude of 0.76mm (1.52mm maximum total excursion) in frequency between the limits of 10 and 55 Hz . The entire frequency range, from 10 to 55 Hz and return to 10 Hz , shall be traversed in approximately 1 minute. This motion shall be applied for 2 hours in each of three mutually perpendicular directions. (EIA-364-28 Condition I)
Shock (Mechanical)	1 μ s Max.	Subject mated connectors to 50 G's (peak value) half-sine shock pulses of 11 milliseconds duration. Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). The electrical load condition shall be 100mA maximum for all contacts. (EIA-364-27, test condition A)

ENVIRONMENTAL

Item	Requirement	Standard
Resistance to Reflow Soldering Heat	See Product Qualification and Test Sequence Group 9 (Lead Free)	Pre Heat : 150°C~180°C, 60~120sec. Heat : 230°C Min., 40sec Min. Peak Temp. : 260°C Max, 10sec Max.
Thermal Shock	See Product Qualification and Test Sequence Group 4	Mate module and subject to follow condition for 10 cycles. 1 cycles: -55 +0/-3 °C, 30 minutes +85 +3/-0 °C, 30 minutes (EIA-364-32, test condition I)
Humidity	See Product Qualification and Test Sequence Group 4	Mated Connector 40°C, 90~95% RH, 96 hours. (EIA-364-31, Condition A, Method II)
Temperature life	See Product Qualification and Test Sequence Group 5	Subject mated connectors to temperature life at 85°C for 96 hours . (EIA-364-17, Test condition A)

Aces P/N: **53027-XXXXX-XXX** SERIESTITLE: **2.0mm BATTERY T/H TYPE CONN**

RELEASE DATE: 2012/07/11

REVISION: O

ECN No: 1207192

PAGE: **7** OF **9**

Item	Requirement	Standard
Salt Spray (Only For Gold Plating)	See Product Qualification and Test Sequence Group 6	Subject mated/unmated connectors to 5% salt-solution concentration, 35℃ (I) Gold flash for 8 hours (II) Gold plating 5 u" for 96 hours. (EIA-364-26)
Solder ability	Tin plating: Solder able area shall have minimum of 95% solder coverage. Gold plating: Solder able area shall have minimum of 75% solder coverage	And then into solder bath, Temperature at 245 ±5℃, for 4-5 sec. (EIA-364-52)
Hand Soldering Temperature Resistance	Appearance: No damage	T ≥ 350℃, 3sec at least.

Note. Flowing Mixed Gas shall be conducted by customer request.

TITLE: **2.0mm BATTERY T/H TYPE CONN**


RELEASE DATE: 2012/07/11

REVISION: O

ECN No: 1207192

PAGE: **8** OF **9**

6 INFRARED REFLOW CONDITION

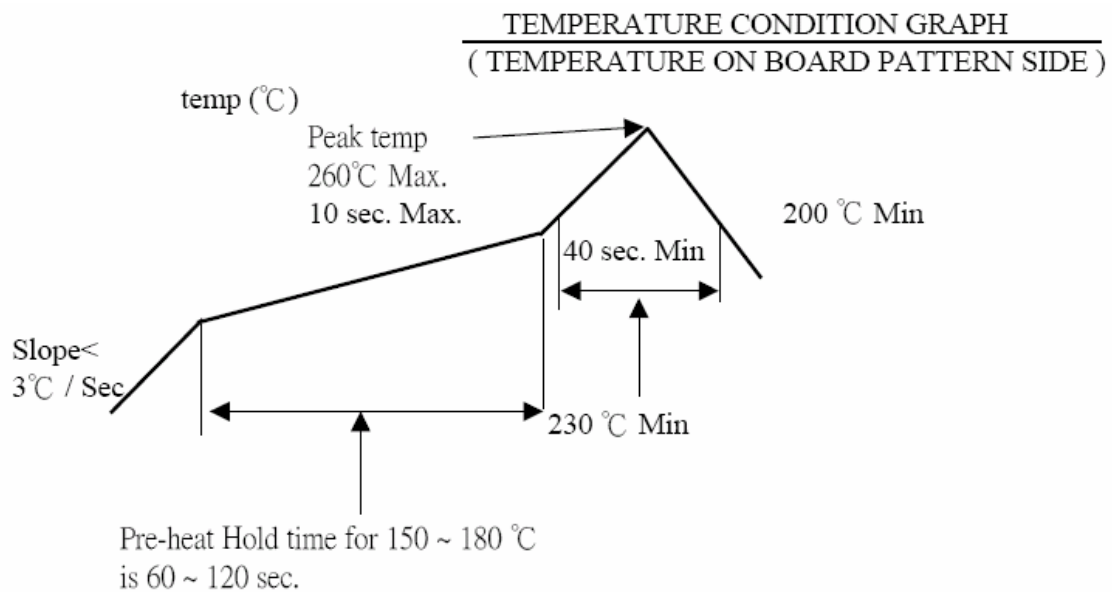

TITLE: **2.0mm BATTERY T/H TYPE CONN**

RELEASE DATE: 2012/07/11

REVISION: O

ECN No: 1207192

PAGE: **9** OF **9**

7 PRODUCT QUALIFICATION AND TEST SEQUENCE

Test or Examination	Test Group										
	1	2	3	4	5	6	7	8	9	10	11
	Test Sequence										
Examination of Product				1、7	1、6	1、4			1	1	1
Low Level Contact Resistance		1、5	1、4	2、10	2、9	2、5			3		
Insulation Resistance				3、9	3、8						
Dielectric Withstanding Voltage				4、8	4、7						
Temperature rise	1										
Mating / Unmating Forces		2、4									
Durability		3									
Vibration			2								
Shock (Mechanical)			3								
Thermal Shock				5							
Humidity				6							
Temperature life					5						
Salt Spray(Only For Gold Plating)						3					
Solder ability							1				
Contact Retention Force								1			
Resistance to Soldering Heat									2		
Hand Soldering Temperature Resistance										2	
Sample Size	2	4	4	4	4	4	2	4	4	4	4