



SPECIFICATION

宏致電子股份有限公司

桃園縣中壢市東園路13號

No.13, Dongyuan Rd., Jhongli City,

Taoyuan County 320, Taiwan (R.O.C.)

TEL: +886-3-463-2808

FAX: +886-3-463-1800

SPEC. NO.: PS-59011-XXXXX-XXX REVISION: N

PRODUCT NAME: 2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE

PRODUCT NO: 59011 59012 50404 50390 50471 51249 51251 51248
86701-T 51303-T 60734 60735 607XX SERIES

PREPARED: ZHOUQUAN DATE: 2018.08.14	CHECKED: BRAVE DATE: 2018.08.14	APPROVED: BRAVE DATE: 2018.08.14
--	--	---



Aces P/N: **59011 series**

TITLE: **2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE**

RELEASE DATE: **2018/08/17**

REVISION: **N**

ECN No: **ECN-1808348**

PAGE: **2** OF **16.**

1	REVISION HISTORY	3
2	SCOPE	4
3	APPLICABLE DOCUMENTS	4
4	REQUIREMENTS	4
5	PERFORMANCE	5
6	INFRARED REFLOW CONDITION.....	8
7	PRODUCT QUALIFICATION AND TEST SEQUENCE.....	9
8	MATING / UNMATING FORCE.....	10
9	ANATOMY OF CRIMPING TERMINAL.....	11
10	APPLICABLE WIRES: UL1007 ETFE WIRE.....	11
11	CRIMPING CONDITION	12
12	CRIMPING HEIGHT MEASUREMENT	13
13	PULL FORCE OF CRIMPING SECTION MEASUREMENT	14
14	STANDARD INSULATION CRIMPING	14
15	CONDUCTORS CRIMPING CONDITION.....	15
16	CRIMPING REQUIREMENT	16



Aces P/N: **59011 series**

TITLE: **2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE**

RELEASE DATE: 2018/08/17

REVISION: N

ECN No: ECN-1808348

PAGE: **3** OF **16.**

1 REVISION HISTORY

Rev.	ECN #	Revision Description	Prepared	Date
O	ECN-0909054	NEW RELEASE	JASON	2009.09.14
A	ECN-0912339	ADD 50404	JASON	2009.12.30
B	ECN-1005190	REVISE	VIOLET	2010.05.21
C	ECN-1105100	ADD 50471 SERIES	GAVIN	2011.05.09
D	ECN-1106392	ADD 50482 SERIES	GAVIN	2011.06.24
E	ECN-1112473	DELETE 50482 SERIES	GAVIN	2011.12.27
F	ECN-1306170	ADD 51249/51251 SERIES	BRAVE	2013.05.30
G	ECN-1307043	ADD 51248 SERIES	BRAVE	2013.07.03
H	ECN-1402199	ADD WORKING VOLTAGE	XUFEI	2014.02.24
J	ECN-1602XXX	ADD 51303	JUGG	2016.02.04
K	ECN-1605404	ADD 60734 60735	TINA	2016.05.24
L	ECN-1801447	ADD 607XX Change Durability 50 cycles	LIAO WAN TING	2018.01.26
M	ECN-1805022	FOR DWR-1804198 ADD AWG#26 (UL10368 ,UL10064) CURRENT	SHI,YANAN	2018.04.24
N	ECN-1808348	Change Salt Spray times	ZHOUQUAN	2015.01.08

TITLE: **2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE**

RELEASE DATE: 2018/08/17

REVISION: N

ECN No: ECN-1808348

PAGE: **4** OF **16.**

2 SCOPE

This specification covers performance, tests and quality requirements for **2.0 mm pitch WTB connector.T/H D/R S/T Type**.

3 APPLICABLE DOCUMENTS

EIA-364: ELECTRONICS INDUSTRIES ASSOCIATION

4 REQUIREMENTS

4.1 Design and Construction

- 4.1.1 Product shall be of design, construction and physical dimensions specified on applicable product drawing.
- 4.1.2 All materials conform to R.o.H.S. and the standard depends on TQ-WI-140101.

4.2 Materials and Finish

- 4.2.1 Contact: High performance copper alloy.
Finish: (a) Contact Area: [Refer to the drawing](#).
(b) Under plate: [Refer to the drawing](#).
(c) Solder area: [Refer to the drawing](#).
- 4.2.2 Housing: Thermoplastic or Thermoplastic High Temp., UL94V-0
- 4.2.3 Fitting Nail: [Copper Alloy](#),
Finish: [Refer to the drawing](#).

4.3 Ratings

- 4.3.1 Working voltage less than 36 volts (per pin)
- 4.3.2 Voltage: [250 Volts AC \(per pin\)](#)
- 4.3.3 Current:
 - [AWG#24: 3.0 Amperes \(per pin\)](#)
 - [AWG#26: 1.5 Amperes \(per pin\)](#)
 - [AWG#28: 1.0 Amperes \(per pin\)](#)
 - [AWG#26: 1.6 Amperes \(per pin\) \(UL10368 ,UL10064\)](#)
- 4.3.4 Operating Temperature : [-25°C to +85°C](#)

TITLE: 2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE

RELEASE DATE: 2018/08/17

REVISION: N

ECN No: ECN-1808348

PAGE: 5 OF 16.

5 Performance

5.1. Test Requirements and Procedures Summary

Item	Requirement	Standard
Examination of Product	Product shall meet requirements of applicable product drawing and specification.	Visual, dimensional and functional per applicable quality inspection plan.
ELECTRICAL		
Item	Requirement	Standard
Low Level Contact Resistance	30 m Ω Max.	Mate connectors, measure by dry circuit, 20mV Max., 10mA Max. (EIA-364-23)
Insulation Resistance	1000 M Ω Min.	Unmated connectors, apply 500 V DC between adjacent terminals. (EIA-364-21)
Dielectric Withstanding Voltage	No discharge, flashover or breakdown. Current leakage: 1 mA max.	800V AC Min. at sea level for 1 minute. Test between adjacent contacts of unmated connectors. (EIA-364-20)
Temperature Rise	30°C Max. Change allowed	Mate connector: measure the temperature rise at rated current until temperature stable. The ambient condition is still air at 25°C (EIA-364-70,METHOD1,CONDITION1)
MECHANICAL		
Item	Requirement	Standard
Durability	50 cycles.	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of 25.4 $\pm$ 3mm/min.
Mating / Unmating Forces	Please see Item 8	Operation Speed : 25.4 $\pm$ 3 mm/minute.. Measure the force required to mate/unmate connector. (EIA-364-13)
Contact Retention Force (Board Side)	1.00Kgf Min.(Matt Tin) 0.70kgf Min.(Gold Flash)	Operation Speed : 25.4 $\pm$ 3 mm/minute.. Measure the contact retention force with tester.
Crimping Terminal / Housing Retention Force (Cable Side)	0.70 Kgf MIN.	Apply axial pull out force at the speed rate of 25.4 $\pm$ 3 mm/minute. On the terminal assembled in the housing.

TITLE: 2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE

RELEASE DATE: 2018/08/17

REVISION: N

ECN No: ECN-1808348

PAGE: 6 OF 16.

Crimping Pull Out Force	AWG# 24: 30N Min. AWG# 26: 20N Min. AWG# 28: 15N Min.	Operation Speed : 25.4 ± 3 mm/minute. Fix the crimped terminal, apply axial pull out force on the wire.
Vibration	1 μs Max.	The electrical load condition shall be 100 mA maximum for all contacts. Subject to a simple harmonic motion having amplitude of 0.76mm (1.52mm maximum total excursion) in frequency between the limits of 10 and 55 Hz. The entire frequency range, from 10 to 55 Hz and return to 10 Hz, shall be traversed in approximately 1 minute. This motion shall be applied for 2 hours in each of three mutually perpendicular directions. (EIA-364-28 Condition I)
Shock (Mechanical)	1 μs Max.	Subject mated connectors to 50 G's (peak value) half-sine shock pulses of 11 milliseconds duration. Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). The electrical load condition shall be 100mA maximum for all contacts. (EIA-364-27, test condition A)

ENVIRONMENTAL

Item	Requirement	Standard
Resistance to Wave Soldering Heat (Board Side)	See Product Qualification and Test Sequence Group 10 (Lead Free)	Solder Temp. : 265±5°C, 10±0.5sec.
Resistance to Reflow Soldering Heat (Board Side)	See Product Qualification and Test Sequence Group 10 (Lead Free)	Pre Heat : 150°C~180°C, 60~120sec. Heat : 230°C Min., 40sec Min. Peak Temp. : 260°C Max, 10sec Max.
Thermal Shock	See Product Qualification and Test Sequence Group 4	Mate module and subject to follow condition for 5 cycles. 1 cycles: -55 +0/-3 °C, 30 minutes +85 +3/-0 °C, 30 minutes (EIA-364-32, test condition I)
Humidity	See Product Qualification and Test Sequence Group 4	Mated Connector 40°C, 90~95% RH, 96 hours. (EIA-364-31,Condition A, Method II)

TITLE: 2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE

RELEASE DATE: 2018/08/17

REVISION: N

ECN No: ECN-1808348

PAGE: 7 OF 16.

Temperature Life	See Product Qualification and Test Sequence Group 5	Subject mated connectors to temperature life at 85°C for 96 hours. (EIA-364-17, Test condition A)
Salt Spray (Only For Gold Plating)	See Product Qualification and Test Sequence Group 6	Subject mated/unmated connectors to 5% salt-solution concentration, 35°C (I)Gold flash for 8 hours (II)Gold plating 3 u" for 48 hours (III) Gold plating 5 u" for 96 hours. (EIA-364-26)
Solder ability (Board Side)	Tin plating: Solder able area shall have minimum of 95% solder coverage. Gold plating: Solder able area shall have minimum of 75% solder coverage	And then into solder bath, Temperature at 245 ±5°C, for 4-5 sec. (EIA-364-52)
Hand Soldering Temperature Resistance (Board Side)	Appearance: No damage	T ≥ 350°C, 3sec at least.

Note. Flowing Mixed Gas shall be conducted by customer request.

TITLE: **2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE**


RELEASE DATE: 2018/08/17

REVISION: N

ECN No: ECN-1808348

PAGE: **8** OF **16.**

6 INFRARED REFLOW CONDITION

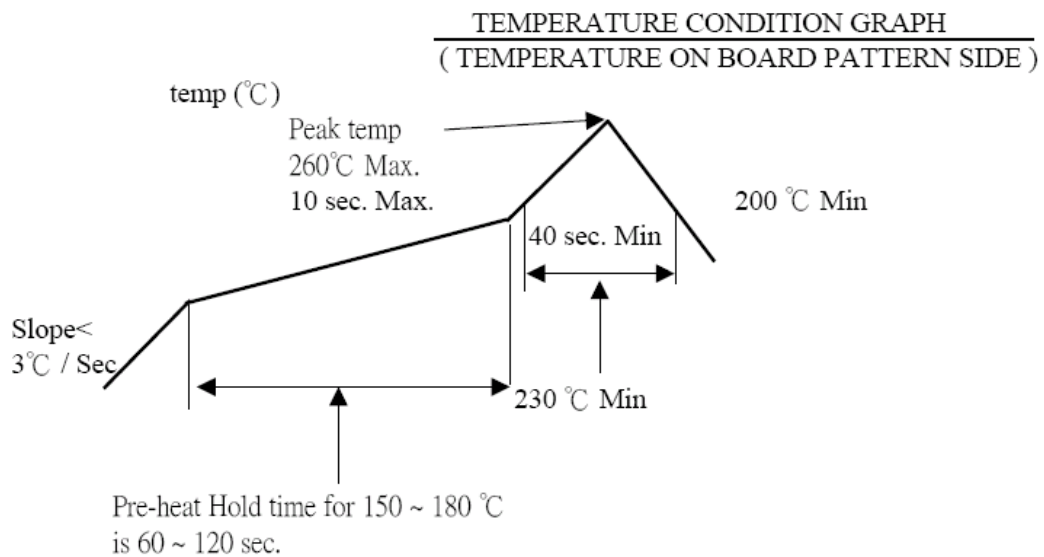

TITLE: 2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE

RELEASE DATE: 2018/08/17

REVISION: N

ECN No: ECN-1808348

PAGE: 9 OF 16.

7 PRODUCT QUALIFICATION AND TEST SEQUENCE

Test or Examination	Test Group										
	1	2	3	4	5	6	7	8	9	10	11
	Test Sequence										
Examination of Product				1、7	1、6	1、4				1	1
Low Level Contact Resistance		1、5	1、4	2、10	2、9	2、5				3	
Insulation Resistance				3、9	3、8						
Dielectric Withstanding Voltage				4、8	4、7						
Temperature Rise	1										
Mating / Unmating Force		2、4									
Durability		3									
Contact Retention Force (Board Side)									3		
Vibration			2								
Shock (Mechanical)			3								
Thermal Shock				5							
Humidity				6							
Temperature Life					5						
Salt Spray (Only For Gold Plating)						3					
Solder ability (Board Side)							1				
Crimping Pull Out Force								1			
Crimping Terminal / Housing Retention Force (Cable Side)									1		
Resistance to Soldering Heat (Board Side)										2	
Hand Soldering Temperature Resistance (Board Side)											2
Sample Size	2	4	4	4	4	4	2	4	4	4	4

TITLE: 2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE

RELEASE DATE: 2018/08/17

REVISION: N

ECN No: ECN-1808348

PAGE: **10** OF **16**.

8 MATING / UNMATING FORCE

No.of circuits	At initial		(Kgf) At 50th
	Mating Force (Max.)	Unmating Force (Min.)	Unmating Force (Min.)
Single	0.75Kg	0.10Kg	0.08Kg
4	3.50Kg	1.00Kg	0.80Kg
5	4.00Kg	1.00Kg	0.80Kg
6	4.50Kg	1.20Kg	1.00Kg
7	5.00Kg	1.20Kg	1.00Kg
8	5.50Kg	1.40Kg	1.20Kg
9	6.00Kg	1.40Kg	1.20Kg
10	6.50Kg	1.60Kg	1.40Kg
11	7.00Kg	1.60Kg	1.40Kg
12	7.50Kg	1.80Kg	1.60Kg
13	7.50Kg	1.80Kg	1.60Kg
14	8.00Kg	2.00Kg	1.80Kg
15	8.00Kg	2.00Kg	1.80Kg
16,17	9.50Kg	2.20Kg	2.00Kg
18,19	10.00Kg	2.40Kg	2.20Kg
20,21	10.50Kg	2.60Kg	2.40Kg
22,23	11.00Kg	2.80Kg	2.60Kg
24,25	11.50Kg	3.00Kg	2.80Kg
26,27	12.00Kg	3.20Kg	3.00Kg
28,29	12.50Kg	3.40Kg	3.20Kg
30,31	13.00Kg	3.60Kg	3.40Kg
32	13.50Kg	3.80Kg	3.60Kg

Test method : A Housing crimped contact (s) and a header shall be mated and unmated on the same axis. Initial insertion and withdrawal circuit and multi – circuits. For the measurement of single circuit,the housing lock shall be removed.

TITLE: **2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE**


RELEASE DATE: 2018/08/17

REVISION: N

ECN No: ECN-1808348

PAGE: **11** OF **16**.

9 ANATOMY OF CRIMPING TERMINAL

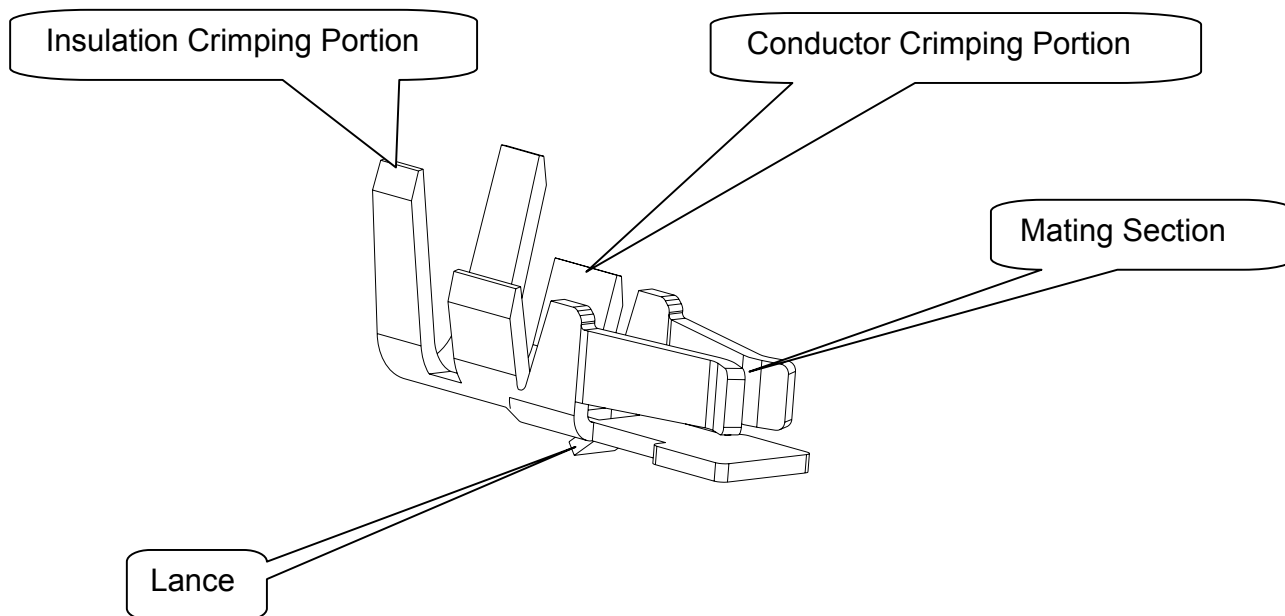

10 APPLICABLE WIRES: UL1007 ETFE WIRE

AWG Size:AWG#28~24#

Insulation OD: Φ 1.2mm~1.4mm

TITLE: 2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE

RELEASE DATE: 2018/08/17

REVISION: N



ECN No: ECN-1808348

PAGE: **12** OF **16**.

11 CRIMPING CONDITION

鉚線條件表 CRIMPING CONDITION

Part Number	Wire Specification			Crimp Height (mm)		Crimp Width (mm)	
	UL Style (REF.)	AWG Size	Insulation OD(mm)	Conductor A	Insulation B	Conductor W1	Insulation W2
86701-T	UL1007	28	1.20	0.55~0.62	1.1~1.35	1.3 Max.	1.5 Max.
50404-T	UL1007	26	1.30	0.60~0.67	1.4~1.65	1.3 Max.	1.5 Max.
51303-T	UL1007	24	1.40	0.65~0.72	1.7~1.95	1.3 Max.	1.5 Max.

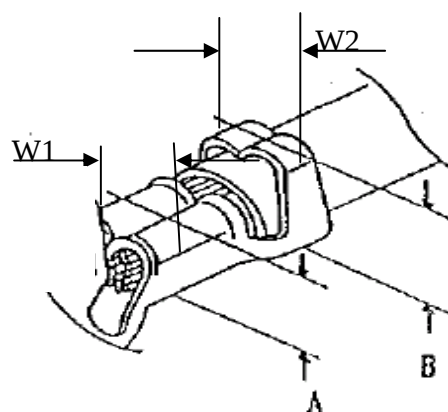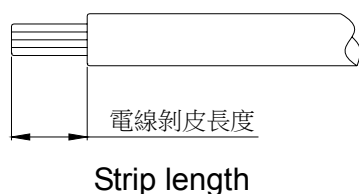

Note:

- 1、W1為芯線導體鉚壓後之寬度(Conductor Crimping Width)：W1值如上表
- 2、W2為電線外被部分鉚壓後之寬度(Insulation Crimping Width)：W2值如上表
- 3、A為芯線導體鉚壓後之高度(Conductor Crimping height)：A值如上表(參考值)
- 4、B為電線外被鉚壓後之高度(Insulation Crimping height)：B值如上表(參考值)
- 5、電線剝皮長度(Strip length)：1.5~1.9mm(參考值)

TITLE: **2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE**





RELEASE DATE: 2018/08/17

REVISION: N

ECN No: ECN-1808348

PAGE: **13** OF **16**.


12 CRIMPING HEIGHT MEASUREMENT

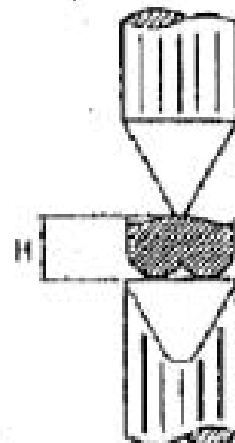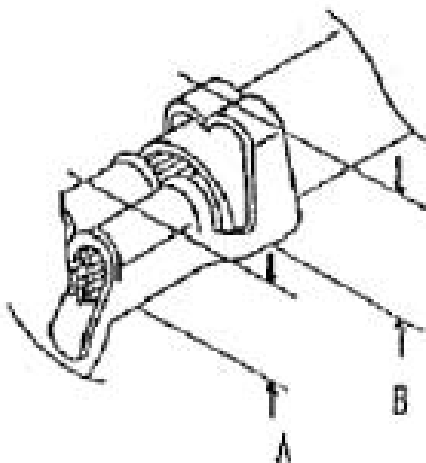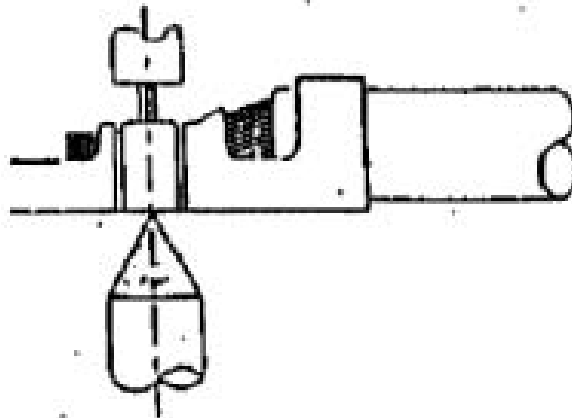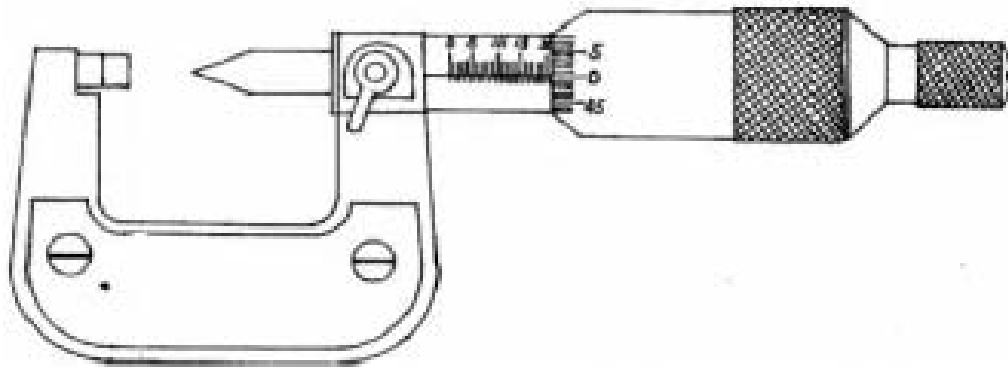

13 PULL FORCE OF CRIMPING SECTION MEASUREMENT




Before test samples, please measure crimp height and do not crimp insulation.

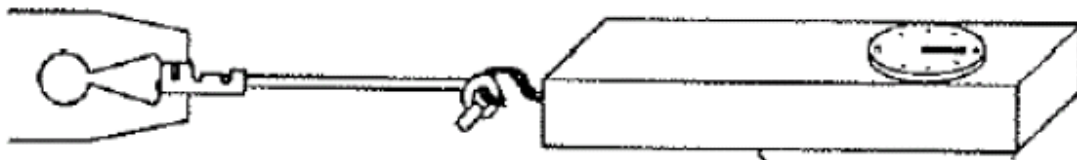


Pull Force of Crimp Section Measurement


14 STANDARD INSULATION CRIMPING

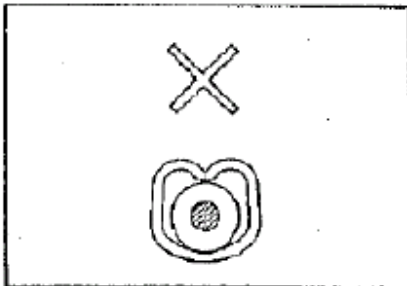


Not enough crimp

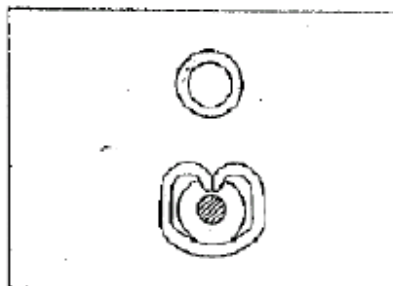


Good

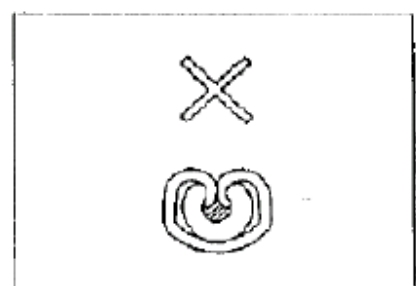

Crimp too much




Good



NG

Insulation Crimp Condition



As following figure shown.
It is no problem if wire bent
up down 90 degrees 1 cycle
and insulation position still
in ideal position.

TITLE: **2.0 mm PITCH WTB CONNECTOR.T/H D/R TYPE**



RELEASE DATE: 2018/08/17

REVISION: N


ECN No: ECN-1808348

PAGE: **15** OF **16**.


15 CONDUCTORS CRIMPING CONDITION

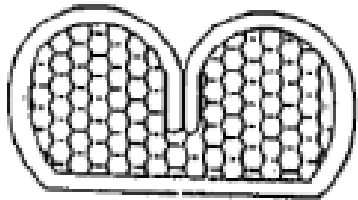

Good

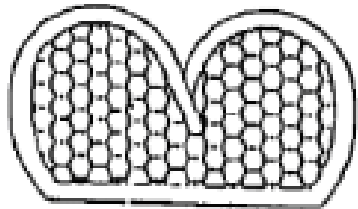


NG

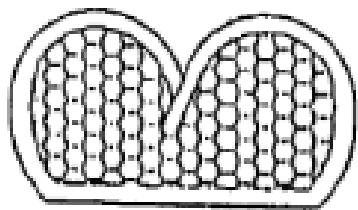


NG

Lower conduct
retension force




Good



Large burr

NG

16 CRIMPING REQUIREMENT

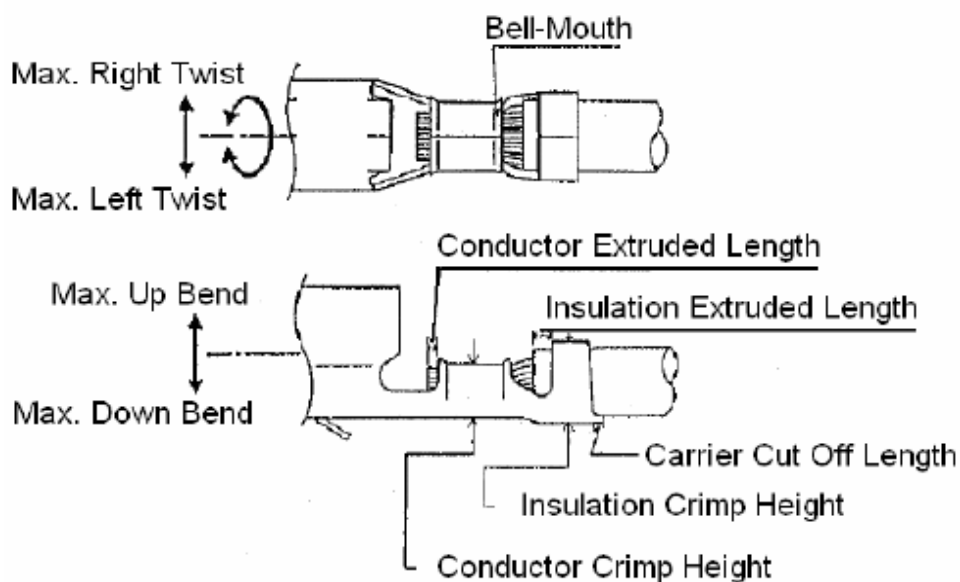

Item	Range(Ref.)
Max. Up Bend	6°
Max. Down Bend	6°
Max. Left Twist	5°
Max. Right Twist	5°
Bell-Mouth Length	0.1~0.3mm
Carrier Cut Off Length	0~0.2mm
Conductor Extruded Length	0.05~0.2mm